



# **Microsoft Office Word 2003 Rich Text Format (RTF) Specification**

White Paper

Published: April 2004

## Table of Contents

Introduction.....	1
RTF Syntax.....	2
Conventions of an RTF Reader.....	4
Formal Syntax.....	5
Contents of an RTF File.....	6
Header.....	6
Document Area.....	29
East ASIAN Support.....	142
Escaped Expressions.....	142
Character Set.....	143
Character Mapping.....	143
Font Family.....	143
Appendix A: Sample RTF Reader Application.....	153
How to Write an RTF Reader.....	154
A Sample RTF Reader Implementation.....	154
Notes on Implementing Other RTF Features.....	158
Other Problem Areas in RTF.....	158
Appendix B: Index of RTF Control Words.....	178
Special Characters and A-B.....	179
C-E.....	185
F-L.....	193
M-O.....	201
P-R.....	205
S-T.....	213
U-Z.....	223
Appendix C: Control Words introduced by other Microsoft Products.....	225
Pocket Word.....	225
Exchange (Used in RTF<->HTML Conversions).....	226



# Microsoft Office Word 2003 Rich Text Format (RTF) Specification

## White Paper

Published: *April 2004*

For the latest information, please see <http://www.microsoft.com/office/>

---

---

### For Microsoft® MS-DOS®, Windows®, and Apple Macintosh Applications

Version: RTF Version 1.8

Subject: Rich Text Format (RTF) Specification

Contents: 214 Pages

®

Microsoft Technical Support  
Specification

10/2003– Word 2003 RTF  
Specification

---

## Introduction

Rich Text Format (RTF) is a method of encoding formatted text and graphics for use within applications or for data and formatting transfer between applications. Currently, users depend on special translation software to move word-processing documents between various applications developed by different companies. RTF serves as both a standard of data transfer between word processing software, document formatting, and a means of migrating content from one operating system to another.

This document specifies the format used by RTF for text and graphics interchange. RTF uses ASCII (lower byte range – 7 bits) or the ANSI, PC-8, Macintosh, or IBM PC character sets to represent the formatting of a document. RTF files created in Microsoft Word 6.0 (and later) for the Macintosh and Power Macintosh have a file type of "RTF." However, earlier versions of Word do not necessarily support all the RTF commands noted in this specification. You must consult prior versions of this document for each version of Word that was developed prior to Word 2003 in order to determine which RTF commands were supported for that release. However, files previously created with an earlier version of Word using RTF should be read without problem by newer versions of Word.

Software that can convert a file to RTF is called an RTF writer. An RTF writer separates the application's control information from the actual text and writes a new file containing the text and the RTF command groups associated with that text. Software that reads an RTF file and is capable of displaying the formatting commands of the selected text on the screen as WYSIWIG is called an RTF reader.

A sample RTF parsing reader application is available (see [Appendix A: Sample RTF Reader Application](#) in this document). This sample RTF parsing reader is designed for use in conjunction with this document to assist those interested in developing their own RTF readers. This application and its use are described in [Appendix A](#). The sample RTF reader is not a for-sale product, and Microsoft does not provide technical support or any other kind of support for the sample RTF parsing reader code or this document.

RTF version 1.7 included many new control words introduced specifically for Microsoft Word for Windows 95 version 7.0, Microsoft Word 97 for Windows, Microsoft Word 98 for the Macintosh, Microsoft Word 2000 for Windows, and Microsoft Word 2002 for Windows, as well as other Microsoft

products. Version 1.8 includes new command extensions specifically for use with new features available in Microsoft Word 2003.

## RTF Syntax

RTF files are plain text, usually 7-bit ASCII (low seven bits), and consist of clear text control words, control symbols, and groups. RTF files are easily transmitted between most PC based operating systems because of their 7-bit ASCII characters. However, converters that communicate with Microsoft Word for Windows or Microsoft Word for the Macintosh should expect data transfer as 8-bit characters. Unlike most clear text files, there is no set maximum line length for an RTF file before a carriage return/line feed is expected. In fact, a carriage return line feed is never expected to be found in an RTF file and can be overlooked by some RTF readers when found in clear text segments.

### Control Word

An RTF **control word** is a specially formatted command used to mark characters for display on a monitor or characters destined for a printer. A control word cannot be longer than 32 characters.

A control word commonly takes the following form:

`\LetterSequence<Delimiter>`

Example:

`\par`

**Note** A backslash begins each control word and the control word is also case sensitive.

The LetterSequence is made up of alphabetic characters (a through z or A through Z). Control words (also known as Keywords) originally did not contain any uppercase characters, however in recent years uppercase characters have begun to appear in some newer control words.

A **Delimiter** commonly is used to mark the end of an RTF control word, and can be one of the following:

- A space.
- A numeric digit or a hyphen (-), which indicates that a numeric parameter is associated with the control word. The subsequent digital sequence is then delimited by a space or any character other than a letter or a digit (commonly another control word which begins with a backslash). The parameter can be a positive or negative number. The range of the values for the number is generally -32767 through 32767. However, Word tends to restrict the range to -31680 through 31680 and also allows values in the range -2,147,483,648 to 2,147,483,648 for a small number of keywords (specifically **\bin**, **\revdtm**, and some picture properties). An RTF parser must allow an arbitrary string of digits as a legal value for a keyword (providing it does not exceed value ranges noted earlier). The control word can then be delimited by a space, nonalphabetic or nonnumeric character, or a backslash "\" in the same manner as any other control word.
- Any character other than a letter or a digit. In this case, the delimiting character terminates the control word but is not actually part of the control word. Such as a backslash "\", which usually means a new control word follows.

If a single space delimits the control word, the space does not appear in the document (ignored). Any characters following the single space delimiter, including any subsequent spaces, will appear as text or spaces in the document. For this reason, you should use spaces only where necessary. It is recommended to not use spaces as a means of breaking up RTF syntax in order to make it easier to read.

## Control Symbol

A **control symbol** consists of a backslash followed by a single, nonalphabetic character. For example, `\~` (backslash tilde) represents a nonbreaking space. Control symbols do not have delimiters (no spaces are required between it and the next command).

## Group

A **group** can consist of text, control words, or control symbols enclosed in braces (`{ }`). The opening brace (`{`) indicates the start of the group and the closing brace (`}`) indicates the end of the group. Each group specifies the text affected by the group and the different attributes of that text. The RTF file can also include groups for fonts, styles, screen color, pictures, footnotes, comments (annotations), headers and footers, summary information, fields, and bookmarks, as well as document-, section-, paragraph-, and character-formatting properties. If the font, file, style, screen color, revision mark, and summary-information groups and document-formatting properties are included in the file, they must appear in the RTF header which precedes the RTF body, which contains the first plain-text character in the document. If any group is not used, it can be omitted. The groups are discussed in the following sections. Any group that uses the properties defined in another group, must appear after the group that defines those properties. For example, color and font properties must precede the style group.

The control properties of certain control words (such as bold, italic, keep together, and so on) have only two states. When such a control word has no parameter or has a nonzero parameter, it is assumed that the control word turns on the property. When such a control word has a parameter of 0, it is assumed that the control word turns off the property. For example, `\b` turns on bold, whereas `\b0` turns off bold.

## Destinations

Certain control words, referred to as **destinations**, mark the beginning of a collection of related text that could appear at another position, or destination, within the document. Destinations may also be text that is used but should not appear within the document at all. An example of a destination is the `\footnote` group, where the footnote text follows the control word. Page breaks cannot occur in destination text. Destination control words and their following text must be enclosed in braces. No other control words or text may appear within the destination group.

Destinations added after the RTF Specification published in the March 1987 *Microsoft Systems Journal* may be preceded by the control symbol `\*` (backslash asterisk). This control symbol identifies destinations whose related text should be ignored if the RTF reader does not recognize the destination control word. (RTF writers should follow the convention of using this control symbol when adding new destinations or groups.) Destinations whose related text should be inserted into the document even if the RTF reader does not recognize the destination should not use `\*`. All destinations that were not included in the March 1987 revision of the RTF Specification are shown with `\*` as part of the control word.

Formatting specified within a group affects only the text within that group (including nested groups within that group). Generally, text within a group inherits the formatting of the text in the outer or preceding group. However, Microsoft implementations of RTF assume that the footnote, annotation, header, and footer groups (described later in this specification) do not inherit the formatting of the preceding group. Therefore, to ensure that these groups are always formatted correctly, you should set the formatting within these groups to the appropriate default with the `\sectd`, `\pard`, and `\plain` control words, and then add any desired formatting.

The control words, control symbols, and braces constitute control information. All other characters in the file are plain text. Here is an example of plain text that does not exist within a group:

```
{\rtf\ansi\deff0{\fonttbl{\f0\froman Tms Rmn;}{\f1\fdcor Symbol;}{\f2\fswiss  
Helv;}}  
{\colortbl;\red0\green0\blue0;\red0\green0\blue255;\red0\green255\blue255;\red0\gree
```

```
n255\blue0;\red255\green0\blue255;\red255\green0\blue0;\red255\green255\blue0;\red25
5\green255\blue255;}{\stylesheet{\fs20 \snext0Normal;}}{\info{\author John Doe}
{\creatim\yr1990\mo7\dy30\hr10\min48}
{\version1}{\edmins0}{\nofpages1}{\nofwords0}{\nofchars0}{\vern8351}}\widocrl\ftnbj
\sectd\linex0\endnhere \pard\plain \fs20 This is plain text.\par}
```

Even though “This is plain text.” is not part of a group, it is part of the Body of the RTF file. And, it is subject to the formatting as specified after the \pard command. Specifically, the \pard resets any previous formatting and \fs20, defined in the “stylesheet” group, sets the text to \snext0Normal.

As previously mentioned, the backslash (\) and braces ({ }) have special meaning in RTF. To use these characters as text, precede them with a backslash, as in \\, \{, and \}.

## Conventions of an RTF Reader

The reader of an RTF stream is concerned with the following:

- Separating control information from plain text.
- Acting on control information.
- Collecting and properly inserting text into the document, as directed by the current group state.

Acting on control information is designed to be a relatively simple process. Some control information simply contributes special characters to the plain text stream. Other information serves to change the *program state*, which includes properties of the document as a whole, or to change any of a collection of *group states*, which apply to parts of the document.

As previously mentioned, a group state can specify the following:

- The *destination*, or part of the document that the plain text is constructing.
- Character-formatting properties, such as bold or italic.
- Paragraph-formatting properties, such as justified or centered.
- Section-formatting properties, such as the number of columns.
- Table-formatting properties, which define the number of cells and dimensions of a table row.

In practice, an RTF reader will evaluate each character it reads in sequence as follows:

- If the character is an opening brace ({), the reader stores its current state on the stack. If the character is a closing brace (}), the reader retrieves the current state from the stack.
- If the character is a backslash (\), the reader collects the control word or control symbol and its parameter, if any, and looks up the control word or control symbol in a table that maps control words to actions. It then carries out the action prescribed in the lookup table. (The possible actions are discussed in the following table.) The read pointer is left before or after a control-word delimiter, as appropriate.
- If the character is anything other than an opening brace ({), closing brace (}), or backslash (\), the reader assumes that the character is plain text and writes the character to the current destination using the current formatting properties.

If the RTF reader cannot find a particular control word or control symbol in the lookup table described in the preceding list, the control word or control symbol should be ignored. If a control word or control symbol is preceded by an opening brace (`{`), it is part of a group. The current state should be saved on the stack, but no state change should occur. When a closing brace (`}`) is encountered, the current state should be retrieved from the stack, thereby resetting the current state. If the `\*` control symbol precedes a control word, then it defines a destination group and was itself preceded by an opening brace (`{`). The RTF reader should discard all text up to and including the closing brace (`}`) that closes this group. All RTF readers must recognize all destinations defined in the March 1987 RTF Specification. The reader may skip past the group, but it is not allowed to simply discard the control word. Destinations defined since March 1987 are marked with the `\*` control symbol.

**Note** All RTF readers must implement the `\*` control symbol so that they can read RTF files written by newer RTF writers.

For control words or control symbols that the RTF reader can find in the lookup table, the possible actions are as follows.

Action	Description
Change Destination	The RTF reader changes the destination to the destination described in the table entry. Destination changes are legal only immediately after an opening brace ( <code>{</code> ). (Other restrictions may also apply; for example, footnotes cannot be nested.) Many destination changes imply that the current property settings will be reset to their default settings. Examples of control words that change destination are <code>\footnote</code> , <code>\header</code> , <code>\footer</code> , <code>\pict</code> , <code>\info</code> , <code>\fonttbl</code> , <code>\stylesheet</code> , and <code>\colortbl</code> . This specification identifies all destination control words where they appear in control-word tables.
Change Formatting Property	The RTF reader changes the property as described in the table entry. The entry will specify whether a parameter is required. <a href="#">Appendix B: Index of RTF Control Words</a> at the end of this Specification also specifies which control words require parameters. If a parameter is needed and not specified, then a default value is used. The default value used depends on the control word. If the control word does not specify a default, then all RTF readers should assume a default of 0.
Insert Special Character	The reader inserts into the document the character code or codes described in the table entry.
Insert Special Character and Perform Action	The reader inserts into the document the character code or codes described in the table entry and performs the action the entry specifies. For example, when Microsoft Word interprets <code>\par</code> , a paragraph mark is inserted in the document and special code is run to record the paragraph properties belonging to that paragraph mark.

## Formal Syntax

RTF uses the following syntax, based on Backus-Naur Form.

Syntax	Meaning
#PCDATA	Text (without control words).
#SDATA	Hexadecimal data.
#BDATA	Binary data.
'c'	A literal.
<text>	A nonterminal.
A	The (terminal) control word a, without a parameter.
a or aN	The (terminal) control word a, with a parameter.
A?	Item a is optional.
A+	One or more repetitions of item a.
A*	Zero or more repetitions of item a.
A b	Item a followed by item b.
A   b	Item a or item b.
a & b	Item a and/or item b, in any order.

## Contents of an RTF File

An RTF file has the following syntax:

```
<File>          '{' <header> <document> '}'
```

This syntax is the standard RTF syntax; any RTF reader must be able to correctly interpret RTF written to this syntax. It is worth mentioning again that RTF readers are not required to interpret all control words, but they must be able to harmlessly ignore unknown (or unused) control words, and they must correctly skip over destinations marked with the \\* control symbol. There may, however, be RTF writers that generate RTF that does not conform to this syntax, and as such, RTF readers should be robust enough to handle some minor variations. Nonetheless, if an RTF writer generates RTF conforming to this specification, then any correct RTF reader should be able to interpret it.

## Header

The header has the following syntax:

```
<header>          \rtf <charset> <deffont> \deff? <fonttbl> <filetbl>? <colortbl>? <stylesheet>? <listtables>?
                    <revtbl>? <rsidtable>? <generator>?
```

Each of the various header tables should appear, if they exist, in this order. Document properties can occur before and between the header tables. A property must be defined before being referenced. Specifically,

- The style sheet must occur before any style usage.
- The font table must precede any reference to a font.
- The \deff keyword must precede any text not explicitly formatted by a font, because it specifies the font to use in such cases.

## RTF Version

An entire RTF file is considered a group and must be enclosed in braces. The \rtfN control word must follow the opening brace. The numeric parameter **N** identifies the major version of the RTF Specification used. The RTF standard described in this specification, although titled as version 1.7, continues to correspond syntactically to RTF Specification version 1. Therefore, the numeric parameter **N** for the \rtf control word should still be emitted as 1.



## Character Set

After specifying the RTF version, you must declare the character set used in this document. The control word for the character set must precede any plain text or any table control words. The RTF Specification currently supports the following character sets.

Control word	Character set
\ansi	ANSI (the default)
\mac	Apple Macintosh
\pc	IBM PC code page 437
\pca	IBM PC code page 850, used by IBM Personal System/2 (not implemented in version 1 of Microsoft Word for OS/2)

## Unicode RTF

Word 2002 and Word 2003 are Unicode-enabled applications. Text is handled using the 16-bit Unicode character encoding scheme. Expressing this text in RTF requires a new mechanism, because until this release (version 1.6), RTF has only handled 7-bit characters directly and 8-bit characters encoded as hexadecimal. The Unicode mechanism described here can be applied to any RTF destination or body text.

Control word	Meaning																																																												
<code>\ansicpgN</code>	<p>This keyword represents the ANSI code page used to perform the Unicode to ANSI conversion when writing RTF text. <b>N</b> represents the code page in decimal. This is typically set to the default ANSI code page of the run-time environment (for example, <code>\ansicpg1252</code> for U.S. Windows). The reader can use the same ANSI code page to convert ANSI text back to Unicode. Possible values include the following:</p> <table> <tr><td>437</td><td>United States IBM</td></tr> <tr><td>708</td><td>Arabic (ASMO 708)</td></tr> <tr><td>709</td><td>Arabic (ASMO 449+, BCON V4)</td></tr> <tr><td>710</td><td>Arabic (transparent Arabic)</td></tr> <tr><td>711</td><td>Arabic (Nafitha Enhanced)</td></tr> <tr><td>720</td><td>Arabic (transparent ASMO)</td></tr> <tr><td>819</td><td>Windows 3.1 (United States and Western Europe)</td></tr> <tr><td>850</td><td>IBM multilingual</td></tr> <tr><td>852</td><td>Eastern European</td></tr> <tr><td>860</td><td>Portuguese</td></tr> <tr><td>862</td><td>Hebrew</td></tr> <tr><td>863</td><td>French Canadian</td></tr> <tr><td>864</td><td>Arabic</td></tr> <tr><td>865</td><td>Norwegian</td></tr> <tr><td>866</td><td>Soviet Union</td></tr> <tr><td>874</td><td>Thai</td></tr> <tr><td>932</td><td>Japanese</td></tr> <tr><td>936</td><td>Simplified Chinese</td></tr> <tr><td>949</td><td>Korean</td></tr> <tr><td>950</td><td>Traditional Chinese</td></tr> <tr><td>1250</td><td>Windows 3.1 (Eastern European)</td></tr> <tr><td>1251</td><td>Windows 3.1 (Cyrillic)</td></tr> <tr><td>1252</td><td>Western European</td></tr> <tr><td>1253</td><td>Greek</td></tr> <tr><td>1254</td><td>Turkish</td></tr> <tr><td>1255</td><td>Hebrew</td></tr> <tr><td>1256</td><td>Arabic</td></tr> <tr><td>1257</td><td>Baltic</td></tr> <tr><td>1258</td><td>Vietnamese</td></tr> <tr><td>1361</td><td>Johab</td></tr> </table> <p>This keyword should be emitted in the RTF header section right after the <code>\ansi</code>, <code>\mac</code>, <code>\pc</code> or <code>\pca</code> keyword.</p>	437	United States IBM	708	Arabic (ASMO 708)	709	Arabic (ASMO 449+, BCON V4)	710	Arabic (transparent Arabic)	711	Arabic (Nafitha Enhanced)	720	Arabic (transparent ASMO)	819	Windows 3.1 (United States and Western Europe)	850	IBM multilingual	852	Eastern European	860	Portuguese	862	Hebrew	863	French Canadian	864	Arabic	865	Norwegian	866	Soviet Union	874	Thai	932	Japanese	936	Simplified Chinese	949	Korean	950	Traditional Chinese	1250	Windows 3.1 (Eastern European)	1251	Windows 3.1 (Cyrillic)	1252	Western European	1253	Greek	1254	Turkish	1255	Hebrew	1256	Arabic	1257	Baltic	1258	Vietnamese	1361	Johab
437	United States IBM																																																												
708	Arabic (ASMO 708)																																																												
709	Arabic (ASMO 449+, BCON V4)																																																												
710	Arabic (transparent Arabic)																																																												
711	Arabic (Nafitha Enhanced)																																																												
720	Arabic (transparent ASMO)																																																												
819	Windows 3.1 (United States and Western Europe)																																																												
850	IBM multilingual																																																												
852	Eastern European																																																												
860	Portuguese																																																												
862	Hebrew																																																												
863	French Canadian																																																												
864	Arabic																																																												
865	Norwegian																																																												
866	Soviet Union																																																												
874	Thai																																																												
932	Japanese																																																												
936	Simplified Chinese																																																												
949	Korean																																																												
950	Traditional Chinese																																																												
1250	Windows 3.1 (Eastern European)																																																												
1251	Windows 3.1 (Cyrillic)																																																												
1252	Western European																																																												
1253	Greek																																																												
1254	Turkish																																																												
1255	Hebrew																																																												
1256	Arabic																																																												
1257	Baltic																																																												
1258	Vietnamese																																																												
1361	Johab																																																												
<code>\upr</code>	<p>This keyword represents a destination with two embedded destinations, one represented using Unicode and the other using ANSI. This keyword operates in conjunction with the <code>\ud</code> keyword to provide backward compatibility. The general syntax is as follows:</p> <pre>{\upr{keyword ansi_text}{\*\ud{keyword Unicode_text}}}</pre> <p>Notice that this keyword destination does not use the <code>\*</code> keyword; this forces the old RTF readers to pick up the ANSI representation and discard the Unicode one.</p>																																																												
<code>\ud</code>	<p>This is a destination that is represented in Unicode. The text is represented using a mixture of ANSI translation and use of <code>\uN</code> keywords to represent characters that do not have the exact ANSI equivalent.</p>																																																												

Control word	Meaning
<code>\uN</code>	<p>This keyword represents a single Unicode character that has no equivalent ANSI representation based on the current ANSI code page. <b>N</b> represents the Unicode character value expressed as a decimal number.</p> <p>This keyword is followed immediately by equivalent character(s) in ANSI representation. In this way, old readers will ignore the <code>\uN</code> keyword and pick up the ANSI representation properly. When this keyword is encountered, the reader should ignore the next <b>N</b> characters, where <b>N</b> corresponds to the last <code>\ucN</code> value encountered.</p> <p>As with all RTF keywords, a keyword-terminating space may be present (before the ANSI characters) that is not counted in the characters to skip. While this is not likely to occur (or recommended), a <code>\bin</code> keyword, its argument, and the binary data that follows are considered one character for skipping purposes. If an RTF scope delimiter character (that is, an opening or closing brace) is encountered while scanning skippable data, the skippable data is considered to be ended before the delimiter. This makes it possible for a reader to perform some rudimentary error recovery. To include an RTF delimiter in skippable data, it must be represented using the appropriate control symbol (that is, escaped with a backslash,) as in plain text. Any RTF control word or symbol is considered a single character for the purposes of counting skippable characters.</p> <p>An RTF writer, when it encounters a Unicode character with no corresponding ANSI character, should output <code>\uN</code> followed by the best ANSI representation it can manage. Also, if the Unicode character translates into an ANSI character stream with a count of bytes differing from the current Unicode Character Byte Count, it should emit the <code>\ucN</code> keyword prior to the <code>\uN</code> keyword to notify the reader of the change.</p> <p>RTF control words generally accept signed 16-bit numbers as arguments. For this reason, Unicode values greater than 32767 must be expressed as negative numbers.</p>
<code>\ucN</code>	<p>This keyword represents the number of bytes corresponding to a given <code>\uN</code> Unicode character. This keyword may be used at any time, and values are scoped like character properties. That is, a <code>\ucN</code> keyword applies only to text following the keyword, and within the same (or deeper) nested braces. On exiting the group, the previous <code>\uc</code> value is restored. The reader must keep a stack of counts seen and use the most recent one to skip the appropriate number of characters when it encounters a <code>\uN</code> keyword. When leaving an RTF group that specified a <code>\uc</code> value, the reader must revert to the previous value. A default of 1 should be assumed if no <code>\uc</code> keyword has been seen in the current or outer scopes.</p> <p>A common practice is to emit no ANSI representation for Unicode characters within a Unicode destination context (that is, inside a <code>\ud</code> destination). Typically, the destination will contain a <code>\uc0</code> control sequence. There is no need to reset the count on leaving the <code>\ud</code> destination, because the scoping rules will ensure the previous value is restored.</p>

### Document Text

Document text should be emitted as ANSI characters. If there are Unicode characters that do not have corresponding ANSI characters, they should be output using the `\ucN` and `\uN` keywords.

For example, the text **LabΓValue** (Unicode characters 0x004c, 0x0061, 0x0062, 0x0393, 0x0056, 0x0061, 0x006c, 0x0075, 0x0065) should be represented as follows (assuming a previous `\ucl`):

```
Lab\u915GValue
```

### Destination Text

Destination text is defined as any text represented in an RTF destination. A good example is the bookmark name in the `\bkmkstart` destination.

Any destination containing Unicode characters should be emitted as two destinations within a `\upr` destination to ensure that old readers can read it properly and that no Unicode character encoding is lost when read with a new reader.

For example, a bookmark name **LabΓValue** (Unicode characters 0x004c, 0x0061, 0x0062, 0x0393, 0x0056, 0x0061, 0x006c, 0x0075, 0x0065) should be represented as follows:

```
{\upr{\* \bkmkstart LabGValue}{\* \ud{\* \bkmkstart Lab\u915Value}}}
```

The first subdestination contains only ANSI characters and is the representation that old readers will see. The second subdestination is a **\\*\ud** destination that contains a second copy of the **\bkmkstart** destination. This copy can contain Unicode characters and is the representation that Unicode-aware readers must pay attention to, ignoring the ANSI-only version.

## Default Fonts

Default font settings can be used to tell the program what regional settings are appropriate as defaults. For example, having a Japanese font set in **\stshfdbchN** would tell Word to enable Japanese formatting options. **N** refers to an entry in the font table.

<b>&lt;deffont&gt;</b>	<b>\stshfdbchN \stshflochN \stshfhichN \stshfbi</b>
<b>\stshfdbchN</b>	Defines what font should be used by default in the style sheet for East Asian characters.
<b>\stshflochN</b>	Defines what font should be used by default in the style sheet for ASCII characters.
<b>\stshfhichN</b>	Defines what font should be used by default in the style sheet for High-ANSI characters.
<b>\stshfbi</b>	Defines what font should be used by default in the style sheet for Complex Scripts (BiDi) characters.

Default font settings can be used to tell the program what regional settings are appropriate as defaults. For example, having a Japanese font set in **\stshfdbchN** would tell Word to enable Japanese formatting options. **N** refers to an entry in the font table.

## Font Table

The **\fonttbl** control word introduces the font table group. Unique **\fN** control words define each font available in the document, and are used to reference that font throughout the document. The font table group has the following syntax.

<b>&lt;fonttbl&gt;</b>	<b>'{ \fonttbl (&lt;fontinfo&gt;   ('{&lt;fontinfo&gt; '})+ '}'</b>
<b>&lt;fontinfo&gt;</b>	<b>&lt;fontnum&gt; &lt;fontfamily&gt; &lt;fcharset&gt;? &lt;fprq&gt;? &lt;panose&gt;? &lt;nontaggedname&gt;? &lt;fontemb&gt;? &lt;codepage&gt;? &lt;fontname&gt; &lt;fontaltname&gt;? ';</b>
<b>&lt;fontnum&gt;</b>	<b>\f</b>
<b>&lt;fontfamily&gt;</b>	<b>\fnil   \froman   \fswiss   \fmodern   \fscript   \fdecor   \fttech   \fbidi</b>
<b>&lt;fcharset&gt;</b>	<b>\fcharset</b>
<b>&lt;fprq&gt;</b>	<b>\fprq</b>
<b>&lt;panose&gt;</b>	<b>&lt;data&gt;</b>
<b>&lt;nontaggedname&gt;</b>	<b>\*\fname</b>
<b>&lt;fontname&gt;</b>	<b>#PCDATA</b>
<b>&lt;fontaltname&gt;</b>	<b>'{\* \falt #PCDATA '}'</b>
<b>&lt;fontemb&gt;</b>	<b>'{\* \fontemb &lt;fonttype&gt; &lt;fontfname&gt;? &lt;data&gt;? '}'</b>
<b>&lt;fonttype&gt;</b>	<b>\ftruetype   \ftruetype</b>
<b>&lt;fontfname&gt;</b>	<b>'{\* \fontfile &lt;codepage&gt;? #PCDATA '}'</b>
<b>&lt;codepage&gt;</b>	<b>\cpg</b>

**Note** For **<fontemb>**, either **<fontfname>** or **<data>** must be present, although both may be present.

All fonts available to the RTF writer can be included in the font table, even if the document doesn't use all the fonts.

RTF also supports font families so that applications can attempt to intelligently choose fonts if the exact font is not present on the reading system. RTF uses the following control words to describe the various font families.

Control word	Font family	Examples
\fnil	Unknown or default fonts (the default)	Not applicable
\froman	Roman, proportionally spaced serif fonts	Times New Roman, Palatino
\fswiss	Swiss, proportionally spaced sans serif fonts	Arial
\fmodern	Fixed-pitch serif and sans serif fonts	Courier New, Pica
\fscript	Script fonts	Cursive
\fdecor	Decorative fonts	Old English, ITC Zapf Chancery
\fttech	Technical, symbol, and mathematical fonts	Symbol
\fbidi	Arabic, Hebrew, or other bidirectional font	Miriam

If an RTF file uses a default font, the default font number is specified with the **\defn** control word, which must precede the font-table group. The RTF writer supplies the default font number used in the creation of the document as the numeric argument **N**. The RTF reader then translates this number through the font table into the most similar font available from the reader's operating system.

The following control words specify the character set, alternative font name, pitch of a font in the font table, and nontagged font name.

Control word	Meaning
\fcharset $N$	Specifies the character set of a font in the font table. Values for $N$ are defined by Windows header files: <ul style="list-style-type: none"> <li>0 ANSI</li> <li>1 Default</li> <li>2 Symbol</li> <li>3 Invalid</li> <li>77 Mac</li> <li>128 Shift Jis</li> <li>129 Hangul</li> <li>130 Johab</li> <li>134 GB2312</li> <li>136 Big5</li> <li>161 Greek</li> <li>162 Turkish</li> <li>163 Vietnamese</li> <li>177 Hebrew</li> <li>178 Arabic</li> <li>179 Arabic Traditional</li> <li>180 Arabic user</li> <li>181 Hebrew user</li> <li>186 Baltic</li> <li>204 Russian</li> <li>222 Thai</li> <li>238 Eastern European</li> <li>254 PC 437</li> <li>255 OEM</li> </ul>
\falt	Indicates alternate font name to use if the specified font in the font table is not available. '{\*'\falt <Alternate Font Name>}'
\fprq $N$	Specifies the pitch of a font in the font table.
\*\panose	Destination keyword. This destination contains a 10-byte Panose 1 number. Each byte represents a single font property as described by the Panose 1 standard specification.
\*\fname	This is an optional control word in the font table to define the nontagged font name. This is the actual name of the font without the tag, used to show which character set is being used. For example, Arial is a nontagged font name, and Arial (Cyrillic) is a tagged font name. This control word is used by WordPad. Word ignores this control word (and never creates it).
\fbias $N$	Used to arbitrate between two fonts when a particular character can exist in either a non- East Asian or East Asian font. Word 97 through Word 2003 emit the \fbias $N$ keyword only in the context of bullets or list information (that is, a \listlevel destination). The default value of 0 for $N$ indicates a non-East Asian font. A value of 1 indicates an East Asian font. Additional values may be defined in future releases.

If **\fprq** is specified, the  **$N$**  argument can be one of the following values.

Pitch	Value
Default pitch	0
Fixed pitch	1
Variable pitch	2

## Font Embedding

RTF supports embedded fonts with the **\fontemb** group located inside a font definition. An embedded font can be specified by a file name, or the actual font data may be located inside the group. If a file name is specified, it is contained in the **\fontfile** group. The **\cpq** control word can be used to specify the character set for the file name.

RTF supports TrueType® and other embedded fonts. The type of the embedded font is described by the following control words.

Control word	Embedded font type
\ftnil	Unknown or default font type (the default)
\fttruetype	TrueType font

## Code Page Support

A font may have a different character set from the character set of the document. For example, the Symbol font has the same characters in the same positions both on the Macintosh and in Windows. RTF describes this with the **\cpq** control word, which names the character set used by the font. In addition, file names (used in field instructions and in embedded fonts) may not necessarily be the same as the character set of the document; the **\cpq** control word can change the character set for these file names as well. However, all RTF documents must still declare a character set (that is, **\ansi**, **\mac**, **\pc**, or **\pca**) to maintain backward compatibility with earlier RTF readers.

The following table describes valid values for **\cpq**.

<b>Value</b>	<b>Description</b>
437	United States IBM
708	Arabic (ASMO 708)
709	Arabic (ASMO 449+, BCON V4)
710	Arabic (transparent Arabic)
711	Arabic (Nafitha Enhanced)
720	Arabic (transparent ASMO)
819	Windows 3.1 (United States and Western Europe)
850	IBM multilingual
852	Eastern European
860	Portuguese
862	Hebrew
863	French Canadian
864	Arabic
865	Norwegian
866	Soviet Union
874	Thai
932	Japanese
936	Simplified Chinese
949	Korean
950	Traditional Chinese
1250	Windows 3.1 (Eastern European)
1251	Windows 3.1 (Cyrillic)
1252	Western European
1253	Greek
1254	Turkish
1255	Hebrew
1256	Arabic
1257	Baltic
1258	Vietnamese
1361	Johab

## File Table

The **\filetbl** control word introduces the file table destination. The only time a file table is created in RTF is when the document contains subdocuments. The file table group defines the files referenced in the document and has the following syntax:

<b>&lt;filetbl&gt;</b>	<b>'{\* \filetbl ('{' &lt;fileinfo&gt; '})+ '}'</b>
<b>&lt;fileinfo&gt;</b>	<b>\file &lt;filenum&gt;&lt;relpath&gt;?&lt;osnum&gt;? &lt;filesource&gt;+ &lt;file name&gt;</b>
<b>&lt;filenum&gt;</b>	<b>\fid</b>
<b>&lt;relpath&gt;</b>	<b>\frelative</b>
<b>&lt;osnum&gt;</b>	<b>\fosnum</b>
<b>&lt;filesource&gt;</b>	<b>\fvalidmac   \fvaliddos   \fvalidntfs   \fvalidhpfs   \fnetwork   \fnonfilesys</b>
<b>&lt;file name&gt;</b>	<b>#PCDATA</b>



**Note** The file name can be any valid alphanumeric string for the named file system, indicating the complete path and file name.

Control word	Meaning
\filetbl	A list of documents referenced by the current document. The file table has a structure analogous to the style or font table. This is a destination control word output as part of the document header.
\file	Marks the beginning of a file group, which lists relevant information about the referenced file. This is a destination control word.
\fidN	File ID number. Files are referenced later in the document using this number.
\frelativeN	The character position within the path (starting at 0) where the referenced file's path starts to be relative to the path of the owning document. For example, if a document is saved to the path C:\Private\Resume\File1.doc and its file table contains the path C:\Private\Resume\Edu\File2.doc, then that entry in the file table will be \frelative18, to point at the character "E" in "Edu". This allows preservation of relative paths.
\fosnumN	Currently only filled in for paths from the Macintosh file system. It is an operating system-specific number for identifying the file, which may be used to speed up access to the file or find the file if it was moved to another folder or disk. The Macintosh operating system name for this number is the "file id." Additional meanings of the \fosnumN control word may be defined for other file systems in the future.
\validmac	Macintosh file system.
\validdos	MS-DOS file system.
\validntfs	NTFS file system.
\validhpfs	HPFS file system.
\network	Network file system. This control word may be used in conjunction with any of the previous file source control words.
\nonfilesys	Indicates http/odma.

## Color Table

The **\colortbl** control word introduces the color table group, which defines screen colors, character colors, and other color information. The color table group has the following syntax:

```
<colortbl>      '{' \colortbl <colordef>+ '}'
<colordef>      \red ? & \green ? & \blue ? ';'

```

The following are valid control words for this group.

Control word	Meaning
\redN	Red index
\greenN	Green index
\blueN	Blue index

Each definition must be delimited by a semicolon, even if the definition is omitted. If a color definition is omitted, the RTF reader uses its default color. The following example defines the default color table used by Word. The first color is omitted, as shown by the semicolon following the **\colortbl** control word. The missing definition indicates that color 0 is the "auto" color.

```
{\colortbl;\red0\green0\blue0;\red0\green0\blue255;\red0\green255\blue255;\red0\green255\blue0;\red255\green0\blue255;\red255\green0\blue0;\red255\green255\blue0;\red255\green255\blue255;\red0\green0\blue128;\red0\green128\blue128;\red0\green128\blue0;\red128\green0\blue128;\red128\green0\blue0;\red128\green128\blue0;\red128\green128\blue128;\red192\green192\blue192;}
```

The foreground and background colors use indexes into the color table to define a color. For more information on color setup, see your Windows documentation.

The following example defines a block of text in color (where supported). Note that the **cf/cb** index (color foreground/color background) is the index of an entry in the color table, which represents a red/green/blue color combination.

```
{\f1\cb1\cf2 This is colored text. The background is color 1 and the foreground is color 2.}
```

If the file is read by software that does not display color, the reader should ignore the color table group.

## Style Sheet

The `\stylesheet` control word introduces the style sheet group, which contains definitions and descriptions of the various styles used in the document. All styles in the document's style sheet can be included, even if not all the styles are used. In RTF, a style is a form of shorthand used to specify a set of character, paragraph, or section formatting.

The style sheet group has the following syntax:

<code>&lt;stylesheet&gt;</code>	<code>'{' \stylesheet &lt;style&gt;+ '}'</code>
<code>&lt;style&gt;</code>	<code>'{' &lt;styledef&gt;?&lt;keycode&gt;? &lt;formatting&gt; &lt;additive&gt;? &lt;based&gt;? &lt;next&gt;? &lt;autoupd&gt;? &lt;link&gt;? &lt;locked&gt;? &lt;hidden&gt;? &lt;semihidden&gt;? &lt;personal&gt;? &lt;compose&gt;? &lt;reply&gt;? &lt;styleid&gt;? &lt;stylename&gt;? ';' '}'</code>
<code>&lt;styledef&gt;</code>	<code>\s   \* \cs   \ds   \ts \tsrowd</code>
<code>&lt;keycode&gt;</code>	<code>'{' \keycode &lt;keys&gt; '}'</code>
<code>&lt;keys&gt;</code>	<code>( \shift? &amp; \ctrl? &amp; \alt?) &lt;key&gt;</code>
<code>&lt;key&gt;</code>	<code>\fn   #PCDATA</code>
<code>&lt;additive&gt;</code>	<code>\additive</code>
<code>&lt;based&gt;</code>	<code>\sbasedon</code>
<code>&lt;next&gt;</code>	<code>\snext</code>
<code>&lt;autoupd&gt;</code>	<code>\sautoupd</code>
<code>&lt;hidden&gt;</code>	<code>\shidden</code>
<code>&lt;link&gt;</code>	<code>\slinkN</code>
<code>&lt;locked&gt;</code>	<code>\slocked</code>
<code>&lt;personal&gt;</code>	<code>\spersonal</code>
<code>&lt;compose&gt;</code>	<code>\scompose</code>
<code>&lt;reply&gt;</code>	<code>\sreply</code>
<code>&lt;formatting&gt;</code>	<code>(&lt;brdrdef&gt;   &lt;parfmt&gt;   &lt;apoclt&gt;   &lt;tabdef&gt;   &lt;shading&gt;   &lt;chrfmt&gt;)+</code>
<code>&lt;styleid&gt;</code>	<code>\styrsidN</code>
<code>&lt;semihidden&gt;</code>	<code>\ssemihidden</code>
<code>&lt;stylename&gt;</code>	<code>#PCDATA</code>

For `<style>`, both `<styledef>` and `<stylename>` are optional; the default is paragraph style 0. Note for `<stylename>` Microsoft Word for the Macintosh interprets commas in `#PCDATA` as separating style synonyms. Also, for `<key>`, the data must be exactly one character.

Control word	Meaning
\* \cs <i>N</i>	Designates character style. Like \s, \cs is not a destination control word. However, it is important to treat it like one inside the style sheet; that is, \cs must be prefixed with \* and must appear as the first item inside a group. Doing so ensures that readers that do not understand character styles will skip the character style information correctly. When used in body text to indicate that a character style was applied, do not include the \* prefix.
\s <i>N</i>	Designates paragraph style.
\ds <i>N</i>	Designates section style.
\ts <i>N</i>	Designates table style, in the same style as \cs for placement and prefixes.
\tsrowd	Like \trowd but for table style definitions.
\additive	Used in a character style definition ('{\* \cs...}'). Indicates that character style attributes are to be added to the current paragraph style attributes, rather than setting the paragraph attributes to only those defined in the character style definition.
\sbasedon <i>N</i>	Defines the number of the style the current style is based on (the default is 222—no style).
\snext <i>N</i>	Defines the style to be used in the next paragraph after the paragraph marked by this style. If it is omitted, the next style is the current style.
\sautoupd	Automatically update styles.
\shidden	Style does not appear in the Styles drop-down list in the Style dialog box <sup>1</sup> (on the Format menu, click Styles).
\slink <i>N</i>	The style is linked to the style whose stylesheet index is denoted by <i>N</i> . A paragraph style is linked to a character style when they share the same font properties and the character style is updated when the paragraph style changes. Normally Word will suppress the display of the linked character style in most style lists.
\slocked	The style is locked. It cannot be used in the current document if protection is on.
\spersonal	Style is a personal e-mail style.
\scompose	Style is the e-mail compose style.
\sreply	Style is the e-mail reply style.
\stysid <i>N</i>	Tied to the rsid table, <i>N</i> is the rsid of the author who implemented the style.
\ssemihidden	Style does not appear in drop-down menus.
\keycode	This group is specified within the description of a style in the style sheet in the RTF header. The syntax for this group is '{\* \keycode <keys>}' where <keys> are the characters used in the key code. For example, a style, Normal, may be defined {\s0 {\* \keycode \shift\ctrl n}Normal;} within the RTF style sheet. See the <a href="#">Special Character</a> control words for the characters outside the alphanumeric range that may be used.
\alt	The ALT modifier key. Used to describe shortcut key codes for styles.
\shift	The SHIFT modifier key. Used to describe shortcut key codes for styles.
\ctrl	The CTRL modifier key. Used to describe shortcut key codes for styles.
\fn <i>N</i>	Specifies a function key where <i>N</i> is the function key number. Used to describe shortcut-key codes for styles.

The following is an example of an RTF style sheet:

```
{\stylesheet{\ql
\li0\ri0\widctlpar\aspalpha\aspnum\faauto\adjustright\rin0\lin0\itap0
\fs24\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 \snext0 Normal;}{\* \cs10
\additive Default Paragraph Font;}{\* \cs15 \additive \b\ul\cf6 \sbasedon10
UNDERLINE;} {\* \ts11\tsrowd\trftsWidthB3\trpaddl108\trpaddr108\trpaddfl3
\trpaddft3\trpaddfb3\trpaddfr3\tscellwidthfts0\tsvertalt\tsbrdr\tsbrdr1\tsbrdrb\tsb
rdr\tsbrdrdgl\tsbrdrdgr\tsbrdrh\tsbrdrv \ql
```

<sup>1</sup> The hidden style property can only be accessed using Microsoft® Visual Basic® for Applications.

```

\li0\ri0\widctlpar\aspalpha\aspnum\faauto\adjustright\rin0 \lin0\itap0
\fs20\lang1024\langfe1024\cgrid\langnp1024 \langfenp1024 \snext11 \ssemihidden
Normal Table; }{\s16\qc
\li0\ri0\widctlpar\aspalpha\aspnum\faauto\adjustright\rin0\lin0\itap0
\b\fs24\cf2\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 \sbasedon0 \snext16
\sautoupd CENTER;}}

```

An example of the usage of these styles in an RTF paragraph:

```

\pard\plain \ql
\li0\ri0\widctlpar\aspalpha\aspnum\faauto\outlinelevel0\adjustright\rin0\lin0\itap0
\fs24\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 {This is the Normal Style
\par }\pard \ql
\li0\ri0\widctlpar\aspalpha\aspnum\faauto\adjustright\rin0\lin0\itap0
{\par }\pard\plain \s16\qc
\li0\ri0\widctlpar\aspalpha\aspnum\faauto\outlinelevel0\adjustright
\rin0\lin0\itap0 \b\fs24\cf2\lang1033\langfe1033\cgrid\langnp1033\langfenp1033
{This is a centered paragraph with blue, bold font. I call the style CENTER.\par }
\pard\plain \ql
\li0\ri0\widctlpar\aspalpha\aspnum\faauto\adjustright\rin0\lin0\itap0
\fs24\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 {\par The word \'93}
{\cs15\b\ul\cf6 style}{\'94 is red and underlined. I used a style I called
UNDERLINE.\par }

```

Some of the control words used in this example are discussed in later sections. Note that the properties of the style were emitted following the application of the style. This was done for two reasons: (1) to allow RTF readers that don't support styles to still display formatting correctly; and (2) to reveal the additive model for styles, where additional property changes are "added" on top of the defined style. Some RTF readers may not "apply" a style when only the style number is used, unless the accompanying formatting information is provided as well.

## Table Styles

Word 2002 introduced table styles. Table styles are like other styles in that they contain properties to be shared by many tables. Unlike the other styles though, table styles allow for conditional formatting, such as specifically coloring the first row.

To address the issue of older readers opening newer RTF files, raw properties were implemented. Older readers can still see the regular properties and edit them, but newer readers should be able to read the RTF back in and not lose any style functionality. This leaves two types of properties, those applied by older writers that are readable by older readers, and those the user applied directly to override aspects of the style. The user-applied changes are referred to as "raw" and have a higher priority than their non-raw counterparts.

The following table describes keywords available for style definitions. Any older table formatting properties may be used as well.

Control word	Meaning
<code>\tscellwidthN</code>	Currently emitted but has no effect.
<code>\tscellwidthftsN</code>	Currently emitted but has no effect.
<code>\tscellpaddtN</code>	Top padding value.
<code>\tscellpaddlN</code>	Left padding value.
<code>\tscellpaddrN</code>	Right padding value
<code>\tscellpaddbN</code>	Bottom padding value
<code>\tscellpaddftN</code>	Units for <code>\tscellpaddtN</code> 0      Auto 3      Twips
<code>\tscellpaddflN</code>	Units for <code>\tscellpaddlN</code> 0      Auto 3      Twips
<code>\tscellpaddfrN</code>	Units for <code>\tscellpaddrN</code> 0      Auto 3      Twips
<code>\tscellpaddfbN</code>	Units for <code>\tscellpaddbN</code> 0      Auto 3      Twips
<code>\tsvertalt</code>	Top vertical alignment of cell
<code>\tsvertalc</code>	Center vertical alignment of cell
<code>\tsvertalb</code>	Bottom vertical alignment of cell
<code>\tsnowrap</code>	No cell wrapping
<code>\tscellcfpat</code>	Foreground cell shading color
<code>\tscellcbpatN</code>	Background cell shading color
<code>\tscellpctN</code>	Cell shading percentage – <i>N</i> is the shading of a table cell in hundredths of a percent
<code>\tsbgbdiag</code>	Cell shading pattern – backward diagonal (////)
<code>\tsbgfdiag</code>	Cell shading pattern – forward diagonal (\\\\\\)
<code>\tsbgdkbdiag</code>	Cell shading pattern – dark backward diagonal (////)
<code>\tsbgdkfdiag</code>	Cell shading pattern – dark forward diagonal (\\\\\\)
<code>\tsbgcross</code>	Cell shading pattern – cross
<code>\tsbgdcross</code>	Cell shading pattern – diagonal cross
<code>\tsbgdkcross</code>	Cell shading pattern – dark cross
<code>\tsbgdkdcross</code>	Cell shading pattern – dark diagonal cross
<code>\tsbgchoriz</code>	Cell shading pattern – horizontal
<code>\tsbgvert</code>	Cell shading pattern – vertical
<code>\tsbgdkhor</code>	Cell shading pattern – dark horizontal
<code>\tsbgdkvert</code>	Cell shading pattern – dark vertical
<code>\tsbrdrt</code>	Top border for cell
<code>\tsbrdrb</code>	Bottom border for cell
<code>\tsbrdrl</code>	Left border for cell
<code>\tsbrdrr</code>	Right border for cell
<code>\tsbrdrh</code>	Horizontal (inside) border for cell

Control word	Meaning
\tsbrdrv	Vertical (inside) border for cell
\tsbrdrdgl	Diagonal (top left to bottom right) border for cell
\tsbrdrdgr	Diagonal (bottom left to top right) border for cell
\tscbandsh <i>N</i>	Count of rows in a row band
\tscbandsv <i>N</i>	Count of cells in a cell band

## Style and Formatting Restrictions

The style restrictions group has the following syntax:

<stylerestrictions>	{ \* \latentstyles \lsdstimax <i>N</i> \lsdlockeddef <i>N</i> <exceptions>? }
<exceptions>	{ \lsdlockedexcept <stylenames>+ }
<stylenames>	<stylename> ;
<stylename>	#PCDATA

Control word	Meaning
\latentstyles	Indicates that there are style and formatting usage restrictions in the document.
\lsdstimax <i>N</i>	Indicates how many styles will get the default value specified by \lsdlockeddef <i>N</i> . The number will be the same for all files emitted by a given Word version.
\lsdlockeddef <i>N</i>	Indicates that no direct formatting can be applied to the document and styles are allowed or disallowed according to <i>N</i> : <ul style="list-style-type: none"> <li>0 Assume all styles are allowed except for those specified by \lsdlockedexcept.</li> <li>1 Assume all styles are disallowed except those specified by \lsdlockedexcept.</li> </ul> Note that the \autofmtoverride document property can allow AutoFormat to apply direct formatting.
\lsdlockedexcept	Exceptions to the lockdown mode specified by \lsdlockeddef <i>N</i> . It is followed by a semicolon-separated list of allowed styles (by name) that are not covered by the protection.

The following is an example illustrating the style restrictions which disallows all styles except Normal, Heading 1, heading 2, heading 3, Default Paragraph Font, HTML Top of Form, HTML Bottom of Form, Normal Table, and No List:

```
{\*\latentstyles\lsdstimax156\lsdlockeddef1{\lsdlockedexcept Normal;heading
1;heading 2;heading 3;Default Paragraph Font;HTML Top of Form;HTML Bottom of
Form;Normal Table;No List;}}
```

**Note** \annotprot is emitted when locking styles for backward compatibility purposes, but it is ignored by Word 2003 when reading in documents with style protection.

## List Tables

Word 97, Word 2000, Word 2002, and Word 2003 store bullets and numbering information very differently from earlier versions of Word. In Word 6.0, for example, number formatting data is stored individually with each paragraph. In Word 97 and later versions, however, all of the formatting information is stored in a pair of document-wide list tables that act as a style sheet, and each individual paragraph stores only an index to one of the tables, like a style index.

There are two list tables in Word: the List table (destination **\listtable**), and the List Override table (destination **\listoverridetable**).

## List Table

The first table Word stores is the List table. A List table is a list of lists (destination **\list**). Each list contains a number of list properties that pertain to the entire list, and a list of levels (destination **\listlevel**), each of which contains properties that pertain only to that level. The **\listpicture** destination contains all of the picture bullets used in the document, with a **\shppict** headed list of **\pict** entries. These are referenced within the list by the **\levelpictureN** keyword, with **N** referring to an element in the list, starting at 0.

The syntax for the List table is as follows:

<listtable>	{ * <b>\listtable</b> <listpicture>? <list>+ }
<listpicture>	{ * <b>\listpicture</b> <shppictlist> }
<list>	<b>\list</b> <b>\listtemplateid</b> & ( <b>\listsimple</b>   <b>listhybrid</b> )? & <listlevel>+ & <b>\listrestarthdn</b> & <b>\listid</b> & ( <b>\listname</b> #PCDATA ';' ) <b>\liststyleid</b> ? <b>\liststylename</b> ?
<listlevel>	<number> <justification> & <b>\leveljcnN</b> ? & <b>\levelstartatN</b> & ( <b>\leveloldN</b> & <b>\levelprevN</b> ? & <b>\levelprevspaceN</b> ? & <b>\levelspaceN</b> ? & <b>\levelindentN</b> ?)? & <leveltext> & <levelnumbers> & <b>\levelfollowN</b> & <b>\levellegalN</b> ? & <b>\levelnorestartN</b> ? & <chrfmt>? & <b>\levelpictureN</b> & <b>\i</b> ? & <b>\fi</b> ? & (\jclisttab <b>\tx</b> )?
<number>	<b>\levelnfcN</b>   <b>\levelnfcnN</b>   ( <b>\levelnfcN</b> & <b>\levelnfcnN</b> )
<justification>	<b>\leveljcN</b>   <b>\leveljcnN</b>   ( <b>\leveljcN</b> & <b>\leveljcnN</b> )
<leveltext>	{ <b>\leveltext</b> <b>\leveltemplateid</b> ? #SDATA ';' }
<levelnumbers>	{ <b>\levelnumbers</b> #SDATA ';' }

## Top-Level List Properties

Control word	Meaning
<b>\listidN</b>	Each list must have a unique list ID that should be randomly generated. The value <i>N</i> is a long integer. The list ID cannot be between -1 and -5.
<b>\listtemplateidN</b>	Each list should have a unique template ID as well, which also should be randomly generated. The template ID cannot be -1. The value <i>N</i> is a long integer.
<b>\listsimpleN</b>	1 if the list has one level; 0 (default) if the list has nine levels.
<b>\listhybrid</b>	Present if the list has 9 levels, each of which is the equivalent of a simple list. Only one of <b>\listsimple</b> and <b>\listhybrid</b> should be present. Word 2000 and newer versions will write lists with the <b>\listhybrid</b> property.
<b>\listrestarthdnN</b>	1 if the list restarts at each section; 0 if not. Used for Word 7.0 compatibility only.
<b>\listname</b>	The argument for <b>\listname</b> is a string that is the name of this list. Names allow ListNum fields to specify the list they belong to. This is a destination control word.
<b>\liststyleidN</b>	This identifies the style of this list from the list style definition that has this ID as its <b>\listid</b> . There can be more than one list style reference to a list style definition. This keyword follows the same numbering convention as <b>\listid</b> .  <b>\liststyleidN</b> and <b>\liststylename</b> are exclusive; either zero or one of each can exist per list definition, but never both.
<b>\liststylename</b>	Identifies this list as a list style definition. This creates a new list style with the given name and the properties of the current list.  <b>\liststyleidN</b> and <b>\liststylename</b> are exclusive; either zero or one of each can exist per list definition, but never both.

While Word 97 emitted simple or multilevel (not simple) lists, Word 2000, Word 2002, and Word 2003 emit hybrid lists, which are essentially collections of simple lists. The main difference between Word 2000, Word 2002, and Word 2003 hybrid lists and Word 97 multilevel lists is that each level of a hybrid list has a unique identifier.

## List Levels

Each list consists of either one or nine list levels depending upon whether the **\listsimple** flag is set. Each list level contains a number of properties that specify the formatting for that level, such as the start-at value, the text string surrounding the number, its justification and indents, and so on.



Control word	Meaning
<code>\levelstartatN</code>	<i>N</i> specifies the start-at value for the level.
<code>\levelnfcN</code>	Specifies the number type for the level:
0	Arabic (1, 2, 3)
1	Uppercase Roman numeral (I, II, III)
2	Lowercase Roman numeral (i, ii, iii)
3	Uppercase letter (A, B, C)
4	Lowercase letter (a, b, c)
5	Ordinal number (1st, 2nd, 3rd)
6	Cardinal text number (One, Two Three)
7	Ordinal text number (First, Second, Third)
10	Kanji numbering without the digit character (*dbnum1)
11	Kanji numbering with the digit character (*dbnum2)
12	46 phonetic katakana characters in "aiueo" order (*aiueo)
13	46 phonetic katakana characters in "iroha" order (*iroha)
14	Double-byte character
15	Single-byte character
16	Kanji numbering 3 (*dbnum3)
17	Kanji numbering 4 (*dbnum4)
18	Circle numbering (*circlenum)
19	Double-byte Arabic numbering
20	46 phonetic double-byte katakana characters (*aiueo*dbchar)
21	46 phonetic double-byte katakana characters (*iroha*dbchar)
22	Arabic with leading zero (01, 02, 03, ..., 10, 11)
23	Bullet (no number at all)
24	Korean numbering 2 (*ganada)
25	Korean numbering 1 (*chosung)
26	Chinese numbering 1 (*gb1)
27	Chinese numbering 2 (*gb2)
28	Chinese numbering 3 (*gb3)
29	Chinese numbering 4 (*gb4)
30	Chinese Zodiac numbering 1 (* zodiac1)
31	Chinese Zodiac numbering 2 (* zodiac2)
32	Chinese Zodiac numbering 3 (* zodiac3)
33	Taiwanese double-byte numbering 1
34	Taiwanese double-byte numbering 2
35	Taiwanese double-byte numbering 3
36	Taiwanese double-byte numbering 4
37	Chinese double-byte numbering 1
38	Chinese double-byte numbering 2
39	Chinese double-byte numbering 3
40	Chinese double-byte numbering 4
41	Korean double-byte numbering 1
42	Korean double-byte numbering 2

Control word	Meaning
43	Korean double-byte numbering 3
44	Korean double-byte numbering 4
45	Hebrew non-standard decimal
46	Arabic Alif Ba Tah
47	Hebrew Biblical standard
48	Arabic Abjad style
255	No number

Control word	Meaning
<b>\leveljcN</b>	<p>0 Left justified</p> <p>1 Center justified</p> <p>2 Right justified</p>
<b>\levelnfcN</b>	<p>Same arguments as \levelnfc. Takes priority over \levelnfc if both are present. In Word 97 \levelnfc was interpreted differently by the Hebrew/Arabic versions. <b>\levelnfcN</b> in Word 2000, Word 2002, and Word 2003 eliminates dual interpretation, while <b>\levelnfc</b> is still needed for backward compatibility.</p>
<b>\leveljcnN</b>	<p>0 Left justified for left-to-right paragraphs and right justified for right-to-left paragraphs</p> <p>1 Center justified</p> <p>2 Right justified for left-to-right paragraphs and left justified for right-to-left paragraphs</p> <p>Word 2000, Word 2002, and Word 2003 prefer \leveljcnN over \leveljc if both are present, but it will be written for backward compatibility with older readers.</p>
<b>\leveloldN</b>	<p>1 if this level was converted from Word 6.0 or Word 7.0; 0 if it is a native Word 97 through Word 2003 level.</p>
<b>\levelprevN</b>	<p>1 if this level includes the text from the previous level (used for Word 7.0 compatibility only); otherwise, the value is 0. This keyword will only be valid if the \leveloldN keyword is emitted.</p>
<b>\levelprevspaceN</b>	<p>1 if this level includes the indentation from the previous level (used for Word 7.0 compatibility only); otherwise, the value is 0. This keyword will only be valid if the \leveloldN keyword is emitted.</p>
<b>\levelindentN</b>	<p>Minimum distance from the left indent to the start of the paragraph text (used for Word 7.0 compatibility only). This keyword will only be valid if the \leveloldN keyword is emitted.</p>
<b>\levelspaceN</b>	<p>Minimum distance from the right edge of the number to the start of the paragraph text (used for Word 7.0 compatibility only). This keyword will only be valid if the \leveloldN keyword is emitted.</p>
<b>\leveltext</b>	<p>If the list is hybrid, as indicated by \listhybrid, the \leveltemplateidN keyword will be included, whose argument is a unique level ID that should be randomly generated. The value N is a long integer. The level ID cannot be between (-1) and (-5).</p> <p>The second argument for this destination should be the number format string for this level. The first character is the length of the string, and any numbers within the level should be replaced by the index of the level they represent. For example, a level three number such as "1.1.1." would generate the following RTF: "<b>\leveltext \leveltemplateidN '06'00.'01.'02.}</b>" where the '06 is the string length, the '00, '01, and '02 are the level placeholders, and the periods are the surrounding text. This is a destination control word.</p>
<b>\levelnumbers</b>	<p>The argument for this destination should be a string that gives the offsets into the \leveltext of the level placeholders. In the preceding example, "1.1.1.", the \levelnumbers RTF should be</p> <p>{\levelnumbers '01'03'05}</p> <p>because the level placeholders have indices 1, 3, and 5. This is a destination control word.</p>
<b>\levelfollowN</b>	<p>Specifies which character follows the level text:</p> <p>0 Tab</p> <p>1 Space</p> <p>2 Nothing</p>
<b>\levellegalN</b>	<p>1 if any list numbers from previous levels should be converted to Arabic numbers; 0 if they should be left with the format specified by their own level's definition.</p>
<b>\levelnorestartN</b>	<p>1 if this level does not restart its count each time a super ordinate level is incremented; 0 if this level does restart its count each time a super ordinate level is incremented.</p>
<b>\levelpictureN</b>	<p>Determines which picture bullet from the \listpicture destination should be applied.</p>

In addition to all of these properties, each list level can contain any character properties (all of which affect all text for that level) and any combination of three paragraph properties: left indents, first line left indents, and tabs—each of which must be of a special type: **jclisttab**. These paragraph properties will be automatically applied to any paragraph in the list.

### List Override Table

The List Override table is a list of list overrides (destination **\listoverride**). Each list override contains the **listid** of one of the lists in the List table, as well as a list of any properties it chooses to override. Each paragraph will contain a list override index (keyword **ls**), which is a 1-based index into this table. Most list overrides don't override any properties—instead, they provide a level of indirection to a list. There are generally two types of list overrides:

- (1) Formatting overrides. Allows a paragraph to be part of a list and to be numbered along with the other members of the list, but have different formatting properties
- (2) Start-at overrides. Allows a paragraph to share the formatting properties of a list, but have different start-at values. The first element in the document with each list override index takes the start-at value that the list override specifies as its value, while each subsequent element is assigned the number succeeding the previous element of the list.

List overrides have a few top-level keywords, including a **\listoverridecount**, which contains a count of the number of levels whose format is overridden. This **\listoverridecount** should always be either 1 or 9, depending upon whether the list to be overridden is simple or hybrid/multilevel. All of the actual override information is stored within a list of list override levels (destination **\lfolevel**).

Control word	Meaning
<b>\listidN</b>	Should exactly match the <b>\listid</b> of one of the lists in the List table. The value <i>N</i> is a long integer.
<b>\listoverridecountN</b>	Number of list override levels within this list override (1 or 9).
<b>ls</b>	The (1-based) index of this <b>\listoverride</b> in the <b>\listoverride</b> table. This value should never be zero inside a <b>\listoverride</b> and must be unique for all <b>\listoverrides</b> within a document. The valid values are from 1 to 2000.

### List Override Level

Each list override level contains flags to specify whether the formatting or start-at values are being overridden for each level. If the format flag (**listoverrideformat**) is given, the **lfolevel** should also contain a list level (**listlevel**). If the start-at flag (**listoverridestartat**) is given, a start-at value must be provided. If the start-at is overridden but the format is not, then a **levelstartat** should be provided in the **lfolevel** itself. If both start-at and format are overridden, put the **levelstartat** inside the **listlevel** contained in the **lfolevel**.

Control word	Meaning
<b>\listoverridestartat</b>	Indicates an override of the start-at value.
<b>\listoverrideformatN</b>	Number of list override levels within this list override (should be either 1 or 9).

### Paragraph Group Properties

Word 2002 introduced paragraph group properties, similar to style sheets. A document using paragraph group properties places a **\pgptbl** entry in the header. Elements in the Paragraph Group Properties (PGP) table are entered as they are created in the document. In the program, the **\ipgpN** values are assigned random numbers, but for storage the numbers are converted to numbers in the integer range. Internally, this numbering system is left up to the developer. The formatting options are taken from the regular paragraph formatting options. PGP table entries may exist with different **\ipgpN** values but with the same properties. Any paragraph that references an entry in the PGP table does so by emitting **\ipgpN**, which sets paragraph formatting options according to the entry in the PGP table. Additional formatting options may also be employed.

The PGP syntax is as follows:

```
<pgptbl>      '{ \*\pgptbl <entry>+ '}'
<entry>       '{ \pgp<value> '}'
<value>       \ipgpN<parfmt>+
```

The following is a sample PGP table with two entries:

```
{\*\pgptbl {\pgp\ipgp13\itap0\li0\ri0\sb0\sa0}
{\pgp\ipgp80\itap0\li720\ri0\sb100\sa100}}
```

## Track Changes (Revision Marks)

This table allows tracking of multiple authors and reviewers of a document, and is used in conjunction with the character properties for tracking changes (using revision marks).

Control word	Meaning
\*\revtbl	<p>This group consists of subgroups that each identify the author of a revision in the document, as in {Author1;}. This is a destination control word.</p> <p>Revision conflicts, such as those that result when one author deletes another's additions, are stored as one group, in the following form:</p> <p>CurrentAuthor\00\&lt;length of previous author's name&gt;PreviousAuthor\00 PreviousRevisionTime</p> <p>The 4 bytes of the Date/Time (DTTM) structure are emitted as ASCII characters, so values greater than 127 should be emitted as hexadecimal values enclosed in quotation marks.</p>

All time references for revision marks use the following bit field structure, DTTM.

Bit numbers	Information	Range
0-5	Minute	0-59
6-10	Hour	0-23
11-15	Day of month	1-31
16-19	Month	1-12
20-28	Year	= Year - 1900
29-31	Day of week	0 (Sun)-6 (Sat)

## RSID

In Word 2002, a new style of revision tracking was established. RSIDs (Revision Save IDs) indicate when text or a property was changed. Whenever text is added or deleted or properties are changed, that text or property is tagged with the current "Save ID," which is a random number that changes each time the document is saved. They are primarily used when merging or comparing two documents with a common history but no revision marks. By looking at the RSID we can tell which of the two authors made the change. Without the RSID we can only tell that there is a difference, but we don't know if (for example) it was an addition by author A or a deletion by author B. An RSID table is placed after all other style definitions and before the <generator> and <info> groups.

The syntax for an RSID table is as follows:

```
<rsidtable>   '{ \*\rsidtbl <rsidlist>+ ';' }'
<rsidlist>    \rsidN
```

Control word	Meaning
\rsid <i>N</i>	Each time a document is saved a new entry is added to this table, with <b>N</b> being the random number assigned to represent the unique session.
\insrsid <i>N</i>	An RSID is inserted to denote the session in which particular text was inserted. Example: {\insrsid8282541 This is text.} For use in lists: {\insrsid8282541 Item in List \par{\listtext\pard\plain\f3\insrsid8282541 \loch\af3\dbch\af0 \hich\f3 \b7\tab}}
\rsidroot <i>N</i>	Designates the start of the document's history (first save).
\delrsid <i>N</i>	RSID value identifying when text was marked as deleted.
\charrsid <i>N</i>	RSID value identifying when character formatting was changed.
\sectrsid <i>N</i>	RSID identifying when section formatting was changed.
\pararsid <i>N</i>	RSID identifying when paragraph formatting was changed.
\tblrsid <i>N</i>	RSID identifying when table formatting was changed.

### Old Properties

With tracking enabled, changes to formatting can be documented. To keep track of the property before the changes were made, Old Properties were created. This tracking uses the following syntax:

<oldprop>	`{' \*\<oldproptype> <oldproperties>+ <trackinginfo> ';'}`
<oldproptype>	\oldcprops   \oldpprops   \oldtprops   \oldsprops
<oldproperties>	This section includes any of the relevant format tags that would have to be put in place to revert the document to its pre-edit form. For example, this would be "\b0" if the user had chosen to make the selection bold.
<trackinginfo>	This can be any tag used to track the author, revision ID, and date.

Control word	Meaning
\oldcprops	Old character formatting properties.
\oldpprops	Old paragraph formatting properties.
\oldtprops	Old table formatting properties.
\oldsprops	Old section formatting properties.

The following is an example of the correct use of the Old Properties when bold and italics are applied to a section of existing text. If the original text "This is a test." is changed to "This ***is a*** test." the following code snippet will be formed, which would tell an RTF reader that to undo the change to the character property bold and italic would have to be disabled:

```
{\rtlch\fcs1 \af0 \ltrch\fcs0 \insrsid2778197 \hich\af0\dbch\af13\loch\f0 This }
{\rtlch\fcs1 \ab\af0 \ltrch\fcs0
\b\i\crauth1\crdate1717000906\insrsid2778197\charrsid2778197 {\*\oldcprops
\b0\i0\crauth1\crdate1717000906\insrsid2778197\charrsid2778197 }\hich\af0\dbch\af13\
```

```
loch\fo is a){\rtlch\fcs1 \af0 \ltrch\fcs0 \insrsid2778197
\hich\af0\dbch\af13\loch\fo test.){\rtlch\fcs1 \af0 \ltrch\fcs0 \insrsid15803535
```

## User Protection Information

The following is the syntax for the user protection information group, which lists the specific users granted exceptions to the document protection.

```
<userprotection>    '{ \*\protusertbl <user>+ }'
<user>              '{ #PCDATA }'
                    A user name is enclosed by braces.
```

Control word	Meaning
--------------	---------

\protusertbl	Table of users referenced during document protection.
--------------	---

Example of user protection information:

```
{\*\protusertbl{DOMAIN\'5userone}{DOMAIN\'5cuserstwo}{DOMAIN\'5cuserthree}}
```

## Generator

Word 2002 and Word 2003 allow the RTF emitter application to stamp the document with its name, version, and build number. The generator area has the following syntax:

```
<generator>        '{ \*\generator <name> ;' }'
<name>              #PCDATA, the name of the program, the version, the build, and any other information about
                    the emitting program can be listed here. Word 2002 lists {\*\generator Microsoft Word
                    10.0.XXXX} – Word 2003 lists {\*\generator Microsoft Word 11.0.XXXX} in which XXXX is
                    replaced by the build number. Only ASCII text is allowed in this field.
```

## Document Area

Once the RTF header is defined, the RTF reader has enough information to correctly read the actual document text. The document area has the following syntax:

```
<document>          <info>? <docfmt>* <section>+
```

## Information Group

The **\info** control word introduces the information group, which contains information about the document. This can include the title, author, keywords, comments, and other information specific to the file. This information is for use by a document-management utility, if available.

The information group has the following syntax:

<info>	'{' \info <title>? & <subject>? & <author>? & <manager>? & <company>? <operator>? & <category>? & <keywords>? & <comment>? & \version? & <doccomm>? & \vern? & <creatim>? & <revtim>? & <printim>? & <buptim>? & \edmins? & \nofpages? & \nofwords? \nofchars? & \id? '}'
<title>	'{' \title #PCDATA '}'
<subject>	'{' \subject #PCDATA '}'
<author>	'{' \author #PCDATA '}'
<manager>	{' \manager #PCDATA '}'
<company>	{' \company #PCDATA '}'
<operator>	'{' \operator #PCDATA '}'
<category>	{' \category #PCDATA '}'
<keywords>	'{' \keywords #PCDATA '}'
<comment>	'{' \comment #PCDATA '}'
<doccomm>	'{' \doccomm #PCDATA '}'
<hlinkbase>	'{' \hlinkbase #PCDATA '}'
<creatim>	'{' \creatim <time> '}'
<revtim>	'{' \revtim <time> '}'
<printim>	'{' \printim <time> '}'
<buptim>	'{' \buptim <time> '}'
<time>	\yr? \mo? \dy? \hr? \min? \sec?

Some applications, such as Word, ask the user to type this information when saving the document in its native format. If the document is then saved as an RTF file or translated into RTF, the RTF writer specifies this information using control words in the following table. These control words are destinations, and both the control words and the text should be enclosed in braces ({ }).

Control word	Meaning
\title	Title of the document. This is a destination control word.
\subject	Subject of the document. This is a destination control word.
\author	Author of the document. This is a destination control word.
\manager	Manager of the author. This is a destination control word.
\company	Company of the author. This is a destination control word.
\operator	Person who last made changes to the document. This is a destination control word.
\category	Category of the document. This is a destination control word.
\keywords	Selected keywords for the document. This is a destination control word.
\comment	Comments; text is ignored. This is a destination control word.
\versionN	Version number of the document.
\doccomm	Comments displayed in the <b>Summary Info</b> or <b>Properties</b> dialog box in Word. This is a destination control word.
\hlinkbase	The base address that is used for the path of all relative hyperlinks inserted in the document. This can be a path or an Internet address (URL).

The \userprops control word introduces the user-defined document properties. Unique \propname control words define each user-defined property in the document. This group has the following syntax:



<userprops>	`{\*` \userprops ({' <propinfo> `}*') `}'`
<propinfo>	<propname> <proptype> <staticval> <linkval>?
<propname>	`{' \propname #PCDATA `}'`
<proptype>	\proptype
<staticval>	\staticval
<linkval>	\linkval

Control word	Meaning
\propname	The name of the user-defined property.
\staticval	The value of the property.
\linkval	The name of a bookmark that contains the text to display as the value of the property.
\proptype <i>N</i>	Specifies the type of the property: <ul style="list-style-type: none"> <li>3 Integer</li> <li>5 Real number</li> <li>7 Date</li> <li>11 Boolean</li> <li>30 Text</li> </ul>

The RTF writer may automatically enter other control words, including those in the following table.

Control word	Meaning
\vern <i>N</i>	Internal version number
\creatim	Creation time
\revtim	Revision time
\printim	Last print time
\buptim	Backup time
\edmins <i>N</i>	Total editing time (in minutes)
\yr <i>N</i>	Year
\mo <i>N</i>	Month
\dy <i>N</i>	Day
\hr <i>N</i>	Hour
\min <i>N</i>	Minute
\sec <i>N</i>	Seconds
\nofpages <i>N</i>	Number of pages
\nofwords <i>N</i>	Number of words
\nofchars <i>N</i>	Number of characters including spaces
\nofcharsws <i>N</i>	Number of characters not including spaces
\id <i>N</i>	Internal ID number

Any control word described in the previous table that does not have a numeric parameter specifies a date; all dates are specified with the **\yr \mo \dy \hr \min \sec** controls. An example of an information group follows:

```
{\info{\title Template}{\author John Doe}{\operatorator JOHN DOE}
{\creatim\yr1999\mo4\dy27\min1}{\revtim\yr1999\mo4\dy27\min1}
```

```
{\printim\yr1999\mo3\dy17\hr23\min5}{\version2}{\edmins2}{\nofpages183}  
{\nofwords53170}{\nofchars303071}{\*\company Microsoft}{\nofcharsws372192}  
{\vern8247}}
```

## Document Formatting Properties

After the information group (if there is one), there may be some document formatting control words (described as <docfmt> in the document area syntax description). These control words specify the attributes of the document, such as margins and footnote placement. These attributes must precede the first plain-text character in the document.

The control words that specify document formatting are listed in the following table (measurements are in twips; a twip is one-twentieth of a point). For omitted control words, RTF uses the default values.

Note that three of the document-protection control words (**\formprot**, **\revprot**, and **\annotprot**) are mutually exclusive; only one of the three can apply to any given document. On the other hand, **\readprot** indicates that the document is set to Read-Only protection, but allows exceptions, and can appear with **\annotprot** control words for backward compatibility.

Also, there is currently no method for storing passwords in RTF, so any document that associates a password with a protection level will lose the password protection in RTF.

For more information about bidirectional controls, see [Bidirectional Language Support](#) in this specification.

Control word	Meaning
\deftab <i>N</i>	Default tab width in twips (the default is 720).
\hyphhotz <i>N</i>	Hyphenation hot zone in twips (the amount of space at the right margin in which words are hyphenated).
\hyphconsec <i>N</i>	<b>N</b> is the maximum number of consecutive lines that are allowed to end in a hyphen. 0 means no limit.
\hyphcaps	Toggles hyphenation of capitalized words (the default is on). Append 1 or leave control word by itself to toggle property on; append 0 to turn it off.
\hyphauto	<b>Toggles automatic hyphenation (the default is off). Append 1 or leave control word by itself to toggle property on; append 0 to turn it off.</b>
\linestart <i>N</i>	Beginning line number (the default is 1).
\fracwidth	Uses fractional character widths when printing (QuickDraw only).
\*\nextfile	The argument is the name of the next file to print or index; it must be enclosed in braces. This is a destination control word.
\*\template	The argument is the name of a related template file; it must be enclosed in braces. This is a destination control word.
\makebackup	Backup copy is made automatically when the document is saved.
\defformat	Tells the RTF reader that the document should be saved in RTF format.
\psover	Prints PostScript over the text.
\doctemp	Document is a boilerplate document. For Word for Windows, this is a template; for Word for the Macintosh, this is a stationery file.
\deflang <i>N</i>	Defines the default language used in the document used with a <b>\plain</b> control word. See the section on <a href="#">Font/Character Formatting Properties</a> in this Specification for a list of possible values for <b>N</b> .
\deflangfe <i>N</i>	Default language ID for Asian/Middle Eastern text in Word.
\windowcaption	Sets the caption text for the document window. This is a string value.
\doctype <i>N</i>	An integer (0–2) that describes the document type for AutoFormat. 0        General document (for formatting most documents, the default) 1        Letter (for formatting letters, and used by Letter Wizard) 2        E-mail (for formatting e-mail, and used by WordMail)
\fromtext	Indicates document was originally plain text.
\fromhtml	Indicates the document was originally HTML and may contain encapsulated HTML tags. This keyword may be followed by a version number (currently 1).
\horzdoc	Horizontal rendering.
\vertdoc	Vertical rendering.
\jcompress	Compressing justification (default).
\jexpand	Expanding justification.
\lnongrid	Define line based on the grid.

#### Document Views and Zoom Level

\viewkind <i>N</i>	An integer (0 through 5) that represents the view mode of the document. 0        None 1        Page Layout view 2        Outline view 3        Master Document view 5        Online Layout view
\viewscale <i>N</i>	Zoom level of the document; the <b>N</b> argument is a value representing a percentage (the default is 100).

Control word	Meaning
\viewzk <i>N</i>	An integer (0 through 2) that represents the zoom kind of the document. 0        None 1        Full page 2        Best fit
\private	Obsolete destination. It has no leading \*. It should be skipped.
\viewbksp <i>N</i>	Boolean: 0        Background shapes will not in Page Layout View (default if omitted). 1        Background shapes will show in Page Layout View.

### Footnotes and Endnotes

\fet <i>N</i>	Footnote/endnote type. This indicates what type of notes are present in the document. 0        Footnotes only or nothing at all (the default) 1        Endnotes only 2        Both footnotes and endnotes For backward compatibility, if \fet1 is emitted, \endnotes or \enddoc will be emitted along with \aendnotes or \aenddoc. RTF readers that understand \fet will need to ignore the footnote-positioning control words and use the endnote control words instead.
\ftnsep	Text argument separates footnotes from the document. This is a destination control word.
\ftnsepc	Text argument separates continued footnotes from the document. This is a destination control word.
\ftncn	Text argument is a notice for continued footnotes. This is a destination control word.
\aftnsep	Text argument separates endnotes from the document. This is a destination control word.
\aftnsepc	Text argument separates continued endnotes from the document. This is a destination control word.
\aftncn	Text argument is a notice for continued endnotes. This is a destination control word.
\endnotes	Footnotes at the end of the section (the default).
\enddoc	Footnotes at the end of the document.
\ftntj	Footnotes beneath text (top justified).
\ftnbj	Footnotes at the bottom of the page (bottom justified).
\aendnotes	Endnotes at end of section (the default).
\aenddoc	Endnotes at end of document.
\aftnbj	Endnotes at bottom of page (bottom justified).
\aftntj	Endnotes beneath text (top justified).
\ftnstart <i>N</i>	Beginning footnote number (the default is 1).
\aftnstart <i>N</i>	Beginning endnote number (the default is 1).
\ftnrstpg	Restart footnote numbering each page.
\ftnrestart	Footnote numbers restart at each section. Microsoft Word for the Macintosh uses this control to restart footnote numbering at each page.
\ftnrstcont	Continuous footnote numbering (the default).
\aftnrestart	Restart endnote numbering each section.
\aftnrstcont	Continuous endnote numbering (the default).
\ftnnar	Footnote numbering—Arabic numbering (1, 2, 3, ...).
\ftnnalc	Footnote numbering—Alphabetic lowercase (a, b, c, ...).
\ftnnauc	Footnote numbering—Alphabetic uppercase (A, B, C, ...).
\ftnnrlc	Footnote numbering—Roman lowercase (i, ii, iii, ...).

Control word	Meaning
\ftnnruc	Footnote numbering—Roman uppercase (I, II, III, ...).
\ftnnchi	Footnote numbering—Chicago Manual of Style (*, †, ‡, §).
\ftnnchosung	Footnote Korean numbering 1 (*chosung).
\ftnncnum	Footnote Circle numbering (*circlenum).
\ftnndbnum	Footnote kanji numbering without the digit character (*dbnum1).
\ftnndbnumd	Footnote kanji numbering with the digit character (*dbnum2).
\ftnndbnumt	Footnote kanji numbering 3 (*dbnum3).
\ftnndbnumk	Footnote kanji numbering 4 (*dbnum4).
\ftnndbar	Footnote double-byte numbering (*dbchar).
\ftnnganada	Footnote Korean numbering 2 (*ganada).
\ftnngbnum	Footnote Chinese numbering 1 (*gb1).
\ftnngbnumd	Footnote Chinese numbering 2 (*gb2).
\ftnngbnuml	Footnote Chinese numbering 3 (*gb3).
\ftnngbnumk	Footnote Chinese numbering 4 (*gb4).
\ftnnzodiac	Footnote numbering—Chinese Zodiac numbering 1 (* zodiac1). 甲、乙、丙… <del>甲、乙、丙…</del>
\ftnnzodiacd	Footnote numbering—Chinese Zodiac numbering 2 (* zodiac2). 子、丑、寅…
\ftnnzodiacl	Footnote numbering—Chinese Zodiac numbering 3 (* zodiac3).
\aftnnar	Endnote numbering—Arabic numbering (1, 2, 3, ...).
\aftnnalc	Endnote numbering—Alphabetic lowercase (a, b, c, ...).
\aftnnauc	Endnote numbering—Alphabetic uppercase (A, B, C, ...).
\aftnnrlc	Endnote numbering—Roman lowercase (i, ii, iii, ...).
\aftnnruc	Endnote numbering—Roman uppercase (I, II, III, ...).
\aftnnchi	Endnote numbering—Chicago Manual of Style (*, †, ‡, §).
\aftnnchosung	Endnote Korean numbering 1 (*chosung).
\aftnncnum	Endnote Circle numbering (*circlenum).
\aftnndbnum	Endnote kanji numbering without the digit character (*dbnum1).
\aftnndbnumd	Endnote kanji numbering with the digit character (*dbnum2).
\aftnndbnumt	Endnote kanji numbering 3 (*dbnum3).
\aftnndbnumk	Endnote kanji numbering 4 (*dbnum4).
\aftnndbar	Endnote double-byte numbering (*dbchar).
\aftnnganada	Endnote Korean numbering 2 (*ganada).
\aftnngbnum	Endnote Chinese numbering 1 (*gb1).
\aftnngbnumd	Endnote Chinese numbering 2 (*gb2).
\aftnngbnuml	Endnote Chinese numbering 3 (*gb3).
\aftnngbnumk	Endnote Chinese numbering 4 (*gb4).
\aftnnzodiac	Endnote numbering—Chinese Zodiac numbering 1 (* zodiac1). 甲、乙、丙…
\aftnnzodiacd	Endnote numbering—Chinese Zodiac numbering 2 (* zodiac2). 子、丑、寅…
\aftnnzodiacl	Endnote numbering—Chinese Zodiac numbering 3 (* zodiac3).
Page Information	
\paperwN	Paper width in twips (the default is 12,240).
\paperhN	Paper height in twips (the default is 15,840).

Control word	Meaning
\pszN	Used to differentiate between paper sizes with identical dimensions in Microsoft Windows NT®. Values 1 through 41 correspond to paper sizes defined in DRVINI.H in the Windows 3.1 SDK (DMPAPER_ values). Values greater than or equal to 42 correspond to user-defined forms in Windows NT.
\marglN	Left margin in twips (the default is 1800).
\margrN	Right margin in twips (the default is 1800).
\margtN	Top margin in twips (the default is 1440).
\margbN	Bottom margin in twips (the default is 1440).
\facingp	Facing pages (activates odd/even headers and gutters).
\gutterN	Gutter width in twips (the default is 0).
\rtlGutter	Gutter is positioned on the right.
\gutterprl	Parallel gutter.
\margmirror	Switches margin definitions on left and right pages. Used in conjunction with \facingp.
\landscape	Landscape format.
\pgnstartN	Beginning page number (the default is 1).
\widowctrl	Enable widow and orphan control.
\twoonone	Print two logical pages on one physical page.
\bookfold	Book fold printing. Allows for printing documents that can easily be made into pamphlets. This will print two pages side by side in landscape mode, and will print to the back of the sheet if the printer supports duplex printing.
\bookfoldrev	Reverse book fold printing for bidirectional languages.
\bookfoldsheetsN	Sheets per booklet; this should be a multiple of four.
Linked Styles	
\linkstyles	Update document styles automatically based on template.
Compatibility Options	
\notabind	Don't add automatic tab stop for hanging indent.
\wraptrsp	Wrap trailing spaces onto the next line.
\prcolbl	Print all colors as black.
\noextrasprl	Don't add extra space to line height for showing raised/lowered characters.
\nocolbal	Don't balance columns.
\cvmme	Treat old-style escaped quotation marks (\") as current style (") in mail merge data documents.
\sprstsp	Suppress extra line spacing at top of page. Basically, this means to ignore any line spacing larger than Auto at the top of a page.
\sprsspbf	Suppress space before paragraph property after hard page or column break.
\otblrul	Combine table borders as done in Word 5.x for the Macintosh. Contradictory table border information is resolved in favor of the first cell.
\transmf	Metafiles are considered transparent; don't blank the area behind metafiles.
\swpbdr	If a paragraph has a left border (not a box) and the <b>Different Odd And Even</b> or <b>Mirror Margins</b> check box is selected, Word will print the border on the right for odd-numbered pages.
\brkfrm	Show hard (manual) page breaks and column breaks in frames.
\sprslnsp	Suppress extra line spacing like WordPerfect version 5.x.
\subfontbysize	Substitute fonts based on size first.
\truncatefontheight	Round down to the nearest font size instead of rounding up.
\truncex	Don't add leading (extra space) between rows of text.

Control word	Meaning
\bdbfhdr	Print body before header/footer. Option for compatibility with Word 5.x for the Macintosh.
\dntblnsbdb	Don't balance SBCS/DBCS characters. Option for compatibility with Word 6.0 (Japanese).
\expshtrn	Expand character spaces on line-ending with SHIFT+RETURN. Option for compatibility with Word 6.0 (Japanese).
\lytexcttp	Don't center exact line height lines.
\lytptrmet	Use printer metrics to lay out document.
\msmcap	Small caps like Word 5.x for the Macintosh.
\nolead	No external leading. Option for compatibility with Word 5.x for the Macintosh.
\nospaceforul	Don't add space for underline. Option for compatibility with Word 6.0 (Japanese).
\noultrlspc	Don't underline trailing spaces. Option for compatibility with Word 6.0 (Japanese).
\noxlattoyen	Don't translate backslash to Yen sign. Option for compatibility with Word 6.0 (Japanese).
\oldlinewrap	Lines wrap like Word 6.0.
\sprsbsp	Suppress extra line spacing at bottom of page.
\sprstsm	Does nothing. This keyword should be ignored.
\wpjst	Do full justification like WordPerfect 6.x for Windows.
\wpsp	Set the width of a space like WordPerfect 5.x.
\wptab	Advance to next tab stop like WordPerfect 6.x.
\splytwnine	Don't lay out AutoShapes like Word 97.
\ftnlytwnine	Don't lay out footnotes like Word 6.0, Word 95, and Word 97.
\htmautsp	Use HTML paragraph auto spacing.
\useltbaln	Don't forget last tab alignment.
\alntblind	Don't align table rows independently.
\lytcalctblwd	Don't lay out tables with raw width.
\lyttblrtgr	Don't allow table rows to lay out apart.
\oldas	Use Word 95 Auto spacing.
\lnbrkrule	Don't use Word 97 line breaking rules for Asian text.
\bdrslwsix	Use Word 6.0/Word 95 borders rules.
\nolnhtadjtbl	Don't adjust line height in table.
\ApplyBrkRules	Use line breaking rules compatible with Thai text.
\rempersonalinfo	This will indicate to the emitting program to remove personal information such as the author's name as a document property or in a comment.
\snapgridtocell	Snap text to grid inside table with inline objects.
\wrppunct	Allow hanging punctuation in character grid.
\asianbrkrule	Use Asian rules for line breaks with character grid.
\nobrkwrtbl	Don't break wrapped tables across pages.
\toplinepunct	Turns on a check box in the <b>Paragraph Formatting</b> dialogue box with a setting to allow punctuation at the start of the line to compress.
\viewnobound	Hide white space between pages.
\donotshowmarkup	Don't show markup while reviewing.
\donotshowcomments	Don't show comments while reviewing.
\donotshowinsdel	Don't show insertions and deletions while reviewing.
\donotshowprops	Don't show formatting while reviewing.
\allowfieldendsel	Enables selecting the entire field with the first or last character.
\nocompatoptions	Specifies that all compatibility options should be set to default.

Control word	Meaning
\nogrowautofit	Don't allow tables set to "autofit to contents" to extend into the margins when in Print Layout. This is the new default behavior for Word 2003, which keeps tables within the margins.
\newtblstyrls	Use the new Word 2003 table style rules. Applies the top border of a column in a more intuitive place when there is a header row in the table. Word 2002 places the top border of a column under the heading row, rather than above it as Word 2003 does.  This new behavior also fixes an issue with shading not displaying correctly for cells using conditional formatting.

#### Forms

\formprot	This document is protected for forms.
\allprot	This document has no unprotected areas.
\formshade	This document has form field shading on.
\formdisp	This document currently has a forms drop-down box or check box selected.
\printdata	This document has print form data only on.

#### Revision Marks

\revprot	This document is protected for revisions. The user can edit the document, but revision marking cannot be disabled.
\revisions	Turns on revision marking.
\revprop/V	Argument indicates how revised text will be displayed: 0 No properties shown 1 Bold 2 Italic 3 Underline (default) 4 Double underline
\revbar/V	Vertical lines mark altered text, based on the argument: 0 No marking 1 Left margin 2 Right margin 3 Outside (the default: left on left pages, right on right pages)

#### Write Protection (Read Only)

\readprot	This document is protected for editing, except in areas marked as exceptions by <b>\protstart</b> and <b>\protend</b> . This was introduced in Word 2003 and <b>\annotprot</b> is emitted with it for backward compatibility.
-----------	---

#### Comment Protection (Annotations)

\annotprot	This document is protected for comments (annotations). The user cannot edit the document but can insert comments (annotations).
------------	---

#### Style and Formatting Protection

\stylelock	The document contains styles and formatting restrictions.
\stylelockenforced	The styles and formatting restrictions are being enforced.
\stylelockbackcomp	Style lockdown backward compatibility flag, indicating we emitted protection keywords to get documents with styles and formatting restrictions to behave in a reasonable way when opened by older versions.
\autofmtoverride	Allow AutoFormat to override styles and formatting restrictions. When style protection is on, the user cannot add direct formatting. This setting allows AutoFormat actions to apply direct formatting when needed.

#### Style and Formatting Protection



Control word	Meaning
\enforceprot $N$	Enforce protection. Assumes that a protection was specified (\annotprot, \readprot, \formprot, \revprot)
\protlevel $N$	Level of protection
	0      Track Changes (\revprot is also emitted)
	1      Comments (\annotprot also emitted)
	2      Forms (\formprot also emitted)
	3      Read Only (\readprot also emitted)

## Tables

\tsd $N$	Sets the default table style for this document. $N$ references an entry in the table styles list.
----------	---

## Bidirectional Controls

\rtldoc	This document will be formatted to have Arabic-style pagination.
\ltrdoc	This document will have English-style pagination (the default).

## Click-and-Type

\cts $N$	Index to the style to be used for Click-and-Type (0 is the default).
----------	--

## Kinsoku Characters (Far East)

\jsku	Indicates that the strict Kinsoku set must be used for Japanese; \jsku should not be present if \ksulang $N$ is present <i>and</i> the language $N$ is Japanese.
\ksulang $N$	$N$ indicates which language the customized Kinsoku characters defined in the \fchars and \lchars destinations belong to.
\*\fchars	List of following Kinsoku characters.
\*\lchars	List of leading Kinsoku characters.
\noj kernpunct	Kerning for Latin text only, as opposed to Latin text and punctuations (Asian Typography option).

## Drawing Grid

\dghspace $N$	Drawing grid horizontal spacing in twips (the default is 120).
\dgvspace $N$	Drawing grid vertical spacing in twips (the default is 120).
\dghorigin $N$	Drawing grid horizontal origin in twips (the default is 1701).
\dgvorigin $N$	Drawing grid vertical origin in twips (the default is 1984).
\dghshow $N$	Show $N$ th horizontal gridline (the default is 3).
\dgvshow $N$	Show $N$ th vertical gridline (the default is 0).
\dgsnap	Snap to drawing grid.
\dgmarg in	Drawing grid to follow margins.

---

<b>Page Borders</b>		
\pgbrdrhead		Page border surrounds header.
\pgbrdrfoot		Page border surrounds footer.
\pgbrdrt		Page border top.
\pgbrdrb		Page border bottom.
\pgbrdrl		Page border left.
\pgbrdrr		Page border right.
\brdrartN		Page border art; the <b>N</b> argument is a value from 1 to 165 representing the number of the border.
\pgbrdroptN	8	Page border measure from text. <b>Always display in front</b> option is set to <b>off</b> .
	32	Page border measure from edge of page. <b>Always display in front</b> option is set to <b>on</b> .
	40	Page border measure from edge of page. <b>Always display in front</b> option is set to <b>off</b> .
\pgbrdrsnap		Align paragraph borders and table edges with page border.

The color, width, border style, and border spacing keywords for page borders are the same as the keywords defined for paragraph borders.

### Section Text

Each section in the RTF file has the following syntax:

```
<section>          <secfmt>* <hdrftr>? <para>+ (\sect <section>)?
```

### Section Formatting Properties

At the beginning of each section, there may be section-formatting control words (described as <secfmt> in the section text syntax description). These control words specify section-formatting properties, which apply to the text *following* the control word, with the exception of the section-break control words (those beginning with \sbk). Section-break control words describe the break *preceding* the text. These control words can appear anywhere in the section, not just at the start.

Note that if the \sectd control word is not present, the current section inherits all section properties defined in the previous section.

The section-formatting control words are listed in the following table.

Control word	Meaning
\sect	New section.
\sectd	Reset to default section properties.
\endnhere	Endnotes included in the section.
\binfsxnN	<b>N</b> is the printer bin used for the first page of the section. If this control is not defined, then the first page uses the same printer bin as defined by the <b>\binsxnN</b> control.
\binsxnN	<b>N</b> is the printer bin used for the pages of the section.
\dsN	Designates section style. If a section style is specified, style properties must be specified with the section.
\pnseclvN	Used for multilevel lists. This property sets the default numbering style for each corresponding <b>\pnlvlN</b> control word (bullets and numbering property for paragraphs) within that section. This is a destination control word.
\sectunlocked	This section is unlocked for forms.

### Section Break

\sbknone	No section break.
\sbkcol	Section break starts a new column.
\sbkpage	Section break starts a new page (the default).
\sbkeven	Section break starts at an even page.
\sbkodd	Section break starts at an odd page.

### Columns

\colsN	Number of columns for "snaking" (the default is 1).
\colsxN	Space between columns in twips (the default is 720).
\colnoN	Column number to be formatted; used to specify formatting for variable-width columns.
\colsrN	Space to right of column in twips; used to specify formatting for variable-width columns.
\colwN	Width of column in twips; used to override the default constant width setting for variable-width columns.
\linebetcol	Line between columns.

### Footnotes and Endnotes

\sftntj	Footnotes beneath text (top justified).
\sftnbj	Footnotes at the bottom of the page (bottom justified).
\sftnstartN	Beginning footnote number (the default is 1).
\saftnstartN	Beginning endnote number (the default is 1).
\sftnrstpg	Restart footnote numbering each page.
\sftnrestart	Footnote numbers restart at each section. Microsoft Word for the Macintosh uses this control to restart footnote numbering at each page.
\sftnrstcont	Continuous footnote numbering (the default).
\saftnrestart	Restart endnote numbering each section.
\saftnrstcont	Continuous endnote numbering (the default).
\sftnnar	Footnote numbering—Arabic numbering (1, 2, 3, ...).
\sftnnalc	Footnote numbering—Alphabetic lowercase (a, b, c, ...).
\sftnnauc	Footnote numbering—Alphabetic uppercase (A, B, C, ...).
\sftnnrlc	Footnote numbering—Roman lowercase (i, ii, iii, ...).
\sftnnruc	Footnote numbering—Roman uppercase (I, II, III, ...).
\sftnnchi	Footnote numbering—Chicago Manual of Style (*, †, ‡, §).
\sftnnchosung	Footnote Korean numbering 1 (*chosung).

Control word	Meaning
\sftnncnum	Footnote Circle numbering (*circlenum).
\sftnndbnum	Footnote kanji numbering without the digit character (*dbnum1).
\sftnndbnumd	Footnote kanji numbering with the digit character (*dbnum2).
\sftnndbnumt	Footnote kanji numbering 3 (*dbnum3).
\sftnndbnumk	Footnote kanji numbering 4 (*dbnum4).
\sftnndbar	Footnote double-byte numbering (*dbchar).
\sftnnganada	Footnote Korean numbering 2 (*ganada).
\sftnngbnum	Footnote Chinese numbering 1 (*gb1).
\sftnngbnumd	Footnote Chinese numbering 2 (*gb2).
\sftnngbnuml	Footnote Chinese numbering 3 (*gb3).
\sftnngbnumk	Footnote Chinese numbering 4 (*gb4).
\sftnnzodiac	Footnote numbering—Chinese Zodiac numbering 1 (* zodiac1). 甲、乙、丙… <del>甲、乙、丙…</del>
\sftnnzodiacd	Footnote numbering—Chinese Zodiac numbering 2 (* zodiac2). 子、丑、寅…
\sftnnzodiacl	Footnote numbering—Chinese Zodiac numbering 3 (* zodiac3).
\saftnnar	Endnote numbering—Arabic numbering (1, 2, 3, ...).
\saftnnalc	Endnote numbering—Alphabetic lowercase (a, b, c, ...).
\saftnnauc	Endnote numbering—Alphabetic uppercase (A, B, C, ...).
\saftnnrlc	Endnote numbering—Roman lowercase (i, ii, iii, ...).
\saftnnruc	Endnote numbering—Roman uppercase (I, II, III, ...).
\saftnnchi	Endnote numbering—Chicago Manual of Style (*, †, ‡, §).
\saftnnchosung	Endnote Korean numbering 1 (*chosung).
\saftnncnum	Endnote Circle numbering (*circlenum).
\saftnndbnum	Endnote kanji numbering without the digit character (*dbnum1).
\saftnndbnumd	Endnote kanji numbering with the digit character (*dbnum2).
\saftnndbnumt	Endnote kanji numbering 3 (*dbnum3).
\saftnndbnumk	Endnote kanji numbering 4 (*dbnum4).
\saftnndbar	Endnote double-byte numbering (*dbchar).
\saftnnganada	Endnote Korean numbering 2 (*ganada).
\saftnngbnum	Endnote Chinese numbering 1 (*gb1).
\saftnngbnumd	Endnote Chinese numbering 2 (*gb2).
\saftnngbnuml	Endnote Chinese numbering 3 (*gb3).
\saftnngbnumk	Endnote Chinese numbering 4 (*gb4).
\saftnnzodiac	Endnote numbering—Chinese Zodiac numbering 1 (* zodiac1). 甲、乙、丙…
\saftnnzodiacd	Endnote numbering—Chinese Zodiac numbering 2 (* zodiac2). 子、丑、寅…
\saftnnzodiacl	Endnote numbering—Chinese Zodiac numbering 3 (* zodiac3).

### Line Numbering

\linemod <i>N</i>	Line-number modulus amount to increase each line number (the default is 1).
\linex <i>N</i>	Distance from the line number to the left text margin in twips (the default is 360). The automatic distance is 0.
\linestarts <i>N</i>	Beginning line number (the default is 1).
\linerestart	Line numbers restart at <b>\linestarts</b> value.
\lineppage	Line numbers restart on each page.

Control word	Meaning
\linecont	Line numbers continue from the preceding section.
<b>Page Information</b>	
\pgwsxn <i>N</i>	<b>N</b> is the page width in twips. A <b>\sectd</b> resets the value to that specified by <b>\paperw<i>N</i></b> in the document properties.
\pghsxn <i>N</i>	<b>N</b> is the page height in twips. A <b>\sectd</b> resets the value to that specified by <b>\paperh<i>N</i></b> in the document properties.
\marglsxn <i>N</i>	<b>N</b> is the left margin of the page in twips. A <b>\sectd</b> resets the value to that specified by <b>\margl<i>N</i></b> in the document properties.
\margrsxn <i>N</i>	<b>N</b> is the right margin of the page in twips. A <b>\sectd</b> resets the value to that specified by <b>\margr<i>N</i></b> in the document properties.
\margtsxn <i>N</i>	<b>N</b> is the top margin of the page in twips. A <b>\sectd</b> resets the value to that specified by <b>\margt<i>N</i></b> in the document properties.
\margbsxn <i>N</i>	<b>N</b> is the bottom margin of the page in twips. A <b>\sectd</b> resets the value to that specified by <b>\margb<i>N</i></b> in the document properties.
\guttersxn <i>N</i>	<b>N</b> is the width of the gutter margin for the section in twips. A <b>\sectd</b> resets the value to that specified by <b>\gutter<i>N</i></b> from the document properties. If <b>Facing Pages</b> is turned <b>off</b> , the gutter is added to the left margin of all pages. If <b>Facing Pages</b> is turned <b>on</b> , the gutter is added to the left side of odd-numbered pages and the right side of even-numbered pages.
\margmirsxn	Switches margin definitions on left and right pages. Used in conjunction with <b>\facingp</b> .
\Indscpsxn	Page orientation is in landscape format. To mix portrait and landscape sections within a document, the <b>\landscape</b> control should not be used so that the default for a section is portrait, which may be overridden by the <b>\Indscpsxn</b> control.
\titlepg	First page has a special format.
\headery <i>N</i>	Header is <b>N</b> twips from the top of the page (the default is 720).
\footery <i>N</i>	Footer is <b>N</b> twips from the bottom of the page (the default is 720).
<b>Page Numbers</b>	
\pgnstarts <i>N</i>	Beginning page number (the default is 1).
\pgncont	Continuous page numbering (the default).
\pgnrestart	Page numbers restart at <b>\pgnstarts</b> value.
\pgnx <i>N</i>	Page number is <b>N</b> twips from the right margin (the default is 720). This control word is understood but not used by current versions (6.0 or later) of Word.
\pgny <i>N</i>	Page number is <b>N</b> twips from the top margin (the default is 720). This control word is understood but not used by current versions (6.0 or later) of Word.
\pgndec	Page-number format is decimal.
\pgnucrm	Page-number format is uppercase Roman numeral.
\pgnlcrm	Page-number format is lowercase Roman numeral.
\pgnucltr	Page-number format is uppercase letter.
\pgnldtr	Page-number format is lowercase letter.
\pgnbidia	Page-number format is Abjad Jawaz if language is Arabic and Biblical Standard if language is Hebrew.
\pgnbidib	Page-number format is Alif Ba Tah if language is Arabic and Non-standard Decimal if language is Hebrew.
<b>\pgnchosung</b>	Korean numbering 1 (* chosung).
<b>\pgncnum</b>	Circle numbering (*circenum).
<b>\pgndbnum</b>	Kanji numbering without the digit character.
<b>\pgndbnumd</b>	Kanji numbering with the digit character.
<b>\pgndbnumt</b>	Kanji numbering 3 (*dbnum3).

Control word	Meaning
<b>\pgndbnumk</b>	Kanji numbering 4 (*dbnum4).
<b>\pgndecd</b>	Double-byte decimal numbering.
<b>\pgnganada</b>	Korean numbering 2 (*ganada).
<b>\pgngbnum</b>	Chinese numbering 1 (*gb1).
<b>\pgngbnumd</b>	Chinese numbering 2 (*gb2).
<b>\pgngbnuml</b>	Chinese numbering 3 (*gb3).
<b>\pgngbnumk</b>	Chinese numbering 4 (*gb4).
<b>\pgnzodiac</b>	Chinese Zodiac numbering 1 (*zodiac1).
<b>\pgnzodiacd</b>	Chinese Zodiac numbering 2 (*zodiac2).
<b>\pgnzodiacl</b>	Chinese Zodiac numbering 3 (*zodiac3).
<b>\pgnhindia</b>	Hindi vowel numeric format.
<b>\pgnhindib</b>	Hindi consonants.
<b>\pgnhindic</b>	Hindi digits.
<b>\pgnhindid</b>	Hindi descriptive (cardinal) text.
<b>\phnthaia</b>	Thai letters.
<b>\pgnthaib</b>	Thai digits.
<b>\pgnthaic</b>	Thai descriptive.
<b>\pgnviet</b>	Vietnamese descriptive.
<b>\pgnid</b>	Page number in dashes (Korean).
<b>\pgnhn/V</b>	Indicates which heading level is used to prefix a heading number to the page number. This control word can only be used in conjunction with numbered heading styles. A 0 (zero) specifies to not show heading level (the default). Values 1 through 9 correspond to heading levels 1 through 9.
<b>\pgnhnsh</b>	Hyphen separator character. This separator and the successive ones appear between the heading level number and the page number.
<b>\pgnhnsp</b>	Period separator character.
<b>\pgnhnsc</b>	Colon separator character.
<b>\pgnhnsm</b>	Em dash (—) separator character.
<b>\pgnhnsn</b>	En dash (–) separator character.
<b>Vertical Alignment</b>	
<b>\vertalt</b>	Text is top-aligned (the default).
<b>\vertalb</b>	Text is bottom-aligned.
<b>\vertalc</b>	Text is centered vertically.
<b>\vertalj</b>	Text is justified vertically.
<b>Bidirectional Controls</b>	
<b>\rtlsect</b>	This section will snake (newspaper style) columns from right to left.
<b>\ltrsect</b>	This section will snake (newspaper style) columns from left to right (the default).
<b>Asian Controls</b>	
<b>\horzsect</b>	Horizontal rendering.
<b>\vertsect</b>	Vertical rendering.
<b>Text Flow</b>	

Control word	Meaning
\textflow	Section property for specifying text flow:
0	Text flows left to right and top to bottom
1	Text flows top to bottom and right to left, vertical
2	Text flows left to right and bottom to top
3	Text flows right to left and top to bottom
4	Text flows left to right and top to bottom, vertical
5	Text flows vertically, non-vertical font

### Page Borders

\pgbrdrhead	Page border surrounds header.
\pgbrdrfoot	Page border surrounds footer.
\pgbrdrt	Page border top.
\pgbrdrb	Page border bottom.
\pgbrdrl	Page border left.
\pgbrdrr	Page border right.
\brdrartN	Page border art; the <b>N</b> argument is a value from 1 through 165 representing the number of the border.
\pgbrdroptN	8      Page border measure from text. <b>Always display in front</b> option is set to <b>off</b> . 32      Page border measure from edge of page. <b>Always display in front</b> option is set to <b>on</b> . 40      Page border measure from edge of page. <b>Always display in front</b> option is set to <b>off</b> .
\pgbrdrsnap	Align paragraph borders and table edges with page border.

### Line and Character Grid

\sectexpandN	Character space basement (character pitch minus font size) <b>N</b> in device-independent units (a device-independent unit is 1/294912th of an inch).
\sectlinegridN	Line grid, where <b>N</b> is the line pitch in 20ths of a point.
\sectdefaultcl	Default state of section. Indicates <b>\sectspecifycl</b> and <b>\sectspecifyl</b> are not emitted.
\sectspecifycl	Specify number of characters per line only.
\sectspecifyl	Specify both number of characters per line and number of lines per page.
\sectspecifygenN	Indicates that text should snap to the character grid. Note that the N is part of the keyword.

The color, width, border style, and border spacing keywords for page borders are the same as the keywords defined for paragraph borders.

### Headers and Footers

Headers and footers are RTF destinations. Each section in the document can have its own set of headers and footers. If no headers or footers are defined for a given section, the headers and footers from the previous section (if any) are used. Headers and footers have the following syntax:

```
<hdrftr>      '{' <hdrctl> <para>+ '}' <hdrftr>?
<hdrctl>      \header | \footer | \headerl | \headerr | \headerf | \footerl | \footerr | \footerf
```

**Note** Each separate <hdrftr> group must have a distinct <hdrctl> introducing it.

Control word	Meaning
<code>\header</code>	Header on all pages. This is a destination control word.
<code>\footer</code>	Footer on all pages. This is a destination control word.
<code>\headerl</code>	Header on left pages only. This is a destination control word.
<code>\headerr</code>	Header on right pages only. This is a destination control word.
<code>\headerf</code>	Header on first page only. This is a destination control word.
<code>\footerl</code>	Footer on left pages only. This is a destination control word.
<code>\footerr</code>	Footer on right pages only. This is a destination control word.
<code>\footerf</code>	Footer on first page only. This is a destination control word.

The `\headerl`, `\headerr`, `\footerl`, and `\footerr` control words are used in conjunction with the `\facingp` control word, and the `\headerf` and `\footerf` control words are used in conjunction with the `\titlepg` control word. Many RTF readers will not function correctly if the appropriate document properties are not set. In particular, if `\facingp` is not set, then only `\header` and `\footer` should be used; if `\facingp` is set, then only `\headerl`, `\headerr`, `\footerl`, and `\footerr` should be used. Combining both `\facingp` and `\titlepg` is allowed. You should not use `\header` to set the headers for both pages when `\facingp` is set. You can use `\headerf` if `\titlepg` is not set, but no header will appear. For more information, see [Document Formatting Properties](#) and [Section Formatting Properties](#) in this Specification.

If the previous section had a first page header or footer and had `\titlepg` set, and the current section does not, then the previous section's first page header or footer is disabled. However, it is not destroyed; if subsequent sections have `\titlepg` set, then the first page header or footer is restored.

## Paragraph Text

There are two kinds of paragraphs: *plain* and *table*. A table is a collection of paragraphs. A table row is a contiguous series of paragraphs partitioned into cells. The `\intbl` control word marks the paragraph as being part of a table. Additional keywords related to table styles are documented next, and refer to properties of the cell the paragraph resides within. For more information, see the [Table Definitions](#) section of this Specification. This control word is inherited by subsequent paragraphs not reset by the `\pard` control word.

<code>&lt;para&gt;</code>	<code>&lt;textpar&gt;</code>   <code>&lt;row&gt;</code>
<code>&lt;textpar&gt;</code>	<code>&lt;pn&gt;? &lt;brdrdef&gt;? &lt;parfmt&gt;* &lt;apoclt&gt;* &lt;tabdef&gt;? &lt;shading&gt;? (/v /spv)? (\subdocument   &lt;char&gt;+) (\par &lt;para&gt;)?</code>
<code>&lt;row&gt;</code>	<code>(&lt;tbldef&gt; &lt;cell&gt;+ &lt;tbldef&gt; \row)   (&lt;tbldef&gt; &lt;cell&gt;+ \row)   (&lt;cell&gt;+ &lt;tbldef&gt; \row)</code>
<code>&lt;cell&gt;</code>	<code>(&lt;nestrow&gt;? &lt;tbldef&gt;?) &amp; &lt;textpar&gt;+ \cell</code>
<code>&lt;nestrow&gt;</code>	<code>&lt;nestcell&gt;+ '{*\nesttableprops &lt;tbldef&gt; \nestrow '}'</code>
<code>&lt;nestcell&gt;</code>	<code>&lt;textpar&gt;+ \nestcell</code>

## Paragraph Formatting Properties

These control words (described as `<parfmt>` in the paragraph-text syntax description) specify generic paragraph formatting properties. These control words can appear anywhere in the body of the paragraph, not just at the beginning.

**Note** If the `\pard` control word is not present, the current paragraph inherits all paragraph properties from the previous paragraph.

The paragraph-formatting control words are listed in the following table.



Control word	Meaning
\par	New paragraph.
\pard	Resets to default paragraph properties.
\spv	Style separator feature that causes the paragraph mark to not appear even in ShowAll. Used to nest paragraphs within the document view or outline without generating a new heading.
\hyphpar	Toggles automatic hyphenation for the paragraph. Append 1 or nothing to toggle property on; append 0 to turn it off.
\intbl	Paragraph is part of a table.
\itapN	Paragraph nesting level, where 0 is the main document, 1 is a table cell, 2 is a nested table cell, 3 is a doubly nested table cell, and so forth. The default is 1.
\keep	Keep paragraph intact.
\keepn	Keep paragraph with the next paragraph.
\levelN	<b>N</b> is the outline level of the paragraph.
\noline	No line numbering.
\nowidctlpar	No widow/orphan control. This is a paragraph-level property and is used to override the document-level <b>\widowctrl</b> .
\widctlpar	Widow/orphan control is used for the current paragraph. This is a paragraph property used to override the absence of the document-level <b>\widowctrl</b> .
\outlinelevelN	Outline level of paragraph. The <b>N</b> argument is a value from 0 to 8 representing the outline level of the paragraph. In the default case, no outline level is specified (same as body text).
\pagebb	Break page before the paragraph.
\sbys	Side-by-side paragraphs.
\sN	Designates paragraph style. If a paragraph style is specified, style properties must be specified with the paragraph. <b>N</b> references an entry in the style sheet.

#### Table Style Specific

\yts	Designates the table style that was applied to the row/cell.
\tsfirstrow	This cell is in the first row.
\tsclastrow	This cell is in the last row.
\tsfirstcol	This cell is in the first column.
\tsclastcol	This cell is in the last column.
\tsbandhorzodd	This cell is in the odd row band.
\tsbandhorzeven	This cell is in the even row band.
\tsbandvertodd	This cell is in the odd column band.
\tsbandverteven	This cell is in the even column band.
\tscnwcell	This is the NW (north west) cell in the table (top left).
\tsnecell	NE cell.
\tscswcell	SW cell.
\tssecell	SE cell.

#### Alignment

\qc	Centered.
\qj	Justified.
\ql	Left-aligned (the default).
\qr	Right-aligned.
\qd	Distributed.
\qkN	Percentage of line occupied by Kashida justification (0 – low, 10 – medium, 20 – high).
\qt	For Thai distributed justification.

Control word	Meaning
<b>Font Alignment</b>	
<b>\fauto</b>	Font alignment. The default setting for this is "Auto."
<b>\fahang</b>	Font alignment: Hanging.
<b>\facenter</b>	Font alignment: Center.
<b>\faroman</b>	Font alignment : Roman (default).
<b>\favar</b>	Font alignment: Upholding variable.
<b>\fafixed</b>	Font alignment: Upholding fixed.
<b>Indentation</b>	
<b>\fiN</b>	First-line indent (the default is 0).
<b>\cufiN</b>	First-line indent in hundredths of a character unit; overrides <b>\fiN</b> , although they should both be emitted with equivalent values.
<b>\liN</b>	Left indent (the default is 0).
<b>\linN</b>	Left indent for left-to-right paragraphs; right indent for right-to-left paragraphs (the default is 0). <b>\linN</b> defines space before the paragraph.
<b>\culiN</b>	Left indent (space before) in hundredths of a character unit. Behaves like <b>\linN</b> and overrides <b>\liN</b> and <b>\linN</b> , although they should all be emitted with equivalent values.
<b>\riN</b>	Right indent (the default is 0).
<b>\rinN</b>	Right indent for left-to-right paragraphs; left indent for right-to-left paragraphs (the default is 0). <b>\rinN</b> defines space after the paragraph.
<b>\curiN</b>	Right indent (space after) in hundredths of a character unit. Behaves like <b>\rinN</b> and overrides <b>\riN</b> and <b>\rinN</b> , although they should all be emitted with equivalent values.
<b>\adjustright</b>	Automatically adjust right indent when document grid is defined.
<b>Spacing</b>	
<b>\sbN</b>	Space before (the default is 0).
<b>\saN</b>	Space after (the default is 0).
<b>\sbautoN</b>	Auto spacing before: 0 Space before determined by <b>\sb</b> 1 Space before is Auto (ignores <b>\sb</b> ) The default is 0.
<b>\saautoN</b>	Auto spacing after: 0 Space after determined by <b>\sa</b> 1 Space after is Auto (ignores <b>\sa</b> ) The default is 0.
<b>\lisbN</b>	Space before in hundredths of a character unit. Overrides <b>\sbN</b> , although they should both be emitted with equivalent values.
<b>\lisaN</b>	Space after in hundredths of a character unit. Overrides <b>\saN</b> , although they should both be emitted with equivalent values.
<b>\slN</b>	Space between lines. If this control word is missing or if <b>\sl0</b> is used, the line spacing is automatically determined by the tallest character in the line. If <b>N</b> is a positive value, this size is used only if it is taller than the tallest character (otherwise, the tallest character is used); if <b>N</b> is a negative value, the absolute value of <b>N</b> is used, even if it is shorter than the tallest character.
<b>\slmultN</b>	Line spacing multiple. Indicates that the current line spacing is a multiple of "Single" line spacing. This control word can follow only the <b>\sl</b> control word and works in conjunction with it. 0 "At Least" or "Exactly" line spacing 1 Multiple line spacing, relative to "Single"
<b>\nosnaplinegrid</b>	Disable snap line to grid.

Control word	Meaning
<b>Subdocuments</b>	
<code>\subdocumentN</code>	Indicates that a subdocument in a master document/subdocument relationship should occur here. <b>N</b> represents an index into the file table. This control word must be the only item in a paragraph.
<b>Bidirectional Controls</b>	
<code>\rtlpar</code>	Text in this paragraph will display with right-to-left precedence.
<code>\ltrpar</code>	Text in this paragraph will display with left-to-right precedence (the default).
<b>Asian Typography</b>	
<code>\nocwrap</code>	No character wrapping.
<code>\nowwrap</code>	No word wrapping.
<code>\nooverflow</code>	No overflow period and comma.
<code>\aspalpha</code>	Auto spacing between DBC and English.
<code>\aspnum</code>	Auto spacing between DBC and numbers.
<b>Pocket Word</b>	
<code>\collapsed</code>	Paragraph property active in outline view that specifies that the paragraph is collapsed (not viewed).

## Tabs

Any paragraph may have its own set of tabs. Tabs must follow this syntax:

<code>&lt;tabdef&gt;</code>	<code>(&lt;tab&gt;   &lt;bartab&gt;)+</code>
<code>&lt;tab&gt;</code>	<code>&lt;tabkind&gt;? &lt;tablead&gt;? \tx</code>
<code>&lt;bartab&gt;</code>	<code>&lt;tablead&gt;? \tb</code>
<code>&lt;tabkind&gt;</code>	<code>\tqr   \tqc   \tqdec</code>
<code>&lt;tablead&gt;</code>	<code>\tldot   \tlmdot   \tlhyph   \tlul   \tlth   \tleq</code>

Control word	Meaning
<code>\txN</code>	Tab position in twips from the left margin.
<code>\tqr</code>	Flush-right tab.
<code>\tqc</code>	Centered tab.
<code>\tqdec</code>	Decimal tab.
<code>\tbN</code>	Bar tab position in twips from the left margin.
<code>\tldot</code>	Leader dots.
<code>\tlmdot</code>	Leader middle dots.
<code>\tlhyph</code>	Leader hyphens.
<code>\tlul</code>	Leader underline.
<code>\tlth</code>	Leader thick line.
<code>\tleq</code>	Leader equal sign.

## Bullets and Numbering

### Word 6.0 and Word 95 RTF

To provide compatibility with existing RTF readers, all applications that can automatically format paragraphs with bullets or numbers will also emit the generated text as plain text in the **\pntext** group. This allows existing RTF readers to capture the plain text and safely ignore the auto number instructions. This group precedes all bulleted or numbered paragraphs, and contains all the automatically generated text and formatting. It should precede the '{'\\* \pn ... '}' destination,

and it is the responsibility of RTF readers that understand the '{\\*\pn ... }' destination to ignore the **\pntext** group. The following table defines the grammar of this group.

<pn>	<pnsclvl>   <pnpa>
<pnsclvl>	'{\*\pn <b>pnsclvl</b> <pndesc>}'
<pnpa>	<pntext> <pnpa>
<pntext>	'{\*\pn <b>pntext</b> <char> }'
<pnpa>	'{\*\pn <pnlvl> <pndesc>}'
<pnlvl>	\pnlvl   \pnlvlblt   \pnlvlbody   \pnlvlcont
<pndesc>	<pnnstyle> & <pnrchfmt> & <pntxtb> & <pntxta> & <pnfmt>
<pnnstyle>	\pncard   \pndec   \pnucltr   \pnucrm   \pnlctr   \pnlcrm   \pnord   \pnordt   \pnbida   \pnbidib   \pnaiu   \pnaiud   \pnaiueo   \pnaiueod   \pnchosung   \pncnum   \pndbnum   \pndbnumd   \pndbnumk   \pndbnuml   \pndbnumt   \pndecd   \pnganada   \pnganada   \pngbnum   \pngbnumd   \pngbnumk   \pngbnuml   \pniroha   \pnirohad   \pnuldash   \pnuldashd   \pnuldashdd   \pnulhair   \pnulth   \pnulwave   \pnzodiac   \pnzodiacd   \pnzodiacl
<pnrchfmt>	\pnf? & \pnfs? & \pnb? & \pni? & \pncaps? & \pnscaps? & <pnl>? & \pnstrike? & \pncl?
<pnl>	\pnul   \pnuld   \pnuldb   \pnulnone   \pnulw
<pnfmt>	\pnnumonce? & \pnacross? & \pnindent? & \pnsp? & \pnprev? & <pjust>? & \pnstart? & \pnhang? & \pnrestart?
<pjust>	\pnqc   \pnql   \pnqr
<pntxtb>	'{\*\pn <b>pntxtb</b> #PCDATA}'
<pntxta>	'{\*\pn <b>pntxta</b> #PCDATA}'

Settings in the following table marked with an asterisk can be turned off by appending 0 to the control word.

Control word	Meaning
\pntext	This group precedes all numbered/bulleted paragraphs and contains all automatically generated text and formatting. It should precede the '{\*\pn ... }' destination, and it is the responsibility of RTF readers that understand the '{\*\pn ... }' destination to ignore this preceding group. This is a destination control word.
\pn	Turns on paragraph numbering. This is a destination control word.
\pnlvlN	Paragraph level, where <b>N</b> is a level from 1 to 9. Default set by \pnseclvlN section formatting property.
\pnlvlblt	Bulleted paragraph (corresponds to level 11). The actual character used for the bullet is stored in the \pntxtb group.
\pnlvlbody	Simple paragraph numbering (corresponds to level 10).
\pnlvlcont	Continue numbering but do not display number ("skip numbering").
\pnnumonce	Number each cell only once in a table (default is to number each paragraph in a table).
\pnacross	Number across rows (the default is to number down columns).
\pnhang	Paragraph uses a hanging indent.
\pnrestart	Restart numbering after each section break. Note that this control word is used only in conjunction with the Heading Numbering feature (applying multilevel numbering to Heading style definitions).
\pncard	Cardinal numbering (One, Two, Three).
\pndec	Decimal numbering (1, 2, 3).
\pnucltr	Uppercase alphabetic numbering (A, B, C).
\pnucrm	Uppercase Roman numbering (I, II, III).
\pnlcltr	Lowercase alphabetic numbering (a, b, c).
\pnlcrm	Lowercase Roman numbering (i, ii, iii).
\pnord	Ordinal numbering (1st, 2nd, 3rd).
\pnordt	Ordinal text numbering (First, Second, Third).
\pnbidia	Abjad Jawaz if language is Arabic and Biblical Standard if language is Hebrew.
\pnbidib	Alif Ba Tah if language is Arabic and Non-standard Decimal if language is Hebrew.
\pnaiu	46 phonetic katakana characters in "aiueo" order (\*aiueo).
\pnaiud	46 phonetic double-byte katakana characters (\*aiueo\dbchar).
\pnaieuo	46 phonetic katakana characters in "aiueo" order (*aiueo).
\pnaieud	46 phonetic double-byte katakana characters (*aiueo\dbchar).
\pnchosung	Korean numbering 2 (*chosung).
\pncnum	20 numbered list in circle (\*circenum).
\pndbnum	Kanji numbering without the digit character (\*dbnum1).
\pndbnumd	Kanji numbering with the digit character (*dbnum2).
\pndbnumk	Kanji numbering 4 (*dbnum4).
\pndbnuml	Kanji numbering 3 (*dbnum3).
\pndbnumt	Kanji numbering 3 (*dbnum3).
\pndec	Double-byte decimal numbering (\*arabic\dbchar).
\pnganada	Korean numbering 2 (*ganada).
\pnganada	Korean numbering 1 (*ganada).
\pngbnum	Chinese numbering 1 (*gb1).
\pngbnumd	Chinese numbering 2 (*gb2).
\pngbnumk	Chinese numbering 4 (*gb4).
\pngbnuml	Chinese numbering 3 (*gb3).

Control word	Meaning
<b>\pniroha</b>	46 phonetic katakana characters in "iroha" order ( <b>\*iroha</b> ).
<b>\pnirohad</b>	46 phonetic double-byte katakana characters ( <b>\*iroha\*dbchar</b> ).
<b>\pnuldash</b>	Dashed underline.
<b>\pnuldashd</b>	Dash-dotted underline.
<b>\pnuldashdd</b>	Dash-dot-dotted underline.
<b>\pnulhair</b>	Hairline underline.
<b>\pnulth</b>	Thick underline.
<b>\pnulwave</b>	Wave underline.
<b>\pnzodiac</b>	Chinese Zodiac numbering 1 ( <b>*zodiac1</b> ).
<b>\pnzodiacd</b>	Chinese Zodiac numbering 2 ( <b>*zodiac2</b> ).
<b>\pnzodiacl</b>	Chinese Zodiac numbering 3 ( <b>*zodiac3</b> ).
<b>\pnb</b>	Bold numbering.*
<b>\pni</b>	Italic numbering.*
<b>\pncaps</b>	All caps numbering.*
<b>\pns caps</b>	Small caps numbering.*
<b>\pnul</b>	Continuous underline.*
<b>\pnuld</b>	Dotted underline.
<b>\pnuldb</b>	Double underline.
<b>\pnulnone</b>	Turns off underlining.
<b>\pnulw</b>	Word underline.
<b>\pnstrike</b>	Strikethrough numbering.*
<b>\pncfN</b>	Foreground color—index into color table (the default is 0).
<b>\pnfN</b>	Font number.
<b>\pnfsN</b>	Font size (in half-points).
<b>\pnindentN</b>	Minimum distance from margin to body text.
<b>\pnspN</b>	Distance from number text to body text.
<b>\pnprev</b>	Used for multilevel lists. Include information from previous level in this level; for example, 1, 1.1, 1.1.1, 1.1.1.1
<b>\pnqc</b>	Centered numbering.
<b>\pnql</b>	Left-justified numbering.
<b>\pnqr</b>	Right-justified numbering.
<b>\pnstartN</b>	Start at number.
<b>\pntxta</b>	Text after. This group contains the text that succeeds the number. This is a destination control word.
<b>\pntxtb</b>	Text before. This group contains the text that precedes the number. This is a destination control word.

**Note** there is a limit of 32 characters total for the sum of text before, and text after, simple numbering. Multilevel numbering has a limit of 64 characters total for the sum of all levels.

#### Word 97 through Word 2003 RTF

Each paragraph that is part of a list must contain some keyword to indicate which list it's in, and which level of the list it belongs to. Word 97 through Word 2003 also provide the flat text representation of each number (in the **\listtext** destination); so, RTF readers that don't understand Word 97 numbering will get the paragraph number, along with appropriate character properties,

inserted into their document at the beginning of the paragraph. Any RTF reader that does understand Word 97 through Word 2003 numbering should ignore the entire **\listtext** destination.

Control word	Meaning
<b>\ls</b>	Should exactly match the <b>ls</b> for one of the list overrides in the List Override table.
<b>\lvl</b>	The 0-based level of the list to which the paragraph belongs. For all simple lists, this should always be 0. For multilevel lists, it can be 0 through 8.
<b>\listtext</b>	Contains the flat text representation of the number, including character properties. Should be ignored by any reader that understands Word 97 through Word 2003 numbering. This is a destination control word.

### Revision Marks for Paragraph Numbers and ListNum Fields

Paragraph numbers and ListNum fields track revision information with special properties applied to the paragraph mark and ListNum field, respectively. The special properties hold the "old" value of the number—the value it held when revision-mark tracking began. At display time, Word checks the number's current value and compares it with this "old" value to determine whether it has changed. If the numbers are different, the old value shows up as deleted and the new value as inserted. If the numbers are the same, Word displays the new value normally, with no revision information. If there was no old value, the new value shows up as inserted. The following table lists the RTF specifications for these special properties.

Control word	Meaning
<b>\pnrauth</b> <i>N</i>	Index into the revision table. The content of the <b>N</b> th group in the revision table is considered to be the author of that revision.  <b>Note</b> This keyword is used to indicate paragraph number revisions.
<b>\pnrdate</b> <i>N</i>	Time of the revision. The 32-bit DTTM structure is emitted as a long integer.
<b>\pnrnot</b>	Indicates whether the paragraph number for the current paragraph is marked as "inserted."
<b>\pnrxst</b> <i>N</i>	The keywords <b>\pnrxst</b> , <b>\pnrrgb</b> , <b>\pnrpnbr</b> , and <b>\pnrnfc</b> describe the "deleted number" text for the paragraph number. Their values are binary. Each of these keywords is represented as an array. The deleted number is written out with a <b>\pnrstart</b> keyword, followed by the array's keyword, followed by the first byte of the array, followed by the array's keyword, followed by the second byte of the array's keyword, followed by the array's keyword, followed by the third byte of the array's keyword, and so on. This sequence is followed by the <b>\pnrstop</b> keyword.  <b>\pnrxst</b> is a 32-item Unicode character array (double bytes for each character) with a length byte as the first number—it has the actual text of the number, with "level" place holders written out as digits from 0 through 8.
<b>\pnrrgb</b> <i>N</i>	Nine-item array of indices of the level place holders in the <b>\pnrxst</b> array.
<b>\pnrnfc</b> <i>N</i>	Nine-item array containing the number format codes of each level (using the same values as the <b>\levelnfc</b> keyword). The number format code is represented as a short integer.
<b>\pnrpnbr</b> <i>N</i>	Nine-item array of the actual values of the number in each level. The number is represented as a long integer.
<b>\pnrstart</b> <i>N</i>	The <b>\pnrxst</b> , <b>\pnrrgb</b> , <b>\pnrpnbr</b> , and <b>\pnrnfc</b> arrays are each preceded by the <b>\pnrstart</b> keyword, whose argument is 0 through 3, depending on the array.
<b>\pnrstop</b> <i>N</i>	The <b>\pnrxst</b> , <b>\pnrrgb</b> , <b>\pnrpnbr</b> , and <b>\pnrnfc</b> arrays are each terminated by the <b>\pnrstop</b> keyword, whose argument is the number of bytes written out in the array.

### Example

Let's take an example of the number "3-4b." which represents the third level of the list. The following table lists the values of each array.





Control word	Meaning
<b>Track Changes (Revision Mark) Properties for ListNum Fields</b>	
<code>\dfrauthN</code>	Index into the revision table. The content of the <b>N</b> th group in the revision table is considered the author of that revision.  <b>Note</b> This keyword is used to indicate the deleted value of a ListNum field.
<code>\dfrdateN</code>	Time of the revision. The 32-bit DTTM structure is emitted as a long integer.
<code>\dfrxst</code>	Unicode character array with a length byte.
<code>\dfrstart</code>	The <code>\dfrxst</code> array is preceded by the <code>\dfrstart</code> keyword.
<code>\dfrstop</code>	The <code>\dfrxst</code> array is terminated by the <code>\dfrstop</code> keyword.

Example

Let’s look again at the preceding example, in which the deleted value is "3-4b." The RTF would then be

```
\dfrstart0\dfrxst0\dfrxst5\dfrxst0\dfrxst51\dfrxst0\dfrxst45\dfrxst0\dfrxst52
\dfrxst0\dfrxst66\dfrxst0\dfrxst46\dfrstop10
```

where 5 is the length byte, 51 is Unicode for "3", 45 is Unicode for "-", 52 is Unicode for "4", and so on.

Paragraph Borders

Paragraph borders have the following syntax:

```
<brdrdef>      (<brdrseg> <brdr> )+
<brdrseg>      \brdrt | \brdrb | \brdrl | \brdrr | \brdrbtw | \brdrbar | \box
<brdr>         <brdrk> \brdrw? \brsp? \brdrcl?
<brdrk>        \brdrs | \brdrth | \brdrsh | \brdrdb | \brdrdot | \brdrdash | \brdrhair | brdrinset | \brdrdashsm |
               \brdrdashd | \brdrdashdd | \brdrtriple | \brdrtnthsg | \brdrthtnsg | \brdrtnthtnsg | \brdrtnthmg |
               \brdrthtnmg | \brdrtnthtnmg | \brdrtnthlg | \brdrthtnlg | \brdrtnthtnlg | \brdrwavy |
               \brdrwavydb | \brdrdashdotstr | \brdremboss | \brdrengrave \brdroutset | \brdrnone | \brdrtbl
               | \brdrnil
```

Control word	Meaning
\brdrt	Border top.
\brdrb	Border bottom.
\brdrl	Border left.
\brdrr	Border right.
\brdrbtw	Consecutive paragraphs with identical border formatting are considered part of a single group with the border information applying to the entire group. To have borders around individual paragraphs within the group, the <b>\brdrbtw</b> control must be specified for that paragraph.
\brdrbar	Border outside (right side of odd-numbered pages, left side of even-numbered pages).
\box	Border around the paragraph (box paragraph).
\brdrs	Single-thickness border.
\brdrth	Double-thickness border.
\brdrsh	Shadowed border.
\brdrdb	Double border.
\brdrdot	Dotted border.
\brdrdash	Dashed border.
\brdrhair	Hairline border.
\brdrinset	Inset border.
\brdrdashsm	Dashed border (small).
\brdrdashd	Dot-dashed border.
\brdrdashdd	Dot-dot-dashed border.
\brdroutset	Outset border.
\brdrtriple	Triple border.
\brdrtnthsg	Thick-thin border (small).
\brdrthtnsg	Thin-thick border (small).
\brdrtnthtnsg	Thin-thick thin border (small).
\brdrtnthmg	Thick-thin border (medium).
\brdrthtnmg	Thin-thick border (medium).
\brdrtnthtnmg	Thin-thick thin border (medium).
\brdrtnthlg	Thick-thin border (large).
\brdrthtnlg	Thin-thick border (large).
\brdrtnthtnlg	Thin-thick-thin border (large).
\brdrwavy	Wavy border.
\brdrwavydb	Double wavy border.
\brdrdashdotstr	Striped border.
\brdremboss	Embossed border.
\brdrengrave	Engraved border.
\brdrframe	Border resembles a "Frame."
\brdrwN	<b>N</b> is the width in twips of the pen used to draw the paragraph border line. <b>N</b> cannot be greater than 75. To obtain a larger border width, the <b>\brdth</b> control word can be used to obtain a width double that of <b>N</b> .
\brdrwfN	<b>N</b> is the color of the paragraph border, specified as an index into the color table in the RTF header.
\brspN	Space in twips between borders and the paragraph.
\brdrnil	No border specified.

Control word	Meaning
<code>\brdrtbl</code>	Table cell has no borders.

## Paragraph Shading

Paragraph shading has the following syntax:

<code>&lt;shading&gt;</code>	<code>(\shading   &lt;pat&gt;) \cfpat? \cbpat?</code>
<code>&lt;pat&gt;</code>	<code>\bghoriz   \bgvert   \bgfdiag   \bgbdiag   \bgcross   \bgdcross   \bgdkhoriz   \bgdkvert   \bgdkfdiag   \bgdkbdiag   \bgdkcross   \bgdkdcross</code>

Control word	Meaning
<code>\shading/N</code>	<b>N</b> is the shading of the paragraph in hundredths of a percent.
<code>\bghoriz</code>	Specifies a horizontal background pattern for the paragraph.
<code>\bgvert</code>	Specifies a vertical background pattern for the paragraph.
<code>\bgfdiag</code>	Specifies a forward diagonal background pattern for the paragraph (\\\\).
<code>\bgbdiag</code>	Specifies a backward diagonal background pattern for the paragraph (////).
<code>\bgcross</code>	Specifies a cross background pattern for the paragraph.
<code>\bgdcross</code>	Specifies a diagonal cross background pattern for the paragraph.
<code>\bgdkhoriz</code>	Specifies a dark horizontal background pattern for the paragraph.
<code>\bgdkvert</code>	Specifies a dark vertical background pattern for the paragraph.
<code>\bgdkfdiag</code>	Specifies a dark forward diagonal background pattern for the paragraph (\\\\).
<code>\bgdkbdiag</code>	Specifies a dark backward diagonal background pattern for the paragraph (////).
<code>\bgdkcross</code>	Specifies a dark cross background pattern for the paragraph.
<code>\bgdkdcross</code>	Specifies a dark diagonal cross background pattern for the paragraph.
<code>\cfpat/N</code>	<b>N</b> is the fill color, specified as an index into the document's color table.
<code>\cbpat/N</code>	<b>N</b> is the background color of the background pattern, specified as an index into the document's color table.

## Positioned Objects and Frames

The following paragraph-formatting control words specify the location of a paragraph on the page. Consecutive paragraphs with the same frame formatting are considered part of the same frame. For two framed paragraphs to appear at the same position on a page, they must be separated by a paragraph with different or no frame information.

**Note** if any paragraph in a table row has any of these control words specified, then all paragraphs in the table row must have the same control words specified, either by inheriting the properties from the previous paragraph or by re-specifying the controls.

Paragraph positioning has the following syntax:

<apoptl>	<framesize> & <horzpos> & <vertpos> & <txtwrap> & <dropcap> & <txtflow> & <b>\absnoovrlp?</b>
<framesize>	\absw? & \absh?
<horzpos>	<hframe> & <hdist>
<vertpos>	<vframe> & <vdist>
<txtwrap>	\nowrap? & \dxfrtext? & \dfrmttxt? & \dfrmttxy?
<dropcap>	\dropcapli? & \dropcapt?
<hframe>	\phmrg?   \phpg?   \phcol?
<hdist>	\posx?   \posnegx?   \posxc?   \posxi?   \posxo?   \posxl?   \posxr?
<vframe>	\pvmrg?   \vpvg?   \pvpara?
<vdist>	\posy?   \posnegy?   \posyt?   \posyil?   \posyb?   \posyc?   \posyin?   \posyout? & \abslock?
<txtflow>	\frmtxlrtb   \frmtxtbrl   \frmtxbtlr   \frmtxlrtbv   \frmtxtbrlv

Control word	Meaning
<b>Frame Size</b>	
<code>\abswN</code>	<b>N</b> is the width of the frame in twips.
<code>\abshN</code>	<b>N</b> is the height of the frame in twips. A positive number indicates the minimum height of the frame, and a negative number indicates the exact height of the frame. A value of zero indicates that the height of the frame adjusts to the contents of the frame. This is the default for frames where no height is given.
<b>Horizontal Position</b>	
<code>\phmrg</code>	Use the margin as the horizontal reference frame.
<code>\phpg</code>	Use the page as the horizontal reference frame.
<code>\phcol</code>	Use the column as the horizontal reference frame. This is the default if no horizontal reference frame is given.
<code>\posxN</code>	Positions the frame <b>N</b> twips from the left edge of the reference frame.
<code>\posnegxN</code>	Same as <code>\posx</code> but allows arbitrary negative values.
<code>\posxc</code>	Centers the frame horizontally within the reference frame.
<code>\posxi</code>	Positions the paragraph horizontally inside the reference frame.
<code>\posxo</code>	Positions the paragraph horizontally outside the reference frame.
<code>\posxr</code>	Positions the paragraph to the right within the reference frame.
<code>\posxl</code>	Positions the paragraph to the left within the reference frame. This is the default if no horizontal positioning information is given.
<b>Vertical Position</b>	
<code>\pvmrg</code>	Positions the reference frame vertically relative to the margin. This is the default if no vertical frame positioning information is given.
<code>\pvpg</code>	Positions the reference frame vertically relative to the page.
<code>\pvpara</code>	Positions the reference frame vertically relative to the top left corner of the next unframed paragraph in the RTF stream.
<code>\posyN</code>	Positions the paragraph <b>N</b> twips from the top edge of the reference frame.
<code>\posnegyN</code>	Same as <code>\posy</code> but allows arbitrary negative values.
<code>\posyil</code>	Positions the paragraph vertically to be inline.
<code>\posyt</code>	Positions the paragraph at the top of the reference frame.
<code>\posyc</code>	Centers the paragraph vertically within the reference frame.
<code>\posyb</code>	Positions the paragraph at the bottom of the reference frame.
<code>\posyin</code>	Positions the paragraph vertically inside the reference frame.
<code>\posyout</code>	Positions the paragraph vertically outside the reference frame.
<code>\abslockN</code>	Lock anchor: 0 Do not lock anchor (default). 1 Locks a frame anchor to the current paragraph that it is associated with.
<b>Text Wrapping</b>	
<code>\nowrap</code>	Prevents text from flowing around the positioned object.
<code>\dxfrtextN</code>	Distance in twips of a positioned paragraph from text in the main text flow in all directions.
<code>\dfrmtxtxN</code>	<b>N</b> is the horizontal distance in twips from text on both sides of the frame.
<code>\dfrmtxtyN</code>	<b>N</b> is the vertical distance in twips from text on both sides of the frame.
<code>\overlay</code>	Text flows underneath frame.
<b>Drop Caps</b>	
<code>\dropcapliN</code>	Number of lines drop cap is to occupy. The range is 1 through 10.

Control word	Meaning
<code>\dropcapN</code>	Type of drop cap: <ul style="list-style-type: none"> <li>1 In-text drop cap</li> <li>2 Margin drop cap</li> </ul>
<b>Overlap</b>	
<code>\absnoovrlpN</code>	Allow overlap with other frames or objects with similar wrapping: <ul style="list-style-type: none"> <li>0 Allow overlap (default)</li> <li>1 Do not allow overlap</li> </ul>
<b>Text Flow</b>	
<code>\frmtxlrtb</code>	Frame box flows from left to right and top to bottom (default).
<code>\frmtxtbrl</code>	Frame box flows right to left and top to bottom.
<code>\frmtxbtlr</code>	Frame box flows left to right and bottom to top.
<code>\frmtxlrtbv</code>	Frame box flows left to right and top to bottom, vertical.
<code>\frmtxtbrlv</code>	Frame box flows top to bottom and right to left, vertical.

The following is an example of absolute-positioned text in a document:

```
\par \pard \pvpg\phpg\posxc\posyt\absw5040\dxfrtest173 First APO para
\par \pard \phmrg\posxo\posyc\dxfrtext1152 Second APO para
```

## Table Definitions

There is no RTF table group; instead, tables are specified as paragraph properties. A table is represented as a sequence of table rows. A table row is a contiguous series of paragraphs partitioned into cells. The table row begins with the **\trowd** control word and ends with the **\row** control word. Every paragraph that is contained in a table row must have the **\intbl** control word specified or inherited from the previous paragraph. A cell may have more than one paragraph in it; the cell is terminated by a cell mark (the **\cell** control word), and the row is terminated by a row mark (the **\row** control word). Table rows can also be positioned. In this case, every paragraph in a table row must have the same positioning controls (see the <apoc> controls on the [Positioned Objects and Frames](#) subsection of this Specification. Table properties may be inherited from the previous row; therefore, a series of table rows may be introduced by a single <tbldef>.

An RTF table row has the following syntax, as shown in the general paragraph-text syntax shown in the [Paragraph Text](#) section of this Specification:

```
<row>          (<tbldef> <cell>+ <tbldef> \row) | (<tbldef> <cell>+ \row) | (<cell>+ <tbldef> \row)
<cell>         (<nestrow>? <tbldef>?) & <textpar>+ \cell
<nestrow>      <nestcell>+ '{\*\nesttableprops <tbldef> \nestrow }'
<nestcell>     <textpar>+ \nestcell
```

**Note** while Word 97 emitted the row properties (<tbldef>) at the beginning of the row, a reader should not assume that this is the case. Properties can be emitted at the end, and, in fact, Word 2002 and Word 2003 do this. To avoid breaking readers that might make the aforementioned assumption, Word 2002 and Word 2003 will write a copy at the beginning as well, so the properties of a typical row in a Word 2002 or Word 2003 document are repeated at the beginning and at the end of the row. Note that for nested cells, Word 2002 and Word 2003 write the properties at the end only.

A table definition has the following syntax:

<tbldef>	<b>\trowd \irowN \irowbandN \tsN \trgaph</b> & <rowjust>? & <rowwrite>? & <rowtop>? & <rowbot>? & <rowleft>? & <rowright>? & <rowhor>? & <rowvert>? & <rowpos> ? & <b>\trleft?</b> & <b>\trrh?</b> & <b>\trhdr?</b> & <b>\trkeep?</b> & <rowwidth>? & <rowinv>? & <b>\trautofit?</b> & <rowspc>? & <rowpad>? & <b>\taprtl?</b> <trrevision>? <tflags>? <celldef>+
<rowjust>	\trql   \trqr   \trqc
<rowwrite>	\ltrrow   \rtlrow
<rowtop>	\trbrdrt <brdr>
<rowbot>	\trbrdrb <brdr>
<rowleft>	\trbrdrl <brdr>
<rowright>	\trbrdrr <brdr>
<rowhor>	\trbrdrh <brdr>
<rowvert>	\trbrdrv <brdr>
<rowpos>	<rowhorzpos> & <rowvertpos> & <rowwrap> & <b>\tabsnoovrlp?</b>
<rowhorzpos>	<rowhframe>& <rowhdist>
<rowvertpos>	<rowvframe>& <rowvdist>
<rowwrap>	\tdfrmtxtLeft? & \tdfrmtxtRight? & \tdfrmtxtTop? & \tdfrmtxtBottom?
<rowhframe>	\phmrg?   \phpg?   \phcol?
<rowhdist>	\tposx?   \tposnegx?   \tposxc?   \tposxi?   \tposxo?   \tposxl?   \tposxr?
<rowvframe>	\tpvmrg?   \tpvpg?   \tpvpara?
<rowvdist>	\tposy?   \tposnegy?   \tposyt?   \tposyil?   \tposyb?   \tposyc?   tposyin   tposyout
<rowwidth>	\trftsWidth & \trwWidth?
<rowinv>	(\trftsWidthB & \trwWidthB)? & (\trftsWidthA & \trwWidthA)?
<rowspc>	(\trspdI & \trspdfI)? & (\trspdt & \trspdfT)? & (\trspdb & \trspdfb)? & (\trspdr & \trspdfR)?
<rowpad>	(\trpaddI & \trpaddfI)? & (\trpaddt & \trpaddfT)? & (\trpaddb & \trpaddfb)? & (\trpaddr & \trpaddfr)?
<trrevision>	\trauthN \trdateN
<tflags>	\tbllkborder & \tbllkshading & \tbllkfont & \tbllkcolor & \tbllkbestfit & \tbllkhdrrows & \tbllklastrow & \tbllkhdrcols & \tbllklastcol
<celldef>	( <b>\clmgf?</b> & <b>\clmrg?</b> & <b>\clvmgf?</b> & <b>\clvmrg?</b> <celldgu>? & <celldgl>? & <cellalign>? & <celltop>? & <cellleft>? & <cellbot>? & <cellright>? & <cellshad>? & <cellflow>? & <b>clFitText?</b> & <b>clNoWrap?</b> & <cellwidth>? & <cellpad>?) <b>\cellx</b>
<celldgu>	\cldglu <brdr>
<celldgl>	\cldgll <brdr>
<cellalign>	\clvertalt   \clvertalc   \clvertalb
<celltop>	\clbrdrt <brdr>
<cellleft>	\clbrdrl <brdr>
<cellbot>	\clbrdrb <brdr>
<cellright>	\clbrdrr <brdr>
<cellshad>	<cellpat>? \clcfpat? & \clcbpat? & \clshdng
<cellpat>	\clbgghoriz   \clbgvert   \clbgfdiag   \clbgbdiag   \clbgcross   \clbgdcross   \clbgdkhor   \clbgdkvert   \clbgdkfdiag   \clbgdkbdiag   \clbgdkcross   \clbgdkdcross
<cellflow>	\cltxlrb   \cltxtblr   \cltxbtlr   \cltxlrbv   \cltxtblrv
<cellwidth>	\clftsWidth & \clwWidth?
<cellpad>	(\clpadI & \clpadfI)? & (\clpadt & \clpadfT)? & (\clpadb & \clpadfb)? & (\clpadr & \clpadfr)?

**Note** For <tbldef> the number of **\cellxs** must match the number of **\cells** in the **\row**.

The following control words further define options for each row of the table.

Control word	Meaning
<code>\trowd</code>	Sets table row defaults.
<code>\irowN</code>	<b>N</b> is the row index of this row.
<code>\irowbandN</code>	<b>N</b> is the row index of the row, adjusted to account for header rows. A header row has a value of -1.
<code>\row</code>	Denotes the end of a row.
<code>\lastrow</code>	Output if this is the last row in the table.
<code>\tcelld</code>	Sets table cell defaults.
<code>\nestcell</code>	Denotes the end of a nested cell.
<code>\nestrow</code>	Denotes the end of a nested row.
<code>\nesttableprops</code>	Defines the properties of a nested table. This is a destination control word.
<code>\nonesttables</code>	Contains text for readers that do not understand nested tables. This destination should be ignored by readers that support nested tables.
<code>\trgaphN</code>	Half the space between the cells of a table row in twips.
<code>\cellxN</code>	Defines the right boundary of a table cell, including its half of the space between cells.
<code>\cell</code>	Denotes the end of a table cell.
<code>\clmgf</code>	The first cell in a range of table cells to be merged.
<code>\clmrg</code>	Contents of the table cell are merged with those of the preceding cell.
<code>\clvmgf</code>	The first cell in a range of table cells to be vertically merged.
<code>\clvmrg</code>	Contents of the table cell are vertically merged with those of the preceding cell.

#### Table Row Revision Tracking

<code>\trauthN</code>	With revision tracking enabled, this control word identifies the author of changes to a table row's properties. <b>N</b> refers to a value in the revision table.
<code>\trdateN</code>	With revision tracking enabled, this control word identifies the date of a revision.

#### Autoformatting Flags

<code>\tbllkborder</code>	Flag sets table autoformat to format borders.
<code>\tbllkshading</code>	Flag sets table autoformat to affect shading.
<code>\tbllkfont</code>	Flag sets table autoformat to affect font.
<code>\tbllkcolor</code>	Flag sets table autoformat to affect color.
<code>\tbllkbestfit</code>	Flag sets table autoformat to apply best fit.
<code>\tbllkhdrrows</code>	Flag sets table autoformat to format the first (header) row.
<code>\tbllklastrow</code>	Flag sets table autoformat to format the last row.
<code>\tbllkhdrcols</code>	Flag sets table autoformat to format the first (header) column.
<code>\tbllklastcol</code>	Flag sets table autoformat to format the last column.

#### Row Formatting

<code>\taprtl</code>	Table direction is right to left.
<code>\trautofitN</code>	AutoFit: 0 No AutoFit (default). 1 AutoFit is on for the row. Overridden by <code>\clwWidthN</code> and <code>\trwWidthN</code> in any table row.
<code>\trhdr</code>	Table row header. This row should appear at the top of every page on which the current table appears.



Control word	Meaning
<code>\trkeep</code>	Keep table row together. This row cannot be split by a page break. This property is assumed to be off unless the control word is present.
<code>\trkeepfollow</code>	Keep row in the same page as the following row.
<code>\trleftN</code>	Position in twips of the leftmost edge of the table with respect to the left edge of its column.
<code>\trqc</code>	Centers a table row with respect to its containing column.
<code>\trql</code>	Left-justifies a table row with respect to its containing column.
<code>\trqr</code>	Right-justifies a table row with respect to its containing column.
<code>\trrhN</code>	Height of a table row in twips. When 0, the height is sufficient for all the text in the line; when positive, the height is guaranteed to be at least the specified height; when negative, the absolute value of the height is used, regardless of the height of the text in the line.
<code>\trpaddbN</code>	Default bottom cell margin or padding for the row.
<code>\trpaddlN</code>	Default left cell margin or padding for the row.
<code>\trpaddrN</code>	Default right cell margin or padding for the row.
<b><code>\trpaddtN</code></b>	Default top cell margin or padding for the row.
<code>\trpaddfbN</code>	Units for <b><code>\trpaddbN</code></b> : 0 Null. Ignore <b><code>\trpaddbN</code></b> in favor of <b><code>\trgaph</code></b> (Word 97 style padding). 3 Twips.
<code>\trpaddflN</code>	Units for <b><code>\trpaddlN</code></b> : 0 Null. Ignore <b><code>\trpaddlN</code></b> in favor of <b><code>\trgaph</code></b> (Word 97 style padding). 3 Twips.
<code>\trpaddrN</code>	Units for <b><code>\trpaddrN</code></b> : 0 Null. Ignore <b><code>\trpaddrN</code></b> in favor of <b><code>\trgaph</code></b> (Word 97 style padding). 3 Twips.
<code>\trpaddftN</code>	Units for <b><code>\trpaddtN</code></b> : 0 Null. Ignore <b><code>\trpaddtN</code></b> in favor of <b><code>\trgaph</code></b> (Word 97 style padding). 3 Twips.
<code>\trspdlN</code>	Default left cell spacing for the row. The total horizontal spacing between adjacent cells is equal to the sum of <b><code>\trspdlN</code></b> from the rightmost cell and <b><code>\trspdrN</code></b> from the leftmost cell, both of which will have the same value when written by Word.
<code>\trspdtN</code>	Default top cell spacing for the row. The total horizontal spacing between adjacent cells is equal to the sum of <b><code>\trspdtN</code></b> from the bottom cell and <b><code>\trspdbN</code></b> from the top cell, both of which will have the same value when written by Word.
<code>\trspdbN</code>	Default bottom cell spacing for the row. The total horizontal spacing between adjacent cells is equal to the sum of <b><code>\trspdtN</code></b> from the bottom cell and <b><code>\trspdbN</code></b> from the top cell, both of which will have the same value when written by Word.
<code>\trspdrN</code>	Default right cell spacing for the row. The total horizontal spacing between adjacent cells is equal to the sum of <b><code>\trspdlN</code></b> from the rightmost cell and <b><code>\trspdrN</code></b> from the leftmost cell, both of which will have the same value when written by Word.
<code>\trspdfN</code>	Units for <b><code>\trspdlN</code></b> : 0 Null. Ignore <b><code>\trspdlN</code></b> . 3 Twips.
<code>\trspdfN</code>	Units for <b><code>\trspdtN</code></b> : 0 Null. Ignore <b><code>\trspdtN</code></b> . 3 Twips.

Control word	Meaning
<code>\trspdfbN</code>	Units for <code>\trspdbN</code> : 0 Null. Ignore <code>\trspdbN</code> . 3 Twips.
<code>\trspdrN</code>	Units for <code>\trspdrN</code> : 0 Null. Ignore <code>\trspdrN</code> . 3 Twips.
<code>\trwWidthN</code>	Preferred row width. Overrides <code>\trautofitN</code> .
<code>\trftsWidthN</code>	Units for <code>\clwWidthN</code> : 0 Null. Ignore <code>\trwWidth</code> in favor of <code>\cellx</code> (Word 97 style of determining cell and row width) 1 Auto, no preferred row width, ignores <code>\clwWidthN</code> if present; <code>\clwWidthN</code> will generally not be written, giving precedence to row defaults and autofit. 2 Percentage (in 50ths of a percent). 3 Twips.
<code>\trwWidthBN</code>	Width of invisible cell at the beginning of the row. Used only in cases where rows have different widths.
<code>\trftsWidthBN</code>	Units for <code>\clwWidthBN</code> : 0 Null. No invisible cell before. 1 Auto. ignores <code>\clwWidthBN</code> if present; <code>\clwWidthBN</code> will generally not be written. 2 Percentage (in 50ths of a percent). 3 Twips.
<code>\trwWidthAN</code>	Width of invisible cell at the end of the row. Used only when rows have different widths.
<code>\trftsWidthAN</code>	Units for <code>\clwWidthBN</code> : 0 Null. No invisible cell after. 1 Auto, ignores <code>\clwWidthBN</code> if present; <code>\clwWidthBN</code> will generally not be written. 2 Percentage (in 50ths of a percent). 3 Twips.
<b>Row Shading and Background Color</b>	
<code>\trcbpatN</code>	Background pattern color for the table row shading.
<code>\trcfpatN</code>	Foreground pattern color for the table row shading.
<code>\trpatN</code>	Pattern for table row shading.
<code>\trshdngN</code>	Percentage shading for table row shading.
<code>\trbgbdia</code>	<b>Backward diagonal pattern.</b>
<code>\trbgcross</code>	<b>Cross pattern.</b>
<code>\trbgdcross</code>	<b>Diagonal cross pattern.</b>
<code>\trbgdkbdia</code>	<b>Dark backward diagonal pattern.</b>
<code>\trbgdkcross</code>	<b>Dark cross pattern.</b>
<code>\trbgdkdcross</code>	<b>Dark diagonal cross pattern.</b>
<code>\trbgdkfdia</code>	<b>Dark forward diagonal pattern.</b>
<code>\trbgdkhor</code>	<b>Dark horizontal pattern.</b>
<code>\trbgdkvert</code>	<b>Dark vertical pattern.</b>
<code>\trbgfdia</code>	<b>Forward diagonal pattern.</b>
<code>\trbghoriz</code>	<b>Horizontal pattern.</b>
<code>\trbgvert</code>	Vertical pattern.

Control word	Meaning
<b>Cell Formatting</b>	
<code>\cFitText</code>	Fit text in cell, compressing each paragraph to the width of the cell.
<code>\cNoWrap</code>	Do not wrap text for the cell. Only has an effect if the table cell does not have a preferred <code>\clwWidthN</code> , which overrides <code>\trautofitN</code> .
<code>\clpadlN</code>	Left cell margin or padding. Overrides <code>\trpaddlN</code> .
<code>\clpadtN</code>	Top cell margin or padding. Overrides <code>\trpaddtN</code> .
<code>\clpadbN</code>	Bottom cell margin or padding. Overrides <code>\trpaddbN</code> .
<code>\clpadrN</code>	Right cell margin or padding. Overrides <code>\trpadrN</code> .
<code>\clpadflN</code>	Units for <code>\clpadlN</code> : 0 Null. Ignore <code>\clpadl</code> in favor of <code>\trgaph</code> (Word 97 style cell padding). 3 Twips.
<code>\clpadftN</code>	Units for <code>\clpadtN</code> : 0 Null. Ignore <code>\clpadt</code> in favor of <code>\trgaph</code> (Word 97 style cell padding). 3 Twips.
<code>\clpadfbN</code>	Units for <code>\clpadbN</code> : 0 Null. Ignore <code>\clpadb</code> in favor of <code>\trgaph</code> (Word 97 style cell padding). 3 Twips.
<code>\clpadfrN</code>	Units for <code>\clpadrN</code> : 0 Null. Ignore <code>\clpadr</code> in favor of <code>\trgaph</code> (Word 97 style cell padding). 3 Twips.
<code>\clwWidthN</code>	Preferred cell width. Overrides <code>\trautofitN</code> .
<code>\clftsWidthN</code>	Units for <code>\clwWidthN</code> : 0 Null. Ignore <code>\clwWidth</code> in favor of <code>\cellx</code> (Word 97 style of determining cell and row width). 1 Auto, no preferred cell width, ignores <code>\clwWidthN</code> if present; <code>\clwWidthN</code> will generally not be written, giving precedence to row defaults. 2 Percentage (in 50ths of a percent). 3 Twips.
<b>Positioned Wrapped Tables (The following properties must be the same for all rows in the table.)</b>	
<code>\tdfrmtxtLeftN</code>	Distance in twips, between the left of the table and surrounding text (the default is 0).
<code>\tdfrmtxtRightN</code>	Distance in twips, between the right of the table and surrounding text (the default is 0).
<code>\tdfrmtxtTopN</code>	Distance in twips, between the top of the table and surrounding text (the default is 0).
<code>\tdfrmtxtBottomN</code>	Distance in twips, between the bottom of the table and surrounding text (the default is 0).
<code>\tabsnoovrlp</code>	Do not allow the table to overlap with other tables or shapes with similar wrapping not contained within it.
<code>\tphcol</code>	Use the column as the horizontal reference frame. This is the default if no horizontal table positioning information is given.
<code>\tphmrg</code>	Use the margin as the horizontal reference frame.
<code>\tphpg</code>	Use the page as the horizontal reference frame.
<code>\tposnegxN</code>	Same as <code>\tposx</code> but allows arbitrary negative values.
<code>\tposnegyN</code>	Same as <code>\tposy</code> but allows arbitrary negative values.
<code>\tposxN</code>	Positions the table <b>N</b> twips from the left edge of the horizontal reference frame.
<code>\tposxc</code>	Centers the table within the horizontal reference frame.
<code>\tposxi</code>	Positions the table inside the horizontal reference frame.

Control word	Meaning
<code>\tposxl</code>	Positions the table at the left of the horizontal reference frame.
<code>\tposxo</code>	Positions the table outside the horizontal reference frame.
<code>\tposxr</code>	Positions the table at the right of the horizontal reference frame.
<code>\tposy</code>	Positions the table <b>N</b> twips from the top edge of the vertical reference frame.
<code>\tposyb</code>	Positions the table at the bottom of the vertical reference frame.
<code>\tposyc</code>	Centers the table within the vertical reference frame
<code>\tposyl</code>	Positions the table to be inline.
<code>\tposyin</code>	Positions the table inside within the vertical reference frame.
<code>\tposyout</code>	Positions the table outside within the vertical reference frame.
<code>\tposyt</code>	Positions the table at the top of the vertical reference frame.
<code>\tpvmrg</code>	Positions the table vertically relative to the top margin. This is the default if no vertical table positioning information is given.
<code>\tpvpara</code>	Positions the table vertically relative to the top left corner of the next unframed paragraph in the stream.
<code>\tpvpg</code>	Positions the table vertically relative to the top of the page.

#### Bidirectional Controls

<code>\rtlrow</code>	Cells in this table row will have right-to-left precedence.
<code>\ltrrow</code>	Cells in this table row will have left-to-right precedence (the default).

#### Row Borders

<code>\trbrdrt</code>	Table row border top.
<code>\trbrdrl</code>	Table row border left.
<code>\trbrdrb</code>	Table row border bottom.
<code>\trbrdrr</code>	Table row border right.
<code>\trbrdrh</code>	Table row border horizontal (inside).
<code>\trbrdrv</code>	Table row border vertical (inside).

#### Cell Borders

<code>\brdrnil</code>	No border specified.
<code>\clbrdrb</code>	Bottom table cell border.
<code>\clbrdrt</code>	Top table cell border.
<code>\clbrdrl</code>	Left table cell border.
<code>\clbrdrr</code>	Right table cell border.
<code>\cldglu</code>	Diagonal line (top left to bottom right).
<code>\cldgll</code>	Diagonal line (top right to bottom left).

#### Cell Shading and Background Pattern

<code>\clshdrawnil</code>	No shading specified.
<code>\clshdngN</code>	<b>N</b> is the shading of a table cell in hundredths of a percent. This control should be included in RTF along with cell border information.
<code>\clshdngrawN</code>	Same as <b>\clshdngN</b> for use with table styles.
<code>\clbghoriz</code>	Specifies a horizontal background pattern for the cell.
<code>\rawclbghoriz</code>	Same as <b>\clbghoriz</b> for use with table styles.
<code>\clbgvert</code>	Specifies a vertical background pattern for the cell.
<code>\rawclbgvert</code>	Same as <b>\clbgvert</b> for use with table styles.
<code>\clbgfdiag</code>	Specifies a forward diagonal background pattern for the cell (\\\\).

Control word	Meaning
\rawclbgfdiag	Same as <b>\clbgfdiag</b> for use with table styles.
\clbgbdiag	Specifies a backward diagonal background pattern for the cell (////).
\rawclbgbdiag	Same as <b>\clbgbdiag</b> for use with table styles.
\clbgcross	Specifies a cross background pattern for the cell.
\rawclbgcross	Same as <b>\clbgcross</b> for use with table styles.
\clbgdcross	Specifies a diagonal cross background pattern for the cell.
\rawclbgdcross	Same as <b>\clbgdcross</b> for use with table styles.
\clbgdkhor	Specifies a dark horizontal background pattern for the cell.
\rawclbgdkhor	Same as <b>\clbgdkhor</b> for use with table styles.
\clbgdkvert	Specifies a dark vertical background pattern for the cell.
\rawclbgdkvert	Same as <b>\clbgdkvert</b> for use with table styles.
\clbgdkfdiag	Specifies a dark forward diagonal background pattern for the cell (\\\\).
\rawclbgdkfdiag	Same as <b>\clbgdkfdiag</b> for use with table styles.
\clbgdkbdiag	Specifies a dark backward diagonal background pattern for the cell (\\\\/).
\rawclbgdkbdiag	Same as <b>\clbgdkbdiag</b> for use with table styles.
\clbgdkcross	Specifies a dark cross background pattern for the cell.
\rawclbgdkcross	Same as <b>\clbgdkcross</b> for use with table styles.
\clbgdkdcross	Specifies a dark diagonal cross background pattern for the cell.
\rawclbgdkdcross	Same as <b>\clbgdkdcross</b> for use with table styles.
\clcfpatN	<b>N</b> is the line color of the background pattern.
\clcfpatrawN	Same as <b>\clcfpatN</b> for use with table styles.
\clcbpatN	<b>N</b> is the background color of the background pattern.
\clcbpatrawN	Same as <b>\clcbpatN</b> for use with table styles.

#### Cell Vertical Text Alignment

\clvertalt	Text is top-aligned in cell (the default).
\clvertalc	Text is centered vertically in cell.
\clvertalb	Text is bottom-aligned in cell.


#### Cell Text Flow

\cltxlrtd	Text in a cell flows from left to right and top to bottom (default).
\cltxtbl	Text in a cell flows right to left and top to bottom.
\cltxbtlr	Text in a cell flows left to right and bottom to top.
\cltxlrbv	Text in a cell flows left to right and top to bottom, vertical.
\cltxtblrv	Text in a cell flows top to bottom and right to left, vertical.

## Example

The following is an example of a complex Word 2000 table created from RTF. It does not take account the table styles implemented in Word 2002 or Word 2003. The bitmap showing the table's formatting is followed by the actual RTF used to create it. Following this example display of RTF is an analysis of the control words and values used to create the table.

The image shows a freely positioned Word table, with two cells at an offset. Inside the topmost cell is a nested table. The table has green borders, yellow shading, a small amount of spacing between cells, and inner cell margins or padding.

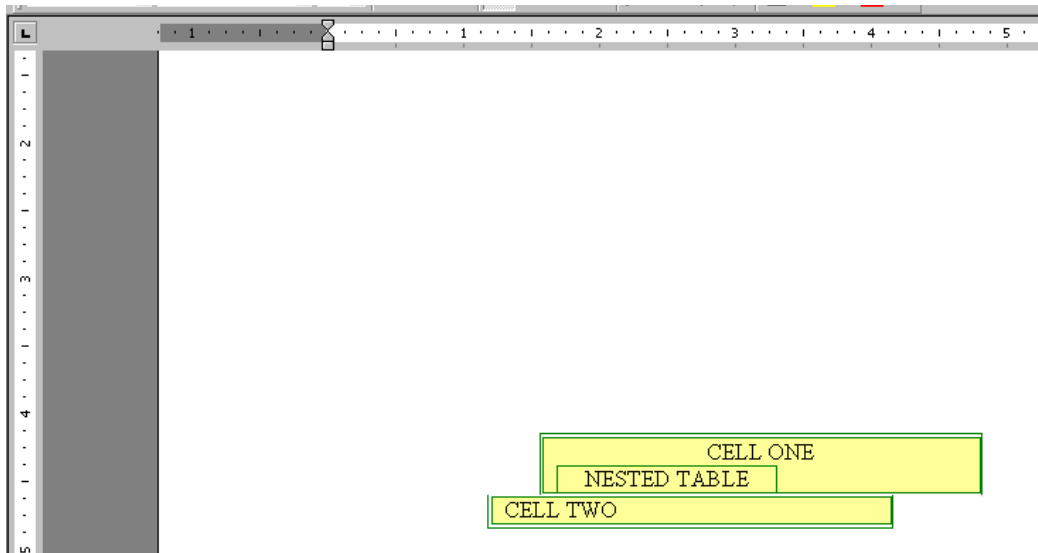

The following RTF was emitted by Word 2000. Word 2000 also emits RTF that older readers (such as previous versions of Word) can understand, so new features degrade nicely.

```
\trowd \trgaph115\trleft388\trbrdrtr\brdrs\brdrw15\brdrcf11
\trbrdr1\brdrs\brdrw15\brdrcf11 \trbrdrb\brdrs\brdrw15\brdrcf11
\trbrdr1\brdrs\brdrw15\brdrcf11
\trbrdrh\brdrs\brdrw15\brdrcf11 \trbrdrv\brdrs\brdrw15\brdrcf11
\
tphmrg\tposxc\tposyc\tdfrmtxtLeft187\tdfrmtxtRight187\trftsWidth1\trftsWidthB3\trwWi
dthB504\trftsWidthA3\trautoFit1\trspdl14\trspdt14\trspdb14\trspdr14\trspdf13\trspdf1
3\trspdfb3\trspdf13\trpaddl115\trpaddr115\trpaddf13\trpaddf13 \clvertalc\clbrdrtr
\brdrs\brdrw15\brdrcf11 \clbrdr1\brdrs\brdrw15\brdrcf11
\clbrdrb\brdrs\brdrw15\brdrcf11 \clbrdr1\brdrs\brdrw15\brdrcf11
\clcbpat17\cltxlrb\clftsWidth3\clwWidth4644 \cellx5074\pard\plain
\qc
\li0\ri0\widctlpar\intbl\phmrg\posxc\posyc\dxfrtext187\tdfrmtxtx187\tdfrmtxty0\aspalp
h\aspnum\faauto\adjustright\rin0\lin0
\fs24\lang1033\langfe2052\loch\af0\hich\af0\dbch\af17\cgrid\langnp1033\langfenp2052
{\hich\af0\dbch\af17\loch\af0 CELL ONE
\par }\pard \qc
\li0\ri0\widctlpar\intbl\phmrg\posxc\posyc\dxfrtext187\tdfrmtxtx187\tdfrmtxty0\aspalp
h\aspnum\faauto\adjustright\rin0\lin0\itap2 {\hich\af0\dbch\af17\loch\af0 NESTED
TABLE\nestcell{\nonesttables
\par }}\pard \ql
\li0\ri0\widctlpar\intbl\aspalpha\aspnum\faauto\adjustright\rin0\lin0\itap2
{{\*\nesttableprops\trowd \trgaph108\trleft8\trbrdrtr\brdrs\brdrw15\brdrcf11
\trbrdr1\brdrs\brdrw15\brdrcf11 \trbrdrb\brdrs\brdrw15\brdrcf11 \trbrdr1
```

\brdrs\brdrw15\brdrcf11 \trbrdrh\brdrs\brdrw15\brdrcf11  
\trbrdrv\brdrs\brdrw15\brdrcf11  
\trftsWidth1\trautofit1\trpaddl108\trpaddr108\trpaddf13\trpaddfr3  
\clvertalt\clbrdrt\brdrs\brdrw15\brdrcf11 \clbrdrl\brdrs\brdrw15\brdrcf11 \clbrdrb  
\brdrs\brdrw15\brdrcf11 \clbrdrr\brdrs\brdrw15\brdrcf11  
\cltxlrb\clftsWidth3\clwWidth2340 \cellx2348\nestrow}{\nonesttables  
\par }}\trowd \trgaph115\trleft388\trbrdrt\brdrs\brdrw15\brdrcf11  
\trbrdrl\brdrs\brdrw15\brdrcf11 \trbrdrb\brdrs\brdrw15\brdrcf11  
\trbrdrr\brdrs\brdrw15\brdrcf11 \trbrdrh\brdrs\brdrw15\brdrcf11  
\trbrdrv\brdrs\brdrw15\brdrcf11  
\  
tphmrg\tposxc\tposyc\tdfrmtxtLeft187\tdfrmtxtRight187\trftsWidth1\trftsWidthB3\trwWidthB504\trftsWidthA3\trautofit1\trspd114\trspdt14\trspdb14\trspdr14\trspdf13\trspdf3\trspdfb3\trspdf3\trpaddl115\trpaddr115\trpaddf13\trpaddfr3 \clvertalc\clbrdrt  
\brdrs\brdrw15\brdrcf11 \clbrdrl\brdrs\brdrw15\brdrcf11  
\clbrdrb\brdrs\brdrw15\brdrcf11 \clbrdrr\brdrs\brdrw15\brdrcf11  
\clcbpat17\cltxlrb\clftsWidth3\clwWidth4644 \cellx5074\pard  
\qc  
\li0\ri0\widctlpar\intbl\phmrg\posxc\posyc\dxfrtext187\tdfrmtxtx187\tdfrmtxty0\aspalpha\aspnum\faauto\adjustright\rin0\lin0 {\cell } \pard \ql  
\li0\ri0\widctlpar\intbl\aspalpha\aspnum\faauto\adjustright\rin0\lin0 {\trowd  
\trgaph115\trleft388\trbrdrt  
\brdrs\brdrw15\brdrcf11 \trbrdrl\brdrs\brdrw15\brdrcf11  
\trbrdrb\brdrs\brdrw15\brdrcf11 \trbrdrr\brdrs\brdrw15\brdrcf11  
\trbrdrh\brdrs\brdrw15\brdrcf11 \trbrdrv\brdrs\brdrw15\brdrcf11  
\  
tphmrg\tposxc\tposyc\tdfrmtxtLeft187\tdfrmtxtRight187\trftsWidth1\trftsWidthB3\trwWidthB504\trftsWidthA3\trautofit1\trspd114\trspdt14\trspdb14\trspdr14\trspdf13\trspdf3\trspdfb3\trspdf3\trpaddl115\trpaddr115\trpaddf13\trpaddfr3 \clvertalc\clbrdrt  
\brdrs\brdrw15\brdrcf11 \clbrdrl\brdrs\brdrw15\brdrcf11  
\clbrdrb\brdrs\brdrw15\brdrcf11 \clbrdrr\brdrs\brdrw15\brdrcf11  
\clcbpat17\cltxlrb\clftsWidth3\clwWidth4644 \cellx5074\row } \trowd  
\trgaph115\trleft-158\trbrdrt\brdrs\brdrw15\brdrcf11 \trbrdrl  
\brdrs\brdrw15\brdrcf11 \trbrdrb\brdrs\brdrw15\brdrcf11  
\trbrdrr\brdrs\brdrw15\brdrcf11 \trbrdrh\brdrs\brdrw15\brdrcf11  
\trbrdrv\brdrs\brdrw15\brdrcf11  
\  
tphmrg\tposxc\tposyc\tdfrmtxtLeft187\tdfrmtxtRight187\trftsWidth1\trftsWidthB3\trftsWidthA3\trwWidthA900\trautofit1\trspd114\trspdt14\trspdb14\trspdr14\trspdf13\trspdf3\trspdfb3\trspdf3\trpaddl115\trpaddr115\trpaddf13\trpaddfr3 \clvertalt\clbrdrt

```

\brdrs\brdrw15\brdrcf11 \clbrdrl\brdrs\brdrw15\brdrcf11
\clbrdrb\brdrs\brdrw15\brdrcf11 \clbrdrr\brdrs\brdrw15\brdrcf11
\clcbpat17\cltxlrb\clftsWidth3\clwWidth4248 \cellx4132\pard
\ql
\li0\ri0\widctlpar\intbl\phmrg\posxc\posyc\dxfrtext187\dfmrtxtx187\dfmrtxtty0\aspalph
a\aspnum\faauto\adjustright\rin0\lin0 {\hich\af0\dbch\af17\loch\f0 CELL
TWO\cell } \pard \ql
\li0\ri0\widctlpar\intbl\aspalpha\aspnum\faauto\adjustright\rin0\lin0 {
\trowd \trgaph115\trleft-158\trbrdrt\brdrs\brdrw15\brdrcf11
\trbrdrl\brdrs\brdrw15\brdrcf11 \trbrdrb\brdrs\brdrw15\brdrcf11
\trbrdrr\brdrs\brdrw15\brdrcf11 \trbrdrh\brdrs\brdrw15\brdrcf11
\trbrdrv\brdrs\brdrw15\brdrcf11
\
tphmrg\tposxc\tposyc\tdfmrtextLeft187\tdfmrtextRight187\trftsWidth1\trftsWidthB3\trfts
WidthA3\trwWidthA900\trautofit1\trspd114\trspdt14\trspdb14\trspdr14\trspdf13\trspdf1
3\trspdfb3\trspdf3\trpadd115\trpaddr115\trpaddf13\trpaddf3 \clvertalt\clbrdrt
\brdrs\brdrw15\brdrcf11 \clbrdrl\brdrs\brdrw15\brdrcf11 \clbrdrb\brdrs\brdrw15\brdrcf11
\clbrdrr\brdrs\brdrw15\brdrcf11 \clcbpat17\cltxlrb\clftsWidth3\clwWidth4248 \cellx4132\row }

```

The following is an analysis of the preceding RTF. It has been restructured for ease of explanation. All text in red are comments. The topmost cell is cell 1 (inside row 1). The bottom cell is cell 2 (inside row 2).

Begin table row defaults for row 1.

```

\trowd

\trgaph115
\trleft388

```

Row borders

```

\trbrdrt\brdrs\brdrw15\brdrcf11 \trbrdrl\brdrs\brdrw15\brdrcf11
\trbrdrb\brdrs\brdrw15\brdrcf11 \trbrdrr\brdrs\brdrw15\brdrcf11
\trbrdrh\brdrs\brdrw15\brdrcf11 \trbrdrv\brdrs\brdrw15\brdrcf11

```

Absolute positioning of the table. All rows should have the same positioning.

```

\tpmrg\tposxc\tposyc\tdfmrtextLeft187\tdfmrtextRight187

```

Width of invisible cell before cell one (to simulate offset)

```

\trftsWidth1\trftsWidthB3\trwWidthB504\trftsWidthA3

```



Autofit is on.

\trautofit1

Default cell spacing for the row

\trspdl14\trspdt14\trspdb14\trspdr14\trspdf13\trspdft3\trspdfb3\trspdfr3\trpaddl115\trpaddr115\trpaddf13\trpaddfr3

Cell 1 definition begins.

Vertical alignment of contents

\clvertalc

Cell borders

\clbrdrt\brdrs\brdrw15\brdrcf11 \clbrdrl\brdrs\brdrw15\brdrcf11  
\clbrdrb\brdrs\brdrw15\brdrcf11 \clbrdrr\brdrs\brdrw15\brdrcf11

Cell shading

\clcbpat17

Cell text flow

\cltxlrtd

Cell width, using new properties and old ones

\clftsWidth3\clwWidth4644 \cellx5074

Text for cell 1 begins here. Includes paragraph absolute positioning equivalent to the table absolute positioning above so that old readers get it right.

\pard\plain \qc  
\li0\ri0\widctlpar\intbl\phmrg\posxc\posyc\dxfrtext187\dfmrtextx187\dfmrtexty0\aspalpha\aspnum\faauto\adjustright\rin0\lin0  
\fs24\lang1033\langfe2052\loch\af0\hich\af0\dbch\af17\cgrid\langnp1033\langfenp2052  
{\hich\af0\dbch\af17\loch\af0 CELL ONE  
\par }

Begin definition of nested table inside cell 1.

```
\pard \qc
\li0\ri0\widctlpar\intbl\phmrg\posxc\posyc\dxfrtext187\dfmrtxtx187\dfmrtxty0\aspalph
a\aspnum\faauto\adjustright\rin0\lin0
```

Notice itap is set to 2, indicating second nesting level.

```
\itap2
```

Nested cell ends with a \nestcell and is followed by a paragraph mark inside a \nonesttables destination, which is only read by readers that do not understand nested tables. This way the text in the nested table is in its own paragraph.

```
{\high\af0\dbch\af17\loch\f0 NESTED TABLE\nestcell{\nonesttables
\par }}\pard \ql
\li0\ri0\widctlpar\intbl\aspalpha\aspnum\faauto\adjustright\rin0\lin0\itap2
```

Nested table properties occur after the text for the nested cell.

```
{{\*\nesttableprops\trowd \trgaph108\trleft8\trbrdrt\brdrs\brdrw15\brdrcf11
\trbrdrl\brdrs\brdrw15\brdrcf11 \trbrdrb\brdrs\brdrw15\brdrcf11 \trbrdr
\brdrs\brdrw15\brdrcf11 \trbrdrh\brdrs\brdrw15\brdrcf11
\trbrdrv\brdrs\brdrw15\brdrcf11
\trftsWidth1\trautofit1\trpaddl108\trpaddr108\trpaddf13\trpaddfr3
\clvertalt\clbrdrt\brdrs\brdrw15\brdrcf11 \clbrdrl\brdrs\brdrw15\brdrcf11 \clbrdrb
\brdrs\brdrw15\brdrcf11 \clbrdrh\brdrs\brdrw15\brdrcf11
\clbrdrv\brdrs\brdrw15\brdrcf11
\cltxlrtb\clftsWidth3\clwWidth2340 \cellx2348\nestrow}{\nonesttables
\par }}
```

End of nested table properties

Set the default for the row again after nested table! We're still in the first row, and this repeats what was written in the beginning of the row. Defaults of the table are reset and the cell is closed with a \cell.

```
\trowd \trgaph115\trleft388\trbrdrt\brdrs\brdrw15\brdrcf11
\trbrdrl\brdrs\brdrw15\brdrcf11 \trbrdrb\brdrs\brdrw15\brdrcf11
\trbrdrh\brdrs\brdrw15\brdrcf11 \trbrdrv\brdrs\brdrw15\brdrcf11
\
tphmrg\tposxc\tposyc\tdfrmtxtLeft187\tdfrmtxtRight187\trftsWidth1\trftsWidthB3\trWid
dthB504\trftsWidthA3\trautofit1\trspdl14\trspdt14\trspdb14\trspdr14\trspdf13\trspdf1
3\trspdfb3\trspdf3\trpaddl115\trpaddr115\trpaddf13\trpaddfr3 \clvertalc\clbrdrt
\brdrs\brdrw15\brdrcf11 \clbrdrl\brdrs\brdrw15\brdrcf11
\clbrdrb\brdrs\brdrw15\brdrcf11 \clbrdrh\brdrs\brdrw15\brdrcf11
\clcbpat17\cltxlrtb\clftsWidth3\clwWidth4644 \cellx5074\pard
```



Cell 2 text

\pard

\ql


\li0\ri0\widctlpar\intbl\phmrg\posxc\posyc\dxfrtext187\dfmrtxtx187\dfmrtxty0\aspalpha\aspnum\faauto\adjustright\rin0\lin0 {\hich\af0\dbch\af17\loch\f0 CELL TWO\cell } \pard \ql  
\li0\ri0\widctlpar\intbl\aspalpha\aspnum\faauto\adjustright\rin0\lin0

End cell 2 text

Now the row ends, repeating the defaults of the row at the end of it!

{\trowd \trgaph115\trleft-158\trbrdrt\brdrs\brdrw15\brdrcf11  
\trbrdrl\brdrs\brdrw15\brdrcf11 \trbrdrb\brdrs\brdrw15\brdrcf11  
\trbrdrr\brdrs\brdrw15\brdrcf11 \trbrdrh\brdrs\brdrw15\brdrcf11  
\trbrdrv\brdrs\brdrw15\brdrcf11  
\brdrw15\brdrcf11  
tphmrg\tposxc\tposyc\tdfrmtxtLeft187\tdfrmtxtRight187\trftsWidth1\trftsWidthB3\trftsWidthA3\trwWidthA900\trautofit1\trspdl14\trspdt14\trspdb14\trspdr14\trspdf13\trspdf13\trspdfb3\trspdf3\trpaddl115\trpaddr115\trpaddf13\trpaddf3 \clvertalt\clbrdrt  
\brdrs\brdrw15\brdrcf11 \clbrdrl\brdrs\brdrw15\brdrcf11  
\clbrdrb\brdrs\brdrw15\brdrcf11 \clbrdrr\brdrs\brdrw15\brdrcf11  
\clcbpat17\cltxlrb\clftsWidth3\clwWidth4248 \cellx4132\row }  
END OF ROW TWO

## Table Styles Example

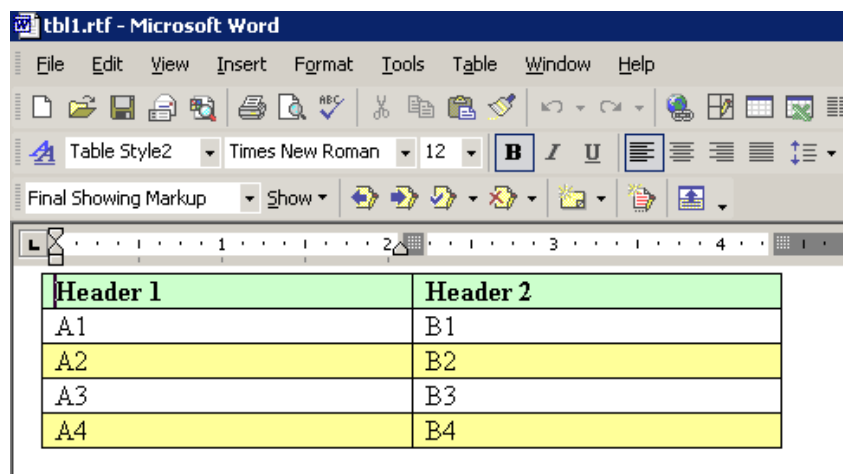

Header 1	Header 2
A1	B1
A2	B2
A3	B3
A4	B4

Here is the stylesheet with one table style highlighted. Note that a single table style can have multiple entries.

**\ts11** is the default table style. This style gives the first row a fill color and font attributes. Every subsequent odd row is filled with pale yellow.

```
{\stylesheet{\ql
\li0\ri0\widctlpar\aspalpha\aspnum\faauto\adjustright\rin0\lin0\itap0
\fs24\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 \snext0 Normal;}{\*\cs10
\additive \ssemihidden Default Paragraph Font;}
{\*\ts11\tsrowd\trftsWidthB3\trpaddl108\trpaddr108\trpaddfl3\trpaddft3\trpaddfb3\trp
addfr3\tscellwidthfts0\tsvertalt\tsbrdr\tsbrdr\tsbrdrb\tsbrdr\tsbrdrdgl\tsbrdrdgr
\tsbrdrh\tsbrdrv \ql
\li0\ri0\widctlpar\aspalpha\aspnum\faauto\adjustright\rin0\lin0\itap0
\fs20\lang1024\langfe1024\cgrid\langnp1024\langfenp1024 \snext11 \ssemihidden Normal
Table;}{\*\ts15\tsrowd\trbrdr\brdrs\brdrw10 \trbrdr\brdrs\brdrw10
\trbrdrb\brdrs\brdrw10 \trbrdr\brdrs\brdrw10 \trbrdrh\brdrs\brdrw10
\trbrdrv\brdrs\brdrw10
\trftsWidthB3\trpaddl108\trpaddr108\trpaddfl3\trpaddft3\trpaddfb3\trpaddfr3\tscellwi
dthfts0\tsvertalt\tsbrdr\tsbrdr\tsbrdrb\tsbrdr\tsbrdrdgl\tsbrdrdgr\tsbrdrh\tsbrdr
v \ql \li0\ri0\widctlpar\aspalpha\aspnum\faauto\adjustright\rin0\lin0\itap0
\fs20\lang1024\langfe1024\cgrid\langnp1024\langfenp1024 \sbasedon11 \snext15
\styrsid353782 Table Grid;}{\*\ts16\tsrowd\trbrdr\brdrs\brdrw15\brdr\brdr
\trbrdr\brdrs\brdrw15\brdr\brdr
\trbrdrb\brdrs\brdrw15\brdr\brdr \trbrdr\brdrs\brdrw15\brdr\brdr
\trbrdrv\brdrs\brdrw15\brdr\brdr
\trftsWidthB3\trpaddl108\trpaddr108\trpaddfl3\trpaddft3\trpaddfb3\trpaddfr3\tsbands
h1\tscellwidthfts0\tsvertalt\tsbrdr\tsbrdr\tsbrdrb\tsbrdr\tsbrdrdgl\tsbrdrdgr\tsb
rdrh\tsbrdrv \ql
\li0\ri0\widctlpar\aspalpha\aspnum\faauto\adjustright\rin0\lin0\itap0
\fs20\lang1024\langfe1024\cgrid\langnp1024\langfenp1024 \sbasedon11 \snext16
\styrsid353782 Table List 8;}
{\*\ts16\tsrowd\tscellcfpat7\tscellcbpat8\tscellpct10000\tsbrdrb\brdrs\brdrw15\brdr
f1 \tsbrdrdgl\brdrnil\tsbrdrdgr\brdrnil \b\i \tsfirstrow Table List 8;}
{\*\ts16\tsrowd\tsbrdr\brdrs\brdrw15\brdr\brdr
\tsbrdrdgl\brdrnil\tsbrdrdgr\brdrnil \b \tsclastrow Table List 8;}
{\*\ts16\tsrowd\tsbrdrdgl\brdrnil\tsbrdrdgr\brdrnil \b \tsfirstcol Table List 8;}
{\*\ts16\tsrowd\tsbrdrdgl\brdrnil\tsbrdrdgr\brdrnil \b \tsclastcol Table List 8;}
{\*\ts16\tsrowd\tscellcfpat7\tscellcbpat8\tscellpct2500\tsbrdrdgl\brdrnil\tsbrdrdgr\
brdrnil \cf0 \tsbandhorzodd Table List 8;}
{\*\ts16\tsrowd\tscellcfpat6\tscellcbpat8\tscellpct5000\tsbrdrdgl\brdrnil\tsbrdrdgr\
brdrnil \tsbandhorzeven Table List 8;}{\*\ts17\tsrowd\trbrdr\brdrs\brdrw10
\trbrdr\brdrs\brdrw10 \trbrdrb\brdrs\brdrw10 \trbrdr\brdrs\brdrw10
\trbrdrh\brdrs\brdrw10 \trbrdrv\brdrs\brdrw10
\trftsWidthB3\trpaddl108\trpaddr108\trpaddfl3\trpaddft3\trpaddfb3\trpaddfr3\tsbands
h1\tscellwidthfts0\tsvertalc\tsbrdr\tsbrdr\tsbrdrb\tsbrdr\tsbrdrdgl\tsbrdrdgr\tsb
rdrh\tsbrdrv \qr
\li0\ri0\widctlpar\aspalpha\aspnum\faauto\adjustright\rin0\lin0\itap0
\fs20\lang1024\langfe1024\cgrid\langnp1024\langfenp1024 \sbasedon15 \snext17
\styrsid353782 Table Style1;}
```

```

{\*\ts17\tsrowd\tsvertalc\tsellcfpat0\tsellcbpat17\tsellpct0 \qc \f36\fs22
\tsfirstrow Table Style1;}{\*\ts17\tsrowd\tsvertalt \qr \tsclastrow Table Style1;}
{\*\ts17\tsrowd \ql \f36\fs18 \tsfirstcol Table Style1;}
{\*\ts17\tsrowd\tsellcfpat0\tsellcbpat18\tsellpct0 \tsbandhorzodd Table Style1;}
{\*\ts17\tsrowd \b\f36\fs20 \tsccell Table Style1;}
{\*\ts18\tsrowd\trbrdrt\brdrs\brdrw10 \trbrdrl\brdrs\brdrw10
\trbrdrb\brdrs\brdrw10 \trbrdrr\brdrs\brdrw10 \trbrdrh\brdrs\brdrw10
\trbrdrv\brdrs\brdrw10
\trftsWidthB3\trpaddl108\trpaddr108\trpaddf13\trpaddft3\trpaddfb3\trpaddfr3\tsbands
h1\tsellwidthfts0\tsvertalt\tsbrdrt\tsbrdrl\tsbrdrb\tsbrdrr\tsbrdrdgl\tsbrdrdgr\tsb
rdrh\tsbrdrv \ql
\li0\ri0\widctlpar\aspalpha\aspnum\faauto\adjustright\rin0\lin0\itap0
\fs20\lang1024\langfe1024\cgrid\langnp1024\langfenp1024 \sbasedon15 \snext18
\styrsid353782 Table Style2;}
{\*\ts18\tsrowd\tsellcfpat0\tsellcbpat17\tsellpct0 \b \tsfirstrow Table Style2;}
{\*\ts18\tsrowd\tsellcfpat0\tsellcbpat18\tsellpct0 \tsbandhorzeven Table
Style2;}}

```

## Table RTF

Most of this has been explained in the preceding example, so only some of the changes in Word 2002 have been highlighted.

```

\trowd \irow0\irowband-1\ts18\trgaph108\trleft-108\trbrdrt\brdrs\brdrw10
\trbrdrl\brdrs\brdrw10 \trbrdrb\brdrs\brdrw10 \trbrdrr\brdrs\brdrw10
\trbrdrh\brdrs\brdrw10 \trbrdrv\brdrs\brdrw10
\trftsWidth1\trftsWidthB3\trftsWidthA3\trautofit1\trpaddl108\trpaddr108\trpaddf13\tr
paddft3\trpaddfb3\trpaddfr3\tsbandsh1\tbl1khdrrows\tbl1klastrow\tbl1khdrcols\tbl1kl
astcol \clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10
\clcbpat17\cltxlrb\clftsWidth3\clwWidth3208\clcbpatraw17
\cellx3100\clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10
\clcbpat17\cltxlrb\clftsWidth3\clwWidth3207\clcbpatraw17 \cellx6307\pard\plain
\ql
\li0\ri0\widctlpar\intbl\aspalpha\aspnum\faauto\adjustright\rin0\lin0\tsfirstrow\yt
s18 \b\fs24\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 {\insrsid353782 Header
1\cell }\pard\plain \ql
\li0\ri0\widctlpar\intbl\aspalpha\aspnum\faauto\adjustright\rin0\lin0\tsfirstrow\yt
s18 \b\fs24\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 {\insrsid353782 Header
2\cell }\pard\plain \ql
\li0\ri0\widctlpar\intbl\aspalpha\aspnum\faauto\adjustright\rin0\lin0
\fs24\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 {\insrsid353782 \trowd
\irow0\irowband-1 \ts18\trgaph108\trleft-108\trbrdrt\brdrs\brdrw10
\trbrdrl\brdrs\brdrw10 \trbrdrb\brdrs\brdrw10 \trbrdrr\brdrs\brdrw10

```

\trbrdrh\brdrs\brdrw10 \trbrdrv\brdrs\brdrw10  
\trftsWidth1\trftsWidthB3\trftsWidthA3\trautofit1\trpaddl108\trpaddr108\trpaddf13\tr  
paddft3\trpaddfb3\trpaddfr3\tscbandsh1\tbllkhdrrows\tbllklastrow\tbllkhdrcols\tbllkl  
astcol \clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10  
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10  
\clcbpat17\cltxlrb\clftsWidth3\clwWidth3208\clcbpatraw17  
\cellx3100\clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10  
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10  
\clcbpat17\cltxlrb\clftsWidth3\clwWidth3207\clcbpatraw17 \cellx6307\row }\trowd  
\irow1\irowband0\ts18\trgaph108\trleft-108\trbrdrt\brdrs\brdrw10  
\trbrdrl\brdrs\brdrw10 \trbrdrb\brdrs\brdrw10 \trbrdrr\brdrs\brdrw10  
\trbrdrh\brdrs\brdrw10 \trbrdrv\brdrs\brdrw10  
\trftsWidth1\trftsWidthB3\trftsWidthA3\trautofit1\trpaddl108\trpaddr108\trpaddf13\tr  
paddft3\trpaddfb3\trpaddfr3\tscbandsh1\tbllkhdrrows\tbllklastrow\tbllkhdrcols\tbllkl  
astcol \clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10  
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10  
\cltxlrb\clftsWidth3\clwWidth3208\clshdrawnil  
\cellx3100\clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10  
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10  
\cltxlrb\clftsWidth3\clwWidth3207\clshdrawnil \cellx6307\pard\plain \ql  
\li0\ri0\widctlpar\intbl\aspalpha\aspnum\faauto\adjustright\rin0\lin0\yts18  
\fs24\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 {\insrsid353782 A1\cell  
B1\cell }\pard\plain \ql  
\li0\ri0\widctlpar\intbl\aspalpha\aspnum\faauto\adjustright\rin0\lin0  
\fs24\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 {\insrsid353782 \trowd  
\irow1\irowband0\ts18\trgaph108\trleft-108\trbrdrt\brdrs\brdrw10  
\trbrdrl\brdrs\brdrw10 \trbrdrb\brdrs\brdrw10 \trbrdrr\brdrs\brdrw10  
\trbrdrh\brdrs\brdrw10 \trbrdrv\brdrs\brdrw10  
\trftsWidth1\trftsWidthB3\trftsWidthA3\trautofit1\trpaddl108\trpaddr108\trpaddf13\tr  
paddft3\trpaddfb3\trpaddfr3\tscbandsh1\tbllkhdrrows\tbllklastrow\tbllkhdrcols\tbllkl  
astcol \clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10  
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10  
\cltxlrb\clftsWidth3\clwWidth3208\clshdrawnil  
\cellx3100\clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10  
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10  
\cltxlrb\clftsWidth3\clwWidth3207\clshdrawnil \cellx6307\row }\trowd  
\irow2\irowband1\ts18\trgaph108\trleft-108\trbrdrt\brdrs\brdrw10  
\trbrdrl\brdrs\brdrw10 \trbrdrb\brdrs\brdrw10 \trbrdrr\brdrs\brdrw10  
\trbrdrh\brdrs\brdrw10 \trbrdrv\brdrs\brdrw10  
\trftsWidth1\trftsWidthB3\trftsWidthA3\trautofit1\trpaddl108\trpaddr108\trpaddf13\tr  
paddft3\trpaddfb3\trpaddfr3\tscbandsh1\tbllkhdrrows\tbllklastrow\tbllkhdrcols\tbllkl  
astcol \clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10  
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10  
\clcbpat18\cltxlrb\clftsWidth3\clwWidth3208\clcbpatraw18

```

\cellx3100\clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10
\clcbpat18\cltxlrb\clftsWidth3\clwWidth3207\clcbpatraw18 \cellx6307\pard\plain
\ql
\li0\ri0\widctlpar\intbl\aspalpha\aspnum\faauto\adjustright\rin0\lin0\tscbandhorzeve
n\yts18 \fs24\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 {\insrsid353782
A2\cell }\pard\plain \ql
\li0\ri0\widctlpar\intbl\aspalpha\aspnum\faauto\adjustright\rin0\lin0\tscbandhorzeve
n\yts18 \fs24\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 {\insrsid353782
B2\cell }\pard\plain \ql
\li0\ri0\widctlpar\intbl\aspalpha\aspnum\faauto\adjustright\rin0\lin0
\fs24\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 {\insrsid353782 \trowd
\irow2\irowband1\ts18\trgaph108\trleft-108\trbrdrt\brdrs\brdrw10
\trbrdrl\brdrs\brdrw10 \trbrdrb\brdrs\brdrw10 \trbrdrr\brdrs\brdrw10
\trbrdrh\brdrs\brdrw10 \trbrdrv\brdrs\brdrw10
\trftsWidth1\trftsWidthB3\trftsWidthA3\trautofit1\trpaddl108\trpaddr108\trpaddf13\tr
paddft3\trpaddfb3\trpaddfr3\tscbandsh1\tbl1khdrrows\tbl1klastrow\tbl1khdrcols\tbl1kl
astcol \clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10
\clcbpat18\cltxlrb\clftsWidth3\clwWidth3208\clcbpatraw18
\cellx3100\clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10
\clcbpat18\cltxlrb\clftsWidth3\clwWidth3207\clcbpatraw18 \cellx6307\row }\trowd
\irow3\irowband2\ts18\trgaph108\trleft-108\trbrdrt\brdrs\brdrw10
\trbrdrl\brdrs\brdrw10 \trbrdrb\brdrs\brdrw10 \trbrdrr\brdrs\brdrw10
\trbrdrh\brdrs\brdrw10 \trbrdrv\brdrs\brdrw10
\trftsWidth1\trftsWidthB3\trftsWidthA3\trautofit1\trpaddl108\trpaddr108\trpaddf13\tr
paddft3\trpaddfb3\trpaddfr3\tscbandsh1\tbl1khdrrows\tbl1klastrow\tbl1khdrcols\tbl1kl
astcol \clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10
\cltxlrb\clftsWidth3\clwWidth3208\clshdrawnil
\cellx3100\clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10
\cltxlrb\clftsWidth3\clwWidth3207\clshdrawnil \cellx6307\pard\plain \ql
\li0\ri0\widctlpar\intbl\aspalpha\aspnum\faauto\adjustright\rin0\lin0\yts18
\fs24\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 {\insrsid353782 A3\cell
B3\cell }\pard\plain \ql
\li0\ri0\widctlpar\intbl\aspalpha\aspnum\faauto\adjustright\rin0\lin0
\fs24\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 {\insrsid353782 \trowd
\irow3\irowband2\ts18\trgaph108\trleft-108\trbrdrt\brdrs\brdrw10
\trbrdrl\brdrs\brdrw10 \trbrdrb\brdrs\brdrw10 \trbrdrr\brdrs\brdrw10
\trbrdrh\brdrs\brdrw10 \trbrdrv\brdrs\brdrw10
\trftsWidth1\trftsWidthB3\trftsWidthA3\trautofit1\trpaddl108\trpaddr108\trpaddf13\tr
paddft3\trpaddfb3\trpaddfr3\tscbandsh1\tbl1khdrrows\tbl1klastrow\tbl1khdrcols\tbl1kl

```



```

astcol \clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10
\cltxlrb\clftsWidth3\clwWidth3208\clshdrawnil
\cellx3100\clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10
\cltxlrb\clftsWidth3\clwWidth3207\clshdrawnil \cellx6307\row }\trowd
\irow4\irowband3\lastrow \ts18\trgaph108\trleft-108\trbrdrt\brdrs\brdrw10
\trbrdrl\brdrs\brdrw10 \trbrdrb\brdrs\brdrw10 \trbrdrr\brdrs\brdrw10
\trbrdrh\brdrs\brdrw10 \trbrdrv\brdrs\brdrw10
\trftsWidth1\trftsWidthB3\trftsWidthA3\trautofit1\trpaddl108\trpaddr108\trpaddf13\tr
paddft3\trpaddfb3\trpaddfr3\tscbandsh1\tb1lkhdrrows\tb1lklastrow\tb1lkhdrcols\tb1lk1
astcol \clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10
\clcbpat18\cltxlrb\clftsWidth3\clwWidth3208\clcbpatraw18
\cellx3100\clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10
\clcbpat18\cltxlrb\clftsWidth3\clwWidth3207\clcbpatraw18 \cellx6307\pard\plain
\ql
\li0\ri0\widctlpar\intbl\aspalpha\aspnum\faauto\adjustright\rin0\lin0\tscbandhorzeve
n\yts18 \fs24\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 {\insrsid353782
A4\cell }\pard\plain \ql
\li0\ri0\widctlpar\intbl\aspalpha\aspnum\faauto\adjustright\rin0\lin0\tscbandhorzeve
n\yts18 \fs24\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 {\insrsid353782
B4\cell }\pard\plain \ql
\li0\ri0\widctlpar\intbl\aspalpha\aspnum\faauto\adjustright\rin0\lin0
\fs24\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 {\insrsid353782 \trowd
\irow4\irowband3\lastrow \ts18\trgaph108\trleft-108\trbrdrt\brdrs\brdrw10
\trbrdrl\brdrs\brdrw10 \trbrdrb\brdrs\brdrw10 \trbrdrr\brdrs\brdrw10
\trbrdrh\brdrs\brdrw10 \trbrdrv\brdrs\brdrw10
\trftsWidth1\trftsWidthB3\trftsWidthA3\trautofit1\trpaddl108\trpaddr108\trpaddf13\tr
paddft3\trpaddfb3\trpaddfr3\tscbandsh1\tb1lkhdrrows\tb1lklastrow\tb1lkhdrcols\tb1lk1
astcol \clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10
\clcbpat18\cltxlrb\clftsWidth3\clwWidth3208\clcbpatraw18
\cellx3100\clvertalt\clbrdrt\brdrs\brdrw10 \clbrdrl\brdrs\brdrw10
\clbrdrb\brdrs\brdrw10 \clbrdrr\brdrs\brdrw10
\clcbpat18\cltxlrb\clftsWidth3\clwWidth3207\clcbpatraw18 \cellx6307\row }\pard
\ql \li0\ri0\widctlpar\aspalpha\aspnum\faauto\adjustright\rin0\lin0\itap0
{\insrsid14034704 \par }

```

## Character Text

Character text has the following syntax:

```

<char>          <ptext> | <atext> | '{' <char> '}'
<ptext>         (<chrfmt>* <data>+ )+

```

<data> #PCDATA | <spec> | <pict> | <obj> | <do> | <foot> | <annot> | <field> | <idx> | <toc> | <book>

### Font (Character) Formatting Properties

These control words (described as <chrfmt> in the syntax description) change font (character) formatting properties. A control word preceding plain text turns on the specified attribute. Some control words (indicated in the following table by an asterisk following the description) can be turned off by appending 0 to the control word. For example, **\b** turns on bold, while **\b0** turns off bold.

The font (character) formatting control words are listed in the following table.

Control word	Meaning
<code>\plain</code>	Reset font (character) formatting properties to a default value defined by the application (for example, bold, underline and italic are disabled; font size is reset to 12 point). The associated font (character) formatting properties (described in the section <a href="#">Associated Character Properties</a> of this Specification) are also reset.
<code>\animtext</code> <i>N</i>	Animated text properties: <ol style="list-style-type: none"> <li>1 Las Vegas Lights</li> <li>2 Blinking Background</li> <li>3 Sparkle Text</li> <li>4 Marching Black Ants</li> <li>5 Marching Red Ants</li> <li>6 Shimmer</li> </ol>
<code>\accnone</code>	No accent characters (over dot/over comma).
<code>\accdot</code>	Over-dot accent.
<code>\acccomma</code>	Over-comma accent.
<code>\acccircle</code>	Over-circle accent.
<code>\accunderdot</code>	Under-dot accent.
<code>\b</code>	Bold.*
<code>\caps</code>	All capitals.*
<code>\cb</code> <i>N</i>	Background color (the default is 0). <b>N</b> specifies the color as an index of the color table.
<code>\cchs</code> <i>N</i>	Indicates any characters not belonging to the default document character set and tells which character set they do belong to. Macintosh character sets are represented by values greater than 255. The values for <b>N</b> correspond to the values for the <code>\fcharset</code> control word.
<code>\cf</code> <i>N</i>	Foreground color (the default is 0). <b>N</b> specifies the color as an index of the color table.
<code>\charscale</code> <i>xN</i>	Character scaling value. The <b>N</b> argument is a value representing a percentage (the default is 100).
<code>\cs</code> <i>N</i>	Designates character style. If a character style is specified, style properties must be specified with the character run. <b>N</b> refers to an entry in the style table.
<code>\cgrid</code> <i>N</i>	Character grid.
<code>\g</code>	Destination related to character grids.
<code>\gcw</code>	Grid column width.
<code>\gridtbl</code>	Destination keyword related to character grids.
<code>\deleted</code>	Marks the text as deletion.*
<code>\dn</code> <i>N</i>	Subscript position in half-points (the default is 6).
<code>\embo</code>	Emboss.
<code>\expnd</code> <i>N</i>	Expansion or compression of the space between characters in quarter-points; a negative value compresses (the default is 0).
<code>\expndtw</code> <i>N</i>	Expansion or compression of the space between characters in twips; a negative value compresses. For backward compatibility, both <code>\expndtw</code> and <code>\expnd</code> should be emitted.
<code>\fittext</code> <i>N</i>	Fit the text in the current group in <b>N</b> twips. When <b>N</b> is set to -1 ( <code>\fittext-1</code> ), it indicates a continuation of the previous <code>\fittext</code> <b>N</b> run. In other words, <code>{\fittext1000 Fit this}</code> <code>{\fittext-1 text}</code> fits the string "Fit this text" in 1000 twips.
<code>\f</code> <i>N</i>	Font number. <b>N</b> refers to an entry in the font table.
<code>\fs</code> <i>N</i>	Font size in half-points (the default is 24).
<code>\i</code>	Italic.*
<code>\impr</code>	Engrave.
<code>\kerning</code> <i>N</i>	Point size (in half-points) above which to kern character pairs. <code>\kerning0</code> turns off kerning.

Control word	Meaning
<code>\langfeN</code>	Applies a language to a character. <b>N</b> is a number corresponding to a language. The <code>\plain</code> control word resets the language property to the language defined by <code>\deflangfeN</code> in the document properties.
<code>\langfenpN</code>	Applies a language to a character. <b>N</b> is a number corresponding to a language. The <code>\plain</code> control word resets the language property to the language defined by <code>\deflangfeN</code> in the document properties. Usually follows <code>\langfeN</code> .
<code>\langN</code>	Applies a language to a character. <b>N</b> is a number corresponding to a language. The <code>\plain</code> control word resets the language property to the language defined by <code>\deflangN</code> in the document properties.
<code>\langnpN</code>	Applies a language to a character. <b>N</b> is a number corresponding to a language. The <code>\plain</code> control word resets the language property to the language defined by <code>\deflangN</code> in the document properties. It is identical to <code>\langN</code> , but needed when <code>\noproof</code> is written together with <code>\lang1024</code> in order to preserve the language of the text that is not being checked for spelling or grammar. Usually follows <code>\langN</code> .
<code>\ltrch</code>	The character data following this control word is treated as a left-to-right run (the default).
<code>\rtlch</code>	The character data following this control word is treated as a right-to-left run.
<code>\noproof</code>	Do not check spelling or grammar for text in the group. Serves the function of <code>\lang1024</code> . Usually <code>\lang1024</code> is emitted with it for backward compatibility with old readers.
<code>\nosupersub</code>	Turns off superscripting or subscripting.
<code>\nosectexpand</code>	Disables character space basement.
<code>\outl</code>	Outline.*
<code>\rtlch</code>	The character data following this control word is treated as a right-to-left run.
<code>\scaps</code>	Small capitals.*
<code>\shad</code>	Shadow.*
<code>\strike</code>	Strikethrough.*
<code>\striked1</code>	Double strikethrough. <code>\striked0</code> turns it off.
<code>\sub</code>	Subscripts text and shrinks point size according to font information.
<code>\super</code>	Superscripts text and shrinks point size according to font information.
<code>\ul</code>	Continuous underline. <code>\ul0</code> turns off all underlining.
<code>\ulcN</code>	Underline color.
<code>\uld</code>	Dotted underline.
<code>\uldash</code>	Dashed underline.
<code>\uldashd</code>	Dash-dotted underline.
<code>\uldashdd</code>	Dash-dot-dotted underline.
<code>\uldb</code>	Double underline.
<code>\ulhwave</code>	Heavy wave underline.
<code>\ulldash</code>	Long dashed underline.
<code>\ulnone</code>	Stops all underlining.
<code>\ulth</code>	Thick underline.
<code>\ulthd</code>	Thick dotted underline.
<code>\ulthdash</code>	Thick dashed underline.
<code>\ulthdashd</code>	Thick dash-dotted underline.
<code>\ulthdashdd</code>	Thick dash-dot-dotted underline.
<code>\ulthldash</code>	Thick long dashed underline.
<code>\ululdbwave</code>	Double wave underline.
<code>\ulw</code>	Word underline.

Control word	Meaning
\ulwave	Wave underline.
\upN	Superscript position in half-points (the default is 6).
\v	Hidden text.*
\webhidden	Indicates that the text in the group is hidden in the Word 2002 Web View and will not be emitted upon saving as Web page.

The following table defines the standard languages used by Microsoft. This table was generated by the Unicode group for use with TrueType and Unicode.

<b>Language</b>	<b>ID (hexadecimal)</b>	<b>ID (decimal)</b>
Afrikaans	0x0436	1078
Albanian	0x041c	1052
Arabic	0x0401	1025
Arabic Algeria	0x1401	5121
Arabic Bahrain	0x3c01	15361
Arabic Egypt	0x0c01	3073
Arabic General	0x0001	1
Arabic Iraq	0x0801	2049
Arabic Jordan	0x2c01	11265
Arabic Kuwait	0x3401	13313
Arabic Lebanon	0x3001	12289
Arabic Libya	0x1001	4097
Arabic Morocco	0x1801	6145
Arabic Oman	0x2001	8193
Arabic Qatar	0x4001	16385
Arabic Syria	0x2801	10241
Arabic Tunisia	0x1c01	7169
Arabic U.A.E.	0x3801	14337
Arabic Yemen	0x2401	9217
Armenian	0x042b	1067
Assamese	0x044d	1101
Azeri Cyrillic	0x082c	2092
Azeri Latin	0x042c	1068
Basque	0x042d	1069
Bengali	0x0445	1093
Bosnia Herzegovina	0x101a	4122
Bulgarian	0x0402	1026
Burmese	0x0455	1109
Byelorussian	0x0423	1059
Catalan	0x0403	1027
Chinese China	0x0804	2052
Chinese General	0x0004	4
Chinese Hong Kong	0x0c04	3076
Chinese Macao	0x0c04	3076
Chinese Singapore	0x1004	4100
Chinese Taiwan	0x0404	1028
Croatian	0x041a	1050
Czech	0x0405	1029
Danish	0x0406	1030
Dutch Belgium	0x0813	2067
Dutch Standard	0x0413	1043

English Australia	0x0c09	3081
English Belize	0x2809	10249
English British	0x0809	2057
English Canada	0x1009	4105
English Caribbean	0x2409	9225
English General	0x0009	9
English Ireland	0x1809	6153
English Jamaica	0x2009	8201
English New Zealand	0x1409	5129
English Philippines	0x3409	13321
English South Africa	0x1c09	7177
English Trinidad	0x2c09	11273
English United States	0x0409	1033
English Zimbabwe	0x0409	1033
Estonian	0x0425	1061
Faeroese	0x0438	1080
Farsi	0x0429	1065
Finnish	0x040b	1035
French	0x040c	1036
French Belgium	0x080c	2060
French Cameroon	0x2c0c	11276
French Canada	0x0c0c	3084
French Cote d'Ivoire	0x300c	12300
French Luxemburg	0x140c	5132
French Mali	0x340c	13324
French Monaco	0x180c	6156
French Reunion	0x200c	8204
French Senegal	0x280c	10252
French Swiss	0x100c	4108
French West Indies	0x1c0c	7180
French Zaire	0x240c	9228
Frisian	0x0462	1122
Gaelic	0x043c	1084
Gaelic Ireland	0x083c	2108
Galician	0x0456	1110
Georgian	0x0437	1079
German	0x0407	1031
German Austrian	0x0c07	3079
German Liechtenstein	0x1407	5127
German Luxemburg	0x1007	4103
German Switzerland	0x0807	2055
Greek	0x0408	1032

Gujarati	0x0447	1095
Hebrew	0x040d	1037
Hindi	0x0439	1081
Hungarian	0x040e	1038
Icelandic	0x040f	1039
Indonesian	0x0421	1057
Italian	0x0410	1040
Italian Switzerland	0x0810	2064
Japanese	0x0411	1041
Kannada	0x044b	1099
Kashmiri	0x0460	1120
Kashmiri India	0x0860	2144
Kazakh	0x043f	1087
Khmer	0x0453	1107
Kirghiz	0x0440	1088
Konkani	0x0457	1111
Korean	0x0412	1042
Korean Johab	0x0812	2066
Lao	0x0454	1108
Latvian	0x0426	1062
Lithuanian	0x0427	1063
Lithuanian Classic	0x0827	2087
Macedonian	0x043e	1086
Malay	0x043e	1086
Malay Brunei Darussalam	0x083e	2110
Malayalam	0x044c	1100
Maltese	0x043a	1082
Manipuri	0x0458	1112
Marathi	0x044e	1102
Mongolian	0x0450	1104
Nepali	0x0461	1121
Nepali India	0x0861	2145
Norwegian Bokmal	0x0414	1044
Norwegian Nynorsk	0x0814	2068
Oriya	0x0448	1096
Polish	0x0415	1045
Portuguese Brazil	0x0416	1046
Portuguese Iberian	0x0816	2070
Punjabi	0x0446	1094
Rhaeto-Romanic	0x0417	1047
Romanian	0x0418	1048
Romanian Moldova	0x0818	2072



Russian	0x0419	1049
Russian Moldova	0x0819	2073
Sami Lappish	0x043b	1083
Sanskrit	0x044f	1103
Serbian Cyrillic	0x0c1a	3098
Serbian Latin	0x081a	2074
Sindhi	0x0459	1113
Slovak	0x041b	1051
Slovenian	0x0424	1060
Sorbian	0x042e	1070
Spanish Argentina	0x2c0a	11274
Spanish Bolivia	0x400a	16394
Spanish Chile	0x340a	13322
Spanish Colombia	0x240a	9226
Spanish Costa Rica	0x140a	5130
Spanish Dominican Republic	0x1c0a	7178
Spanish Ecuador	0x300a	12298
Spanish El Salvador	0x440a	17418
Spanish Guatemala	0x100a	4106
Spanish Honduras	0x480a	18442
Spanish Mexico	0x080a	2058
Spanish Modern	0x0c0a	3082
Spanish Nicaragua	0x4c0a	19466
Spanish Panama	0x180a	6154
Spanish Paraguay	0x3c0a	15370
Spanish Peru	0x280a	10250
Spanish Puerto Rico	0x500a	20490
Spanish Traditional	0x040a	1034
Spanish Uruguay	0x380a	14346
Spanish Venezuela	0x200a	8202
Sutu	0x0430	1072
Swahili	0x0441	1089
Swedish	0x041d	1053
Swedish Finland	0x081d	2077
Tajik	0x0428	1064
Tamil	0x0449	1097
Tatar	0x0444	1092
Telugu	0x044a	1098
Thai	0x041e	1054
Tibetan	0x0451	1105
Tsonga	0x0431	1073
Tswana	0x0432	1074

Turkish	0x041f	1055
Turkmen	0x0442	1090
Ukrainian	0x0422	1058
Urdu	0x0420	1056
Urdu India	0x0820	2080
Uzbek Cyrillic	0x0843	2115
Uzbek Latin	0x0443	1091
Venda	0x0433	1075
Vietnamese	0x042a	1066
Welsh	0x0452	1106
Xhosa	0x0434	1076
Yiddish	0x043d	1085
Zulu	0x0435	1077

To read negative **\expnd** values from Word for the Macintosh, an RTF reader should use only the low-order 6 bits of the value read. Word for the Macintosh does not emit negative values for **\expnd**. Instead, it treats values from 57 through 63 as -7 through -1, respectively (the low-order 6 bits of 57 through 63 are the same as -7 through -1).

### Character Borders and Shading

Character shading has the following syntax:

```
<shading>      (\chshdng | <pat>) \chcfpat? \chcbpat?
<pat>           \chbghoriz | \chbgvert | \chbgfdiag | \chbgbdiag | \chbgcross | \chbgdcross | \chbgdkhoriz |
                \chbgdkvert | \chbgdkfdiag | \chbgdkbdiag | \chbgdkcross | \chbgdkdcross
```

Control word	Meaning
\chbrdr	Character border (border always appears on all sides).
\chshdng $N$	Character shading. The <b><math>N</math></b> argument is a value representing the shading of the text in hundredths of a percent.
\chcfpat $N$	<b><math>N</math></b> is the color of the background pattern, specified as an index into the document's color table.
\chcbpat $N$	<b><math>N</math></b> is the fill color, specified as an index into the document's color table.
\chbghoriz	Specifies a horizontal background pattern for the text.
\chbgvert	Specifies a vertical background pattern for the text.
\chbgfdiag	Specifies a forward diagonal background pattern for the text (\\\\).
\chbgbdiag	Specifies a backward diagonal background pattern for the text (////).
\chbgcross	Specifies a cross background pattern for the text.
\chbgdcross	Specifies a diagonal cross background pattern for the text.
\chbgdkhoriz	Specifies a dark horizontal background pattern for the text.
\chbgdkvert	Specifies a dark vertical background pattern for the text.
\chbgdkfdiag	Specifies a dark forward diagonal background pattern for the text (\\\\).
\chbgdkbdiag	Specifies a dark backward diagonal background pattern for the text (////).
\chbgdkcross	Specifies a dark cross background pattern for the text.
\chbgdkdcross	Specifies a dark diagonal cross background pattern for the text.

The color, width, and border style keywords for character borders are the same as the keywords for paragraph borders.

Control word	Meaning
Track Changes (Revision Mark) Properties	
<code>\revised</code>	Text has been added since revision marking was turned on.
<code>\revauthN</code>	Index into the revision table. The content of the <b>N</b> th group in the revision table is considered to be the author of that revision.
<code>\revdtmN</code>	Time of the revision. The 32-bit DTTM structure is emitted as a long integer.
<code>\crauthN</code>	Index into the revision table. The content of the <b>N</b> th group in the revision table is considered to be the author of that revision.  <b>Note</b> This keyword is used to indicate formatting revisions, such as bold, italic, and so on.
<code>\crdateN</code>	Time of the revision. The 32-bit DTTM structure is emitted as a long integer.
<code>\revauthdelN</code>	Index into the revision table. The content of the <b>N</b> th group in the revision table is considered to be the author of that deletion.
<code>\revdtmdelN</code>	Time of the deletion. The 32-bit DTTM structure is emitted as a long integer.

**Associated Character Properties**

Bidirectional-aware text processors often need to associate a Latin (or other left-to-right) font with an Arabic or Hebrew (or other right-to-left) font. The association is needed to match commonly used pairs of fonts in name, size, and other attributes. Although RTF defines a broad variety of associated character properties, any implementation may choose not to implement a particular associated character property and share the property between the Latin and Arabic fonts.

Property association uses the following syntax:

<code>&lt;atext&gt;</code>	<code>&lt;lrrun&gt;   &lt;rtlrun&gt;</code>
<code>&lt;lrrun&gt;</code>	<code>\rtlch \af &amp; &lt;aprops&gt;* \ltrch &lt;ptext&gt;</code>
<code>&lt;rtlrun&gt;</code>	<code>\ltrch \af &amp; &lt;aprops&gt;* \rtlch &lt;ptext&gt;</code>
<code>&lt;atext&gt;</code>	<code>&lt;losbrun&gt;   &lt;hisbrun&gt;   &lt;dbrun&gt;</code>
<code>&lt;losbrun&gt;</code>	<code>\hich \af &amp; &lt;aprops&gt; \dbch \af &amp; &lt;aprops&gt; \loch &lt;ptext&gt;</code>
<code>&lt;hisbrun&gt;</code>	<code>\loch \af &amp; &lt;aprops&gt; \dbch \af &amp; &lt;aprops&gt; \hich &lt;ptext&gt;</code>
<code>&lt;dbrun&gt;</code>	<code>\loch \af &amp; &lt;aprops&gt; \hich \af &amp; &lt;aprops&gt; \dbch &lt;ptext&gt;</code>

The following are some examples of property association. The first example is a right-to-left run. Text will use the default bidirectional font, and will be underlined. The left-to-right font associated with this run is font 2 (in the font table) with bold and underlining.

```
\ltrch\af2\ab\au\rtlch\u Sample Text
```

The next example is a left-to-right run. The right-to-left font and the left-to-right font use the default font (specified by `\deff`).

```
\plain\rtlch\ltrch Sample Text
```

The following example is a left-to-right run. The right-to-left font is font 5, bold and italicized. The left-to-right font is the default font, underlined. If the reader does not support underlining in the associated font, both fonts will be underlined.

```
\rtlch\af5\ab\ai\ltrch\u Sample Text
```

The property association control words (described as `<aprops>` in the syntax description) are listed in the following table. Some control words (indicated in the table by an asterisk following the description) can be turned off by appending 0 to the control word.

Control word	Meaning
\ab	Associated font is bold.*
\acaps	Associated font is all capitals.*
\acf <i>N</i>	Associated foreground color (the default is 0).
\adn <i>N</i>	Associated font is subscript position in half-points (the default is 6).
\aexpnd <i>N</i>	Expansion or compression of the space between characters in quarter-points; a negative value compresses (the default is 0).
\af <i>N</i>	Associated font number (the default is 0).
\afs <i>N</i>	Associated font size in half-points (the default is 24).
\ai	Associated font is italic.*
\alang <i>N</i>	Language ID for the associated font. (This uses the same language ID codes described in the <a href="#">standard language table</a> in the <a href="#">Character Text</a> section of this Specification.)
\aoutl	Associated font is outline.*
\ascaps	Associated font is small capitals.*
\ashad	Associated font is shadow.*
\astrike	Associated font is strikethrough.*
\aul	Associated font is continuous underline. <b>\aul0</b> turns off all underlining for the alternate font.
\auld	Associated font is dotted underline.
\auldb	Associated font is double underline.
\aulnone	Associated font is no longer underlined.
\aulw	Associated font is word underline.
\aup <i>N</i>	Superscript position in half-points (the default is 6).
\loch	The text consists of single-byte low-ANSI (0x00–0x7F) characters.
\hich	The text consists of single-byte high-ANSI (0x80–0xFF) characters.
\dbch	The text consists of double-byte characters.

## Highlighting

This property applies highlighting to text. The formatting is not a character format, so it cannot be part of a style definition.

Control word	Meaning
\highlight <i>N</i>	Highlights the specified text. <b><i>N</i></b> specifies the color as an index of the color table.

## Special Characters

The RTF Specification includes control words for special characters (described as <spec> in the character-text syntax description). If a special-character control word is not recognized by the RTF reader, it is ignored and the text following it is considered plain text. The RTF Specification is flexible enough to allow new special characters to be added for interchange with other software.

The special RTF characters are listed in the following table.

Control word	Meaning
\chdate	Current date (as in headers).
\chdpl	Current date in long format (for example, Thursday, October 28, 1997).
\chdpa	Current date in abbreviated format (for example, Thu, Oct 28, 1997).
\chtime	Current time (as in headers).
\chpgn	Current page number (as in headers).
\sectnum	Current section number (as in headers).
\chftn	Automatic footnote reference (footnotes follow in a group).
\chatn	Annotation reference (annotation text follows in a group).
\chftnsep	Anchoring character for footnote separator.
\chftnsepc	Anchoring character for footnote continuation.
\cell	End of table cell.
\nestcell	End of nested table cell.
\row	End of table row.
\nestrow	End of nested table row.
\par	End of paragraph.
\sect	End of section and paragraph.
\page	Required page break.
\column	Required column break.
\line	Required line break (no paragraph break).
\lbrN	Text wrapping break of type: <ul style="list-style-type: none"> <li>0        Default line break (just like <b>\line</b>)</li> <li>1        Clear left</li> <li>2        Clear right</li> <li>3        Clear all</li> </ul> Whenever an <b>\lbr</b> is emitted, a <b>\line</b> will be emitted for the benefit of old readers.
\softpage	Nonrequired page break. Emitted as it appears in galley view.
\softcol	Nonrequired column break. Emitted as it appears in galley view.
\softline	Nonrequired line break. Emitted as it appears in galley view.
\softlheightN	Nonrequired line height. This is emitted as a prefix to each line.
\tab	Tab character.
\emdash	Em dash (—).
\endash	En dash (–).
\emspace	Nonbreaking space equal to width of character "m" in current font. Some old RTF writers use the construct ' <b>\emspace</b> }' (with two spaces before the closing brace) to trick readers unaware of <b>\emspace</b> into parsing a regular space. A reader should interpret this as an <b>\emspace</b> and a regular space.
\enspace	Nonbreaking space equal to width of character "n" in current font. Some old RTF writers use the construct ' <b>\enspace</b> }' (with two spaces before the closing brace) to trick readers unaware of <b>\enspace</b> into parsing a regular space. A reader should interpret this as an <b>\enspace</b> and a regular space.
\qmspace	One-quarter em space.
\bullet	Bullet character.
\lquote	Left single quotation mark.
\rquote	Right single quotation mark.
\dblquote	Left double quotation mark.

Control word	Meaning
\rdblquote	Right double quotation mark.
\	Formula character. (Used by Word 5.1 for the Macintosh as the beginning delimiter for a string of formula typesetting commands.)
\~	Nonbreaking space.
\-	Optional hyphen.
\_	Nonbreaking hyphen.
\:	Specifies a subentry in an index entry.
\*	Marks a destination whose text should be ignored if not understood by the RTF reader.
\'hh	A hexadecimal value, based on the specified character set (may be used to identify 8-bit values).
\ltrmark	The following characters should be displayed from left to right; usually found at the start of <b>\ltrch</b> runs.
\rtlmark	The following characters should be displayed from right to left; usually found at the start of <b>\rtlch</b> runs.
\zwbo	Zero-width break opportunity. Used to insert break opportunity between two characters.
\zwnbo	Zero-width nonbreak opportunity. Used to remove break opportunity between two characters.
\zwj	Zero-width joiner. This is used for ligating (joining) characters.
\zwnj	Zero-width nonjoiner. This is used for unligating a character.

A carriage return (character value 13) or linefeed (character value 10) is treated as a **\par** control if the character is preceded by a backslash. You must include the backslash; otherwise, RTF ignores the control word. (You may also want to insert a carriage-return/linefeed pair without backslashes at least every 255 characters for better text transmission over communication lines.)

A tab (character value 9) should be treated as a **\tab** control word. Not all RTF readers understand this; therefore, an RTF writer should always emit the control word for tabs.

The following are the code values for the special characters listed.

Control word	Word for Windows and OS/2	Apple Macintosh
\bullet	149	0xA5
\endash	150	0xD1
\emdash	151	0xD0
\lquote	145	0xD4
\rquote	146	0xD5
\ldblquote	147	0xD2
\rdblquote	148	0xD3

## Document Variables

Document variables are definable and accessed through macros. Document variables have the following syntax:

<variables>	{\* <docvar> '{' <varname> '}' '{' <vartext> '}' '}' }
<docvar>	\docvar
<varname>	#PCDATA
<vartype>	#PCDATA

The control word is described in the following table.

Control word	Meaning
\docvar	A group that defines a document variable name and its value.

## Bookmarks

This destination may specify one of two control words: **\\*\bkmkstart**, which indicates the start of the specified bookmark, and **\\*\bmkend**, which indicates the end of the specified bookmark.

Bookmarks have the following syntax:

<book>	<bookstart>   <bookend>
<bookstart>	'{\* \bkmkstart (\bkmkcolf? & \bkmkcoll?) #PCDATA \''}
<bookend>	'{\* \bmkend #PCDATA \''}

A bookmark is shown in the following example:

```
\pard\plain \fs20 Kuhn believes that science, rather than
discovering in experience certain structured
relationships, actually creates (or already participates in)
a presupposed structure to which it fits the data.
{\bkmkstart paradigm} Kuhn calls such a presupposed
structure a paradigm.{\bmkend paradigm}
```

The bookmark start and end are matched with the bookmark tag. In this example, the bookmark tag is "paradigm." Each bookmark start should have a matching bookmark end; however, the bookmark start and the bookmark end may be in any order.

**\bkmkcolfN** is used to denote the first column of a table covered by a bookmark. If it is not included, the first column is assumed. **\bkmkcollN** is used to denote the last column. If it is not used, the last column is assumed. These controls are used within the **\\*\bkmkstart** destination following the **\bkmkstart** control. For example, `{\*\bkmkstart\bkmkcolf2\bkmkcoll5 Table1}` places the bookmark "Table1" in columns 2 through 5 of a table.

## Protection Exceptions

This destination may specify one of two control words: **\\*\protstart**, which indicates the start of the specified protection-exception range, and **\\*\protend**, which indicates the end of the range.

Protection exceptions have the following syntax:

<protexcept>	<protstart>   <protend>
<protstart>	'{\* \*\protstart #PCDATA \''}
<protend>	'{\* \*\protend #PCDATA \''}

Control word	Meaning
\protstart	Denotes the start of a section exempted from doc protection. The data that follows it is an encoding of the user name.
\protend	Denotes the end of a section exempted from doc protection

The following is an example of protected ranges:

```
\par \high\af0\dbch\af11\loch\af0 This is {\*\protstart
0300010003000000}\high\af0\dbch\af11\loch\af0 SECTION 2.
```





Control word	Meaning
\emfblip	Source of the picture is an EMF (enhanced metafile).
\pngblip	Source of the picture is a PNG.
\jpegblip	Source of the picture is a JPEG.
\shppict	Specifies a Word 97 through Word 2002 picture. This is a destination control word.
\nonshppict	Specifies that Word 97 through Word 2002 has written a {\pict destination that it will not read on input. This keyword is for compatibility with other readers.
\macpict	Source of the picture is QuickDraw.
\pmmetafile/N	Source of the picture is an OS/2 metafile. The <b>N</b> argument identifies the metafile type. The <b>N</b> values are described in the <a href="#">\pmmetafile table</a> further on in this section.
\wmetafile/N	Source of the picture is a Windows metafile. The <b>N</b> argument identifies the metafile type (the default type is 1).
\dibitmap/N	Source of the picture is a Windows device-independent bitmap. The <b>N</b> argument identifies the bitmap type, which must equal 0.  The information to be included in RTF from a Windows device-independent bitmap is the concatenation of the BITMAPINFO structure followed by the actual pixel data.
\wbitmap/N	Source of the picture is a Windows device-dependent bitmap. The <b>N</b> argument identifies the bitmap type (must equal 0).  The information to be included in RTF from a Windows device-dependent bitmap is the result of the <b>GetBitmapBits</b> function.

The following is an example of the **\shppict** group:

```
{\*\shppict {\pict \emfblip .... }}{\nonshppict {\pict ....}}
```

For best device-independence and interoperability with Microsoft products, use of the **\wbitmap** and **\dibitmap** control words is discouraged. Rather, bitmaps should be embedded within Windows metafiles and the **\wmetafile** control word should be used. For more information on the **GetDIBits** and **GetBitmapBits** functions and the structure of Windows device-independent and device-dependent bitmaps, as well as information on embedding bitmaps within metafiles, see *The [GDI Bitmap Reference](#) section on MSDN*. The following table outlines picture control keywords:

Control word	Meaning
<b>Bitmap Information</b>	
\wbmbitspixel <i>N</i>	Number of adjacent color bits on each plane needed to define a pixel. Possible values are 1 (monochrome), 4 (16 colors), 8 (256 colors) and 24 ( <b>RGB</b> ). The default value is 1.
\wbmplanes <i>N</i>	Number of bitmap color planes (must equal 1).
\wbmwidthbytes <i>N</i>	Specifies the number of bytes in each raster line. This value must be an even number because the Windows Graphics Device Interface (GDI) assumes that the bit values of a bitmap form an array of integer (two-byte) values. In other words, <b>\wbmwidthbytes</b> multiplied by 8 must be the next multiple of 16 greater than or equal to the <b>\picw</b> (bitmap width in pixels) value.
<b>Picture Size, Scaling, and Cropping</b>	
\picw <i>N</i>	<i>xExt</i> field if the picture is a Windows metafile; picture width in pixels if the picture is a bitmap or from QuickDraw. The <b>N</b> argument is a long integer.
\pich <i>N</i>	<i>yExt</i> field if the picture is a Windows metafile; picture height in pixels if the picture is a bitmap or from QuickDraw. The <b>N</b> argument is a long integer.
\picwgoal <i>N</i>	Desired width of the picture in twips. The <b>N</b> argument is a long integer.
\pichgoal <i>N</i>	Desired height of the picture in twips. The <b>N</b> argument is a long integer.
\picscalex <i>N</i>	Horizontal scaling value. The <b>N</b> argument is a value representing a percentage (the default is 100 percent).
\picscaley <i>N</i>	Vertical scaling value. The <b>N</b> argument is a value representing a percentage (the default is 100 percent).
\picscaled	Scales the picture to fit within the specified frame. Used only with <b>\macpict</b> pictures.
\picprop	Indicates there are shape properties applied to an inline picture. This is a destination control word.
\defshp	Indicates that the inline picture is a WordArt shape.
\piccropt <i>N</i>	Top cropping value in twips. A positive value crops toward the center of the picture; a negative value crops away from the center, adding a space border around the picture (the default value is 0).
\piccropb <i>N</i>	Bottom cropping value in twips. A positive value crops toward the center of the picture; a negative value crops away from the center, adding a space border around the picture (the default value is 0).
\piccropl <i>N</i>	Left cropping value in twips. A positive value crops toward the center of the picture; a negative value crops away from the center, adding a space border around the picture (the default value is 0).
\piccropr <i>N</i>	Right cropping value in twips. A positive value crops toward the center of the picture; a negative value crops away from the center, adding a space border around the picture (the default value is 0).
<b>Metafile Information</b>	
\picbmp	Specifies whether a metafile contains a bitmap.
\picbpp <i>N</i>	Specifies the bits per pixel in a metafile bitmap. The valid range is 1 through 32, with 1, 4, 8, and 24 being recognized.
<b>Picture Data</b>	
\bin <i>N</i>	The picture is in binary format. The numeric parameter <b>N</b> is the number of bytes that follow. Unlike all other controls, this control word takes a 32-bit parameter.
\blipupi <i>N</i>	<b>N</b> represents units per inch on a picture (only certain image types need or output this)
\blipuid XXXXX	Used as {\*\blipuid XXXXX} where XXXX is a 16-byte identification number for the image.
\bliptag <i>N</i>	A unique identifier for a picture, where <b>N</b> is a long integer value.

The **\wbimap** control word is optional. If no other picture type is specified, the picture is assumed to be a Windows bitmap. If **\wmetafile** is specified, the **N** argument can be one of the following types.

Type	N argument
MM_TEXT	1
MM_LOMETRIC	2
MM_HIMETRIC	3
MM_LOENGLISH	4
MM_HIENGLISH	5
MM_TWIPS	6
MM_ISOTROPIC	7
MM_ANISOTROPIC	8

If **\pmmetafile** is specified, the **N** argument can be one of the following types.

Type	N argument
PU_ARBITRARY	0x0004
PU_PELS	0x0008
PU_LOMETRIC	0x000C
PU_HIMETRIC	0x0010
PU_LOENGLISH	0x0014
PU_HIENGLISH	0x0018
PU_TWIPS	0x001C

Be careful with spaces following control words when dealing with pictures in binary format. When reading files, RTF considers the first space after a control word to be the delimiter and subsequent spaces part of the document text. Therefore, any extra spaces are attached to the picture, with unpredictable results.

RTF writers should not use the carriage return/line feed (CR/LF) combination to break up pictures in binary format. If they do, the CR/LF combination is treated as literal text and considered part of the picture data.

The picture in hexadecimal or binary format follows the picture-destination control words. The following example illustrates the destination format:

```
{\pict\wbitemap0\picw170\pich77\wbmbitspixel1\wbmplanes1\wbmwidthbytes22
\picwgoal505
\pichgoal221
\picscalex172
\picscaley172
49f2000000000273023d1101a030
3901000a000000000273023d98
0048000200000275
02040000200010275023e000000000
273023d000002b90002b90002
b90002b90002b9
0002b90002b90002b90002b90002b90002}
```

b92222b90002b90002b90  
002b90002b9  
0002b90002b90002b90002b9000

## Objects

Microsoft OLE links, Microsoft OLE embedded objects, and Macintosh Edition Manager subscriber objects are represented in RTF as objects. Objects are destinations that contain data and a result. The data is generally hidden to the application that produced the document. A separate application uses the data and supplies the appearance of the data. This appearance is the result of the object.

The representation of objects in RTF is designed to allow RTF readers that don't understand objects, or don't use a particular type of object, to use the current result in place of the object. This allows the appearance of the object to be maintained through the conversion even though the object functionality is lost. Each object comes with optional information about itself, a required destination that contains the object data, and an optional result that contains the current appearance of the object. This result contains standard RTF. The RTF writer is responsible for providing the result so that existing RTF readers that do not support objects, or do not support a particular type of object, are able to display the object.

When the object is an OLE embedded or linked object, the data part of the object is the structure produced by the **OLESaveToStream** function. Some OLE clients rely on the OLE system to render the object when a copy of the result is not available to the RTF writer for that application. In these cases, the object result can be extracted from the structure produced by the **OLESaveToStream** function. For information about the **OLESaveToStream** function, see the Microsoft Object Linking and Embedding Software Development Kit.

This destination has the following syntax:

<obj>	( '{' \object (<objtype> & <objmod>? & <objclass>? & <objname>? & <objtime>? & <objsize>? & <rsltmod>?) <objdata> <result> '}' )   <pubobject>
<objtype>	\objemb   \objlink   \objautlink   \objsub   \objpub   \objicemb   objhtml   objocx
<objmod>	\linkself? & \objlock?   \objupdate?
<objclass>	'{\*' \objclass #PCDATA '}'
<objname>	'{\*' \objname #PCDATA '}'
<objtime>	'{\*' \objtime <time> '}'
<rsltmod>	\rsltmerge? & <rslttype>?
<rslttype>	\rsltrtf   \rslttxt   \rsltpict   \rsltbmp   \rslthtml
<objsize>	\objsetsize? & \objalign? & \objtransy? & <objhw>? & \objcropt? & \objcropr? & \objcropl? & \objcropr? & \objscalex? & \objscaley?
<objhw>	\objh & \objw
<objdata>	'{\*' \objdata (<objalias>? & <objsect>?) <data> '}'
<objalias>	'{\*' \objalias <data> '}'
<objsect>	'{\*' \objsect <data> '}'
<result>	'{' \result <para>+ '}'

These control words are described in the following table.

Control word	Meaning
<b>Object Type</b>	
\objemb	An object type of OLE embedded object. If no type is given for the object, the object is assumed to be of type <b>\objemb</b> .
\objlink	An object type of OLE link.
\objautlink	An object type of OLE autolink.
\objsub	An object type of Macintosh Edition Manager subscriber.
\objpub	An object type of Macintosh Edition Manager publisher.
\objcemb	An object type of MS Word for the Macintosh Installable Command (IC) Embedder.
\objhtml	An object type of Hypertext Markup Language (HTML) control.
\objocx	An object type of OLE control.
<b>Object Information</b>	
\linkself	The object is a link to another part of the same document.
\objlock	Locks the object from any updates.
\objupdate	Forces an update to the object before displaying it. Note that this will override any values in the <objsize> control words, but values should always be provided for these to maintain backward compatibility.
\objclass	The text argument is the object class to use for this object; ignore the class specified in the object data. This is a destination control word.
\objname	The text argument is the name of this object. This is a destination control word.
\objtime	Lists the time that the object was last updated.
<b>Object Size, Position, Cropping, and Scaling</b>	
\objhN	<b>N</b> is the original object height in twips, assuming the object has a graphical representation.
\objwN	<b>N</b> is the original object width in twips, assuming the object has a graphical representation.
\objsetsize	Forces the object server to set the object's dimensions to the size specified by the client.
\objalignN	<b>N</b> is the distance in twips from the left edge of the objects that should be aligned on a tab stop. This is needed to place Equation Editor equations correctly.
\objtransyN	<b>N</b> is the distance in twips the objects should be moved vertically with respect to the baseline. This is needed to place Math Type equations correctly.
\objcroptN	<b>N</b> is the top cropping value in twips.
\objcropbN	<b>N</b> is the bottom cropping value in twips.
\objcropIN	<b>N</b> is the left cropping value in twips.
\objcroprN	<b>N</b> is the right cropping value in twips.
\objscalexN	<b>N</b> is the horizontal scaling percentage.
\objscaleyN	<b>N</b> is the vertical scaling percentage.
<b>Object Data</b>	
\objdata	This subdestination contains the data for the object in the appropriate format; OLE objects are in <b>OLESaveToStream</b> format. This is a destination control word.
\objalias	This subdestination contains the alias record of the publisher object for the Macintosh Edition Manager. This is a destination control word.
\objsect	This subdestination contains the section record of the publisher object for the Macintosh Edition Manager. This is a destination control word.
<b>Object Result</b>	
\rsltrtf	Forces the result to be RTF, if possible.
\rsltpict	Forces the result to be a Windows metafile or MacPict image format, if possible.
\rsltbmp	Forces the result to be a bitmap, if possible.

Control word	Meaning
\rsittxt	Forces the result to be plain text, if possible.
\rslhtml	Forces the result to be HTML, if possible.
\sltmerge	Uses the formatting of the current result whenever a new result is obtained.
\result	The result destination is optional in the <b>\object</b> destination. The result destination contains the last update of the result of the object. The data of the result destination should be standard RTF. This allows RTF readers that don't understand objects or the type of object represented to use the current result, in place of the object, to maintain appearance. This is a destination control word.

When Word is used as an editor for e-mail, the following control word can be emitted. Otherwise, it is not seen.

Control word	Meaning
\objattph	Object attachment placeholder. Used in the RTF stream when Word is started as an e-mail editor and the message contains attachments. The control word lists where in the text stream the attachment should be placed. It does not define the actual attachment.

### Macintosh Edition Manager Publisher Objects

Word for the Macintosh writes publisher objects for the Macintosh Edition Manager in terms of bookmarks (see the [Bookmark](#) section of this specification). The range of publisher objects are marked as bookmarks, so these controls are all used within the **\bkmkstart** destination. The RTF syntax for a publisher object is:

```
<pubobject>      '{\*' \bkmkstart \bkmkpub \pubauto? (<objalias>? & <objsect>) #PCDATA '}'
```

These control words are described in the following table.

Control word	Meaning
\bkmkpub	The bookmark identifies a Macintosh Edition Manager publisher object.
\pubauto	The publisher object updates all Macintosh Edition Manager subscribers of this object automatically, whenever it is edited.

### Drawing Objects

#### Drawing Objects in Word 6.0/95 RTF

Drawing objects and the drawing primitives enumerated within drawing object groups use the following syntax:

<do>	'{\*' \do <dohead> <dpinfo>}'
<dohead>	<dobx> <doby> <dodhgt> <dolock>?
<dobx>	\dobxpage   \dobxcolumn   \dobxmargin
<doby>	\dobypage   \dobypara   \dobymargin
<dodhgt>	\dodhgt
<dolock>	\dolock
<dpinfo>	<dpgroup>   <dpcallout>   <dpsimple>
<dpgroup>	\dpgroup \dpcount <dphead> <dpinfo>+ \dpndgroup <dphead>
<dpcallout>	\dpcallout <cotype> <coangle>? <coaccent>? <cosmartattach>? <cobestfit>? <cominusx>? <cominusy>? <coborder>? <codescent>? \dpcoffset \dpcolength <dphead> <dppolyline> <dphead> <dpprops> <dptextbox> <dphead> <dpprops>
<dpsimple>	<dpsimpledpk> <dphead> <dpprops>
<dpsimpledpk>	<dpiline>   <dprect>   <dptextbox>   <dpellipse>   <dppolyline>   <dparc>
<dpiline>	\dpiline <dppt> <dppt>
<dprect>	\dprect (\dproundr)?
<dptextbox>	\dptxbx (\dptxlrtrb   \dptxtbtl   \dptxbtlr   \dptxlrtbv   \dptxtbrlv)? \dptxbxmar '{' \dptxbxtext <para>+'}'
<dpellipse>	\dpellipse
<dparc>	\dparc \dparcflipx? \dparcflipy?
<dppolyline>	\dppolyline (\dppolygon)? \dppolycount <dppt>+
<dppt>	\dpptx \dppty
<dphead>	\dpv \dpy \dpvsize \dpysize

**Note** In <dpgroup> the number of <dpinfo> occurrences is equal to the argument of **\dpcount**. This means that in <dppolyline> the number of <dppt> occurrence is equal to the argument of **\dppolycount**.

The following elements of the drawing-object syntax pertain specifically to callout objects:

<cotype>	\dpcotright   \dpcotsingle   \dpcotdouble   \dpcottriple
<coangle>	\dpcoa
<coaccent>	\dpcoaccent
<cosmartattach>	\dpcosmartattach
<cobestfit>	\dpcobestfit
<cominusx>	\dpcominusx
<cominusy>	\dpcominusy
<coborder>	\dpcoborder
<codescent>	\dpcodtop   \dpcodcenter   \dpcodbottom   \dpcodabs

The remaining elements of the drawing object syntax are properties applied to individual drawn primitives. These remaining objects use the following syntax:

<dpprops>	<lineprops>? <fillprops>? <endstylestart>? <endstyleend>? <shadow>?
<lineprops>	<linestyle> <linecolor> <b>\dplinew</b>
<linestyle>	\dplinesolid   \dplinehollow   \dplinedash   \dplinedot   \dplinedado   \dplinedadodo
<linecolor>	<linegray>   <linergb>
<linegray>	\dplinegray
<linergb>	\dplinecor \dplinecog \dplinecob<linepal>?
<linepal>	\dplinepal
<fillprops>	<fillcolorfg> <fillcolorbg> <b>\dpfillpat</b>
<fillcolorfg>	<fillfggray>   <fillfgrgb>
<fillfggray>	\dpfillfggray
<fillfgrgb>	\dpfillfgcr \dpfillfgcg \dpfillfgcb<fillfgpal>?
<fillfgpal>	\dpfillfgpal
<fillcolorbg>	<fillbggray>   <fillbgrgb>
<fillbggray>	\dpfillbggray
<fillbgrgb>	\dpfillbgcr \dpfillbgcg \dpfillbgcb<fillbgpal>?
<fillbgpal>	\dpfillbgpal
<endstylestart>	<arrowstartfill> <b>\dpastartl \dpastartw</b>
<arrowstartfill>	\dpastartsol   \dpastarthol
<endstyleend>	<arrowendfill> <b>\dpaendl \dpaendw</b>
<arrowendfill>	\dpaendsol   \dpaendhol
<shadow>	\dpshadow \dpshadx \dpshady

The following table describes the control words for the drawing object group. All color values are **RGB** values from 0 through 255. All distances are in twips. All other values are as indicated.



<b>Control word</b>	<b>Meaning</b>
<code>\do</code>	Indicates a drawing object is to be inserted at this point in the character stream. This is a destination control word.
<code>\dolock</code>	The drawing object's anchor is locked and cannot be moved.
<code>\dobxpage</code>	The drawing object is page relative in the x-direction.
<code>\dobxcolumn</code>	The drawing object is column relative in the x-direction.
<code>\dobxmargin</code>	The drawing object is margin relative in the x-direction.
<code>\dobypage</code>	The drawing object is page relative in the y-direction.
<code>\dobypara</code>	The drawing object is paragraph relative in the y-direction.
<code>\dobymargin</code>	The drawing object is margin relative in the y-direction.
<code>\dodhgtN</code>	The drawing object is positioned at the numeric position of the z-ordering.

---

### **Drawing Primitives**

<code>\dpgroup</code>	Begin group of drawing primitives.
<code>\dpcountN</code>	Number of drawing primitives in the current group.
<code>\dpenggroup</code>	End group of drawing primitives.
<code>\dparc</code>	Arc drawing primitive.
<code>\dpcallout</code>	Callout drawing primitive, which consists of both a polyline and a text box.
<code>\dpellipse</code>	Ellipse drawing primitive.
<code>\dpline</code>	Line drawing primitive.
<code>\dppolygon</code>	Polygon drawing primitive (closed polyline).
<code>\dppolyline</code>	Polyline drawing primitive.
<code>\dprect</code>	Rectangle drawing primitive.
<code>\dptxbx</code>	Text box drawing primitive.

---

### **Position and Size**

<code>\dpxN</code>	X-offset of the drawing primitive from its anchor.
<code>\dpysizeN</code>	X-size of the drawing primitive.
<code>\dpyN</code>	Y-offset of the drawing primitive from its anchor.
<code>\dpysizeN</code>	Y-size of the drawing primitive.

---

### **Callouts**

<code>\dpcoaN</code>	Angle of callout's diagonal line is restricted to one of the following: 0, 30, 45, 60, or 90. If this control word is absent, the callout has an arbitrary angle, indicated by the coordinates of its primitives.
<code>\dpcoaccent</code>	Accent bar on callout (vertical bar between polyline and text box).
<code>\dpcobestfit</code>	Best fit callout (x-length of each line in callout is similar).
<code>\dpcoborder</code>	Visible border on callout text box.
<code>\dpcodabs</code>	Absolute distance-attached polyline.
<code>\dpcodbottom</code>	Bottom-attached polyline.
<code>\dpcodcenter</code>	Center-attached polyline.
<code>\dpcodtop</code>	Top-attached callout.
<code>\dpcodescentN</code>	Descent of the callout
<code>\dpcolengthN</code>	Length of callout.
<code>\dpcominusx</code>	Text box falls in quadrants II or III relative to polyline origin.
<code>\dpcominusy</code>	Text box falls in quadrants III or IV relative to polyline origin.

Control word	Meaning
<code>\dpcoffset</code> <i>N</i>	Offset of callout. This is the distance between the end of the polyline and the edge of the text box.
<code>\dpcosmarta</code>	Auto-attached callout. Polyline will attach to either the top or bottom of the text box depending on the relative quadrant.
<code>\dpcotdouble</code>	Double line callout.
<code>\dpcotright</code>	Right angle callout.
<code>\dpcotsingle</code>	Single line callout.
<code>\dpcottriple</code>	Triple line callout.

---

#### Text Boxes and Rectangles

<code>\dptxbxmar</code> <i>N</i>	Internal margin of the text box.
<code>\dptxbxtext</code>	Group that contains the text of the text box.
<code>\dptxlr<sub>tb</sub></code>	Text box flows from left to right and top to bottom (default).
<code>\dptxtbr<sub>l</sub></code>	Text box flows from right to left and top to bottom.
<code>\dptxbt<sub>lr</sub></code>	Text box flows from left to right and bottom to top.
<code>\dptxlrtb<sub>v</sub></code>	Text box flows from left to right and top to bottom, vertically.
<code>\dptxtbrl<sub>v</sub></code>	Text box flows from right to left and top to bottom, vertically.
<code>\dproundr</code>	Rectangle is a round rectangle.

---

#### Lines and Polylines

<code>\dpptx</code> <i>N</i>	X-coordinate of the current vertex (only for lines and polylines). The coordinate order for a point must be x, y.
<code>\dppty</code> <i>N</i>	Y-coordinate of the current vertex (only for lines and polylines). The coordinate order for a point must be x, y.
<code>\dppolycount</code> <i>N</i>	Number of vertices in a polyline drawing primitive.

---

#### Arcs

<code>\dparcflipx</code>	This indicates that the end point of the arc is to the right of the start point. Arcs are drawn counter-clockwise.
<code>\dparcflipy</code>	This indicates that the end point of the arc is below the start point. Arcs are drawn counter-clockwise.

---

#### Line Style

<code>\dplinecob</code> <i>N</i>	Blue value for line color.
<code>\dplinecog</code> <i>N</i>	Green value for line color.
<code>\dplinecor</code> <i>N</i>	Red value for line color.
<code>\dplinepal</code>	Render line color using the <b>PALETTERGB</b> macro instead of the <b>RGB</b> macro in Windows.
<code>\dplinedado</code>	Dash-dotted line style.
<code>\dplinedadodo</code>	Dash-dot-dotted line style.
<code>\dplinedash</code>	Dashed line style.
<code>\dplinedot</code>	Dotted line style.
<code>\dplinegray</code> <i>N</i>	Grayscale value for line color (in half-percentages).
<code>\dplinehollow</code>	Hollow line style (no line color).
<code>\dplinesolid</code>	Solid line style.
<code>\dplinelw</code> <i>N</i>	Thickness of line (in twips).

---

#### Arrow Style

<code>\dpaendhol</code>	Hollow end arrow (lines only).
-------------------------	--------------------------------

Control word	Meaning
\dpaendl <i>N</i>	Length of end arrow, relative to pen width: 1 Small 2 Medium 3 Large
\dpaendsol	Solid end arrow (lines only).
\dpaendw <i>N</i>	Width of end arrow, relative to pen width: 1 Small 2 Medium 3 Large
\dpastarthol	Hollow start arrow (lines only).
\dpastartl <i>N</i>	Length of start arrow, relative to pen width: 1 Small 2 Medium 3 Large
\dpastartsol	Solid start arrow (lines only).
\dpastartw <i>N</i>	Width of start arrow, relative to pen width: 1 Small 2 Medium 3 Large
<b>Fill Pattern</b>	
\dpfillbgcb <i>N</i>	Blue value for background fill color.
\dpfillbgcg <i>N</i>	Green value for background fill color.
\dpfillbgcr <i>N</i>	Red value for background fill color.
\dpfillbgpal	Render fill background color using the <b>PALETTERGB</b> macro instead of the <b>RGB</b> macro in Windows.
\dpfillbggray <i>N</i>	Grayscale value for background fill (in half-percentages).
\dpfillfgcb <i>N</i>	Blue value for foreground fill color.
\dpfillfgcg <i>N</i>	Green value for foreground fill color.
\dpfillfgcr <i>N</i>	Red value for foreground fill color.
\dpfillfgpal	Render fill foreground color using the <b>PALETTERGB</b> macro instead of the <b>RGB</b> macro in Windows.
\dpfillfggray <i>N</i>	Grayscale value for foreground fill (in half-percentages).
\dpfillpat <i>N</i>	Index into a list of fill patterns. See the fill pattern table that follows for list.
<b>Shadow</b>	
\dpshadow	Current drawing primitive has a shadow.
\dpshadx <i>N</i>	X-offset of the shadow.
\dpshady <i>N</i>	Y-offset of the shadow.

The following values are available for specifying fill patterns in drawing objects with the **\dpfillpat** control word.

Value	Fill pattern
0	Clear (no pattern)
1	Solid (100%)
2	5%
3	10%
4	20%
5	25%
6	30%
7	40%
8	50%
9	60%
10	70%
11	75%
12	80%
13	90%
14	Dark horizontal lines
15	Dark vertical lines
16	Dark left-diagonal lines (\\)
17	Dark right-diagonal lines (//)
18	Dark grid lines
19	Dark trellis lines
20	Light horizontal lines
21	Light vertical lines
22	Light left-diagonal lines (\\)
23	Light right-diagonal lines (//)
24	Light grid lines
25	Light trellis lines

### Word 97 through Word 2003 RTF for Drawing Objects (Shapes)

#### Basic Format

The basic format for drawing objects in RTF is as follows:

```
{ \shp ..... { \*\shpinst { \spp { \sn ..... } { \sp ..... }
} }

{ \shprslt ..... } }
```

The first destination (**\shp**) is always present. This control word groups everything related to a shape together. Following the destination change is basic information regarding the shape. The following keywords with values can appear in any order after the “{ \shp” control word.

Control word	Meaning
<b>Shape Keywords</b>	
<code>\shpleft<math>N</math></code>	Specifies position of shape from the left of the anchor. The value <b><math>N</math></b> is in twips.
<code>\shptop<math>N</math></code>	Specifies position of shape from the top of the anchor. The value <b><math>N</math></b> is in twips.
<code>\shpbottom<math>N</math></code>	Specifies position of shape from the bottom of the anchor. The value <b><math>N</math></b> is in twips.
<code>\shpright<math>N</math></code>	Specifies position of shape from the right of the anchor. The value <b><math>N</math></b> is in twips.
<code>\shplid<math>N</math></code>	A number that is unique to each shape. This keyword is primarily used for linked text boxes. The value <b><math>N</math></b> is a long integer.
<code>\shpz<math>N</math></code>	Describes the z-order of the shape. It starts at 0 for the shape that is furthest from the top, and proceeds to the top most shape ( <b><math>N</math></b> ). The shapes that appear inside the header document will have a separate z-order, compared to the z-order of the shapes in the main document. For instance, both the back-most shape in the header and the back-most main-document shape will have a z-order of 0.
<code>\shpfhdr<math>N</math></code>	Set to 0 if the shape is in the main document. Set to 1 if the shape is in the header document.
<code>\shpbxpage</code>	The shape is positioned relative to the page in the x (horizontal) direction.
<code>\shpbxmargin</code>	The shape is positioned relative to the margin in the x (horizontal) direction.
<code>\shpbxcolumn</code>	The shape is positioned relative to the column in the x (horizontal) direction.
<code>\shpbxignore</code>	Ignore <code>\shpbxpage</code> , <code>\shpbxmargin</code> , and <code>\shpbxcolumn</code> , in favor of <code>\posrelh</code> . The ignored properties will be written for backward compatibility with older readers that do not understand <code>\posrelh</code> .
<code>\shpbypage</code>	The shape is positioned relative to the page in the y (vertical) direction.
<code>\shpbymargin</code>	The shape is positioned relative to the margin in the y (vertical) direction.
<code>\shpbypara</code>	The shape is positioned relative to the paragraph in the y (vertical) direction.
<code>\shpbyignore</code>	Ignore <code>\shpbypage</code> , <code>\shpbymargin</code> , and <code>\shpbxpara</code> , in favor of <code>\posrelh</code> . The ignored properties will be written for backward compatibility with older readers that do not understand <code>\posrelh</code> .
<code>\shpwr<math>N</math></code>	Describes the type of wrap for the shape: <ol style="list-style-type: none"> <li>1 Wrap around top and bottom of shape (no text allowed beside shape)</li> <li>2 Wrap around shape</li> <li>3 None (wrap as if shape isn't present)</li> <li>4 Wrap tightly around shape</li> <li>5 Wrap text through shape</li> </ol>
<code>\shpwrk<math>N</math></code>	Wrap on side (for types 2 and 4 for <code>\shpwr<math>N</math></code> ): <ol style="list-style-type: none"> <li>0 Wrap both sides of shape</li> <li>1 Wrap left side only</li> <li>2 Wrap right side only</li> <li>3 Wrap only on largest side</li> </ol>
<code>\shpfblwtxt<math>N</math></code>	Describes relative z-ordering: <ol style="list-style-type: none"> <li>0 Text is below shape</li> <li>1 Shape is below text</li> </ol>
<code>\shplockanchor</code>	Lock anchor for a shape.
<code>\shptxt</code>	Text for a shape. The text must follow all of the other properties for the shape (inside the <code>\shpinst</code> destination) and must appear in the following format: <pre>{ \shptxt Any valid RTF for the current text box }</pre> <p><b>Note</b> For linked text boxes, the first text box of the linked set has the entire story, so all following text boxes will not have a <code>\shptxt</code> field.</p>
<code>\shprslt</code>	This is where the Word 6.0 and Word 95 drawn object RTF can be placed.

Control word	Meaning
\shpggrp	<p>Specifies a group shape. The parameters following this keyword are the same as those following <b>\shp</b>. The order of the shapes inside a group is from bottom to top in z-order.</p> <p>Inside of a <b>\shpggrp</b>, no { \shprslt .... } fields would be generated (that is, only the root-level shape can have a <b>\shprslt</b> field (this field describes the entire group). For example:</p> <pre>{ \shpggrp ..... { \shp ..... (and all sub-items as usual) }                         { \shp .....(and all sub-items as usual) }</pre> <p><b>Note</b> { \shpggrp ..... } can be substituted for { \shp ..... } in order to create groups inside of groups.</p>
\svb	<p>Destination containing binary ink information. Used within the value of the <b>pInkData</b> property:</p> <p>Example:</p> <pre>{\sp{\sn pInkData}{\sv {\*\svb00ad021d04ba06dc02012000680c0000000000c00000000000004658cf548ae697c54f8f0 6f8bad2e19b22032164063e80440ff00000481144ff0145351b0200adff46351b0200adff570d0000 000503380b65191f320800b07102e4d4c44333090096970102a0d6c443380800fe03000000807f 15673d33406d3a33400 }}</pre>

With the exception of **\shplid**, the control words listed in the preceding table do not apply for shapes that are within a group. For more information about groups, see the [Introduction](#) section of this specification.

Control word	Meaning
\background	<p>Specifies the document background. This is a destination control word. It contains the { \shp keyword and all the shape properties.</p>

## Drawing Object Properties

The bulk of a drawing object is defined as a series of properties. The { \shp ..... control word is followed by { \\*\shpinst Following the { \\*\shpinst is a list of all the properties of a shape. Each of the properties is in the following format:

```
{ \sp { \sn PropertyName } { \sv PropertyValueInformation } }
```

The control word for the drawing object property is **\sp**. Each property has a pairing of the name (**\sn**) and value (**\sv**) control words placed in the shape property group. For example, the vertical flip property is represented as:

```
{\sp{\sn fFlipV}{\sv 1}}
```

Here, the name of the property is **fFlipV** and the value is 1, which indicates **True**. All shape properties follow this basic format. Only properties that have been explicitly set for a shape are written out in RTF. Other properties assume the default values (a property may be set to the default value explicitly).

The following table describes all the names of properties for drawing objects along with their corresponding value type.

Property	Meaning	Type of value	Default
<b>Position</b>			
posh	Horizontal alignment: 1 Left 2 Center 3 Right 4 Inside 5 Outside This overrides the absolute position specified in <b>\shpleftN</b> and <b>\shprightN</b> .	Not applicable	Absolute position as specified in <b>\shpleftN</b> and <b>\shprightN</b> .
posrelh	Position horizontally relative to: 0 Margin 1 Page 2 Column 3 Character	Not applicable	2, if <b>posh</b> is present
posv	Vertical alignment: 1 Center 2 Column 3 Bottom 4 Inside 5 Outside This overrides the absolute position specified in <b>\shptopN</b> and <b>\shpbottmN</b> .	Not applicable	Absolute position as specified in <b>\shptopN</b> and <b>\shpbottmN</b> .
posrelv	Position horizontally relative to: 0 Margin 1 Page 2 Paragraph 3 Line 2 is the assumed value if the property is not explicitly written.	Not applicable	2, if <b>posv</b> is present
fLayoutInCell	Allows shape to anchor and position inside table cells.	Boolean	FALSE
fAllowOverlap	Allows shape to overlap other shapes unless it is a shape with None wrapping ( <b>\shpwr3</b> ), in which case it can always overlap an object with other types of wrapping and vice-versa.	Boolean	TRUE
fChangePage	Anchor may change page.	Boolean	FALSE
fPseudoInline	The shape is pseudo-inline, meaning it behaves like an inline image as far as positioning goes, but has the features of shapes.	Boolean	FALSE
fUseShapeAnchor	Use shape anchor	Boolean	FALSE

**Object Type**

fIsBullet	Indicates whether a picture was inserted as a picture bullet.	Boolean	FALSE
Rotation	Rotation of the shape.	Angle	0
fFlipV	Vertical flip, applied after the rotation.	Boolean	FALSE
fFlipH	Horizontal flip, applied after the rotation.	Boolean	FALSE
ShapeType	See below for values. 0 indicates user-drawn freeforms and polygons.	Not applicable	Not applicable
wzName	Shape name (only set through Microsoft® Visual® Basic for Applications).	String	NULL
pWrapPolygonVertices	Points of the text wrap polygon.	Array	NULL
dxWrapDistLeft	Left wrapping distance from text.	EMU	114,305
dyWrapDistTop	Top wrapping distance from text.	EMU	0
dxWrapDistRight	Right wrapping distance from text.	EMU	114,305
dyWrapDistBottom	Bottom wrapping distance from text.	EMU	0
fBehindDocument	Place the shape behind text.	Boolean	FALSE
fIsButton	A button shape (That is, clicking performs an action). Set for shapes with attached hyperlinks or macros.	Boolean	FALSE
fHidden	Do not display or print (only set through Visual Basic for Applications).	Boolean	FALSE
pihlShape	The hyperlink in the shape.	Hyperlink	NULL
fArrowheadsOK	Allow arrowheads.	Boolean	FALSE
fBackground	This is the background shape.	Boolean	FALSE
fDeleteAttachedObject	Delete object attached to shape.	Boolean	FALSE
fEditedWrap	The shape's wrap polygon has been edited.	Boolean	FALSE
fHidden	Do not display.	Boolean	FALSE
fHitTestFill	Hit test fill.	Boolean	TRUE
fHitTestLine	Hit test lines.	Boolean	TRUE
fInitiator	Set by the solver.	Boolean	NULL
fNoFillHitTest	Hit test a shape as though filled.	Boolean	FALSE
fNoHitTestPicture	Do not hit test the picture.	Boolean	FALSE
fNoLineDrawDash	Draw a dashed line if no line exists.	Boolean	FALSE
fOleIcon	For OLE objects, indicates whether the object is in icon form or not.	Boolean	FALSE
fOnDbClickNotify	Notify client on a double click.	Boolean	FALSE
fOneD	1D adjustment.	Boolean	FALSE
fPreferRelativeResize	For UI only. Prefer relative resizing.	Boolean	FALSE
fPrint	Print this shape.	Boolean	TRUE
hspMaster	Master shape.	Shape ID	NULL
hspNext	ID of the next shape (used by Word for linked text boxes).	Shape ID	NULL
xLimo	Defines the limo stretch point.	Long integer	Not applicable
yLimo	Defines the limo stretch point.	Long integer	Not applicable



**Lock**

fLockRotation	Lock rotation.	Boolean	FALSE
fLockAspectRatio	Lock aspect ratio.	Boolean	FALSE
fLockAgainstSelect	Lock against selection.	Boolean	FALSE
fLockCropping	Lock against cropping.	Boolean	FALSE
fLockVertices	Lock against edit mode.	Boolean	FALSE
fLockText	Lock text against editing.	Boolean	FALSE
fLockAdjustHandles	Lock adjust handles.	Boolean	FALSE
fLockAgainstGrouping	Lock against grouping.	Boolean	FALSE

fLockShapeType	Lock the shape type (don't allow Change Shape).	Boolean	FALSE
<b>Text Box</b>			
dxTextLeft	Left internal margin of the text box.	EMU	91,440
dyTextTop	Top internal margin of the text box.	EMU	45,720
dxTextRight	Right internal margin of the text box.	EMU	91,440
dyTextBottom	Bottom internal margin of the text box.	EMU	45,720
WrapText	Wrap text at shape margins:	Not applicable	0
	0 Square		
	1 Tight		
	2 None		
	3 Top bottom		
	4 Through		
anchorText	Text anchor point:	Not applicable	0
	0 Top		
	1 Middle		
	2 Bottom		
	3 Top centered		
	4 Middle centered		
	5 Bottom centered		
	6 Bottom centered baseline		
txfITextFlow	Text flow:	Not applicable	0
	0 Horizontal non-ASCII font		
	1 Top to bottom ASCII font		
	2 Bottom to top non-ASCII font		
	3 Top to bottom non-ASCII font		
	4 Horizontal ASCII font		
cdirFont	Font rotation:	Direction	0
	0 Right		
	1 Down		
	2 Left		
	3 Up		
fAutoTextMargin	Use host's margin calculations.	Boolean	FALSE
scaleText	Text zoom and scale.	Long integer	0
ITxid	ID for the text. The value is determined by the host.	Long integer	0
fRotateText	Rotate text with shape.	Boolean	FALSE
fSelectText	TRUE if single click selects text, FALSE if two clicks select text.	Boolean	TRUE
fFitShapeToText	Adjust shape to fit text size.	Boolean	FALSE
fFitTextToShape	Adjust text to fit shape size.	Boolean	FALSE

**Ink Information**

pInkData	The Ink information for the object, as a binary blob contained inside the \*\svb destination.	Not Applicable	NULL
fInsetPenOK	Inset pen.	Boolean	FALSE
fArrowheadsOK	Arrowheads	Boolean	FALSE
fLeftInsetPenOK	Left inset	Boolean	FALSE
fRightInsetPenOK	Right inset	Boolean	FALSE
fTopInsetPenOK	Top inset	Boolean	FALSE
fBottomInsetPenOK	Bottom inset	Boolean	FALSE
fColumnInsetPenOK	Column inset	Boolean	FALSE
fColumnHitTestLine	Column hit test line	Boolean	FALSE

**WordArt Effect**

gtextUNICODE	Unicode text string.	String	NULL
gtextAlign	Alignment on curve: 0        Stretch each line of text to fit width 1        Center text on width 2        Left justify 3        Right justify 4        Spread letters out to fit width 5        Spread words out to fit width	Not applicable	1
gtextSize	Default point size.	Fixed	2,359,296
gtextSpacing	Adjust the spacing between characters (1.0 is normal).	Fixed	65,536
gtextFont	Font name.	String	NULL
fGtext	<b>True</b> if the text effect properties ( <b>gtext*</b> ) are used. <b>False</b> if these properties are ignored.	Boolean	FALSE
gtextFVertical	If available, an @ font should be used. Otherwise, rotate individual characters 90 degrees counter-clockwise.	Boolean	FALSE
gtextFKern	Use character pair kerning if it is supported by the font.	Boolean	FALSE
gtextFTight	Adjust the spacing between characters rather than the character advance by the <b>gtextSpacingratio</b> .	Boolean	FALSE
gtextFStretch	Stretch the text to fit the shape.	Boolean	FALSE
gtextFShrinkFit	When laying out the characters, consider the glyph bounding box rather than the nominal font character bounds.	Boolean	FALSE
gtextFBestFit	Scale text laid out on a path to fit the path.	Boolean	FALSE
gtextFNormalize	Stretch individual character heights independently to fit.	Boolean	FALSE
gtextFDxMeasure	When laying out characters, measure the distances along the x-axis rather than along the path.	Boolean	FALSE
gtextFBold	Bold font (if available).	Boolean	FALSE
gtextFItalic	Italic font (if available).	Boolean	FALSE
gtextFUnderline	Underline font (if available).	Boolean	FALSE
gtextFShadow	Shadow font (if available).	Boolean	FALSE
gtextFSmallcaps	Small caps font (if available).	Boolean	FALSE
gtextFStrikethrough	Strikethrough font (if available).	Boolean	FALSE
fGtextOK	Text effect (WordArt) supported.	Boolean	FALSE
gtextFReverseRows	Reverse row order.	Boolean	FALSE
gtextRTF	RTF text string.	String	NULL

**Picture**

cropFromTop	Top cropping percentage.	Fixed	0
cropFromBottom	Bottom cropping percentage.	Fixed	0
cropFromLeft	Left cropping percentage.	Fixed	0
cropFromRight	Right cropping percentage.	Fixed	0
pib	Binary picture data.	Picture	NULL
pibName	Picture file name that is used to link to file pictures.	String	NULL
pibFlags	Flags for linked pictures: 0 No links (default) 10 Link to file; save with document 14 Link to file; do not save picture with document	Not applicable	0
pictureTransparent	Transparent color.	Color	0
pictureContrast	Contrast setting.	Fixed	65,536
PictureBrightness	Brightness setting.	Fixed	0
pictureGamma	Gamma correction setting.	Fixed	0
pictureGray	Display grayscale.	Boolean	0
pictureBiLevel	Display bi-level.	Boolean	0
pibPrint	Blip to display when printing.	Picture	NULL
pibPrintFlags	Flags: 0 No links (default) 10 Link to file; save with document 14 Link to file; do not save picture with document	Not applicable	0
pibPrintName	Blip file name.	String	NULL
pictureActive	Server is active (OLE objects only).	Boolean	FALSE
pictureDbICrMod	Modification used if shape has double shadow.	Color	No change
pictureFillCrMod	Modification for BW views.	Color	Undefined
pictureId	Host-defined ID for OLE objects (usually a pointer).	Long integer	0
pictureLineCrMod	Modification for BW views.	Color	Undefined

**Geometry**

geoLeft	Left edge of the bounds of a user-drawn shape.	Long integer	0
geoTop	Top edge of the bounds of a user-drawn shape.	Long integer	0
geoRight	Right edge of the bounds of a user-drawn shape.	Long integer	21,600
geoBottom	Bottom edge of the bounds of a user-drawn shape.	Long integer	21,600
pVertices	The points of the shape.	Array	NULL
pSegmentInfo	The segment information.	Array	NULL
pFragments	Fragments are optional, additional parts to the shape. They allow the shape to contain multiple paths and parts. This property lists the fragments of the shape.	Array	NULL
pGuides	Guide formulas—an array of elements that correspond to the VML <formulas> element, where each array entry is a single <f> entry.	Array	NULL
pInscribe	The inscribed rectangle definition.	Array	NULL
pAdjustHandles	The adjust handle definitions - an array of values corresponding to the VML <handles> element.	Array	NULL
adjustValue	First adjust value from an adjust handle. The interpretation varies with the shape type. Adjust values alter the geometry of the shape in smart ways.	Integer	0
adjust2Value	Second adjust value.	Long integer	0
adjust3Value	Third adjust value.	Long integer	0
adjust4Value	Fourth adjust value.	Long integer	0
adjust5Value	Fifth adjust value.	Long integer	0
adjust6Value	Sixth adjust value.	Long integer	0
adjust7Value	Seventh adjust value.	Long integer	0
adjust8Value	Eighth adjust value.	Long integer	0
adjust9Value	Ninth adjust value.	Long integer	0
adjust10Value	Tenth adjust value.	Long integer	0

## Grouped Shapes

fRelChangePage	Anchor may change page.	Boolean	FALSE
fRelFlipH	Vertical flip of an object inside a group, relative to its container and applied after the rotation.	Boolean	FALSE
fRelFlipV	Horizontal flip of an object inside a group, relative to its container and applied after the rotation.	Boolean	FALSE
groupBottom	Defines the height of the group rectangle, but does not necessarily indicate position on the page. The difference between groupBottom and groupTop should match the dimensions specified by <b>\shptop</b> and <b>\shpbottom</b> .	Twips	20,000
groupLeft	Defines the width of the group rectangle, but does not necessarily indicate position on the page. The difference between groupLeft and groupRight should match the dimensions specified by <b>\shpleft</b> and <b>\shpright</b> .	Twips	0
groupRight	See meaning for <b>groupLeft</b> .	Twips	20,000
groupTop	See meaning for <b>groupBottom</b> .	Twips	0
relBottom	Defines the bottom of a shape within its parent shape (used for shapes in a group). The measurement is relative to the position of the parent group or drawing.	Twips	1
relLeft	Defines the left of a shape within its parent shape (used for shapes in a group). The measurement is relative to the position of the parent group or drawing.	Twips	0
relRight	Defines the right of a shape within its parent shape (used for shapes in a group). The measurement is relative to the position of the parent group or drawing.	Twips	1
relRotation	Represents the information stored in the site of a shape, which defines the size and location of the shape in the parent group or drawing. The coordinates are relative to the position of the parent group or drawing. The units are relative to the m_rcg of the parent.	Fixed	0
relTop	Defines the top of a shape within its parent shape (used for shapes in a group). The measurement is relative to the position of the parent group or drawing.	Twips	0
lidRegroup	Regroup ID.	Long integer	0

## Fill

fillType	Type of fill:	Fill type	0
	0 Solid color		
	1 Pattern (bitmap)		
	2 Texture (pattern with its own color map)		
	3 Picture centered in the shape		
	4 Shade from start to end points		
	5 Shade from bounding rectangle to end point		
	6 Shade from shape outline to end point		
	7 Shade using the fillAngle		
fillColor	Foreground color.	Color	White
fillOpacity	Opacity.	Fixed	65,536
fillBackColor	Background color.	Color	White
fillBackOpacity	Opacity for shades only.	Fixed	65,536
fillBlip	Pattern or texture picture for the fill.	Picture	NULL
fillBlipName	Picture file name for custom fills.	String	NULL
fillblipflags	Flags for fills:	Not applicable	0
	0 No links (default)		
	10 Link to file; save picture with document		
	14 Link to file; do not save picture with document		
fillWidth	Expand the pattern or tile to approximately this size.	EMU	0
fillHeight	Expand the pattern or tile to approximately this size.	EMU	0
fillAngle	Fade angle specified in 1/65536ths of a degree.	Fixed	0
fillFocus	Linear shaded fill focus percent.	Not applicable	0
fillToLeft	The <b>fillToLeft</b> , <b>fillToTop</b> , <b>fillToRight</b> , and <b>fillToBottom</b> values define the "focus" rectangle for concentric shapes; they are specified as a fraction of the outer rectangle of the shade.	Fixed	0
fillToTop	See meaning for <b>fillToLeft</b> .	Fixed	0
fillToRight	See meaning for <b>fillToLeft</b> .	Fixed	0
fillToBottom	See meaning for <b>fillToLeft</b> .	Fixed	0
fillShadeColors	Custom or preset color ramps for graduated fills on shapes.	Array	NULL
fillOriginX	When a textured fill is used, the texture may be aligned with the shape ( <b>fillShape</b> )—if this is done, the default alignment is to the top left. The values <b>fillOriginY</b> , <b>fillShapeOriginX</b> , and <b>fillShapeOriginY</b> allow an arbitrary position in the texture (relative to the top left proportion of the texture's height and width) to be aligned with an arbitrary position on the shape (relative to the top-left proportion of the width and height of the bounding box).	Fixed	0
	<b>Note</b> all these values are fixed point fractions of the relevant width or height.		
fillOriginY	See meaning for <b>fillOriginX</b> .	Fixed	0
fillShapeOriginX	See meaning for <b>fillOriginX</b> .	Fixed	0
fillShapeOriginY	See meaning for <b>fillOriginX</b> .	Fixed	0



fFilled	The shape is filled.	Boolean	TRUE
fillCrMod	Modification for BW views	Color	Undefined
fillDztype	Measurement type:	Measurement type	0
	0 Default size, ignore the values		
	1 Values are in EMUs		
	2 Values are in pixels		
	3 Values are fixed fractions of the shape size		
	4 Aspect ratio is fixed		
	5 EMUs, fixed aspect ratio		
	6 Pixels, fixed aspect ratio		
	7 Proportion of shape, fixed aspect ratio		
	8 Aspect ratio is fixed, favor larger size		
	9 EMUs, fixed aspect ratio		
	10 Pixels, fixed aspect ratio		
	11 Proportion of shape, fixed aspect ratio		
fillRectBottom	For shaded fills, use the specified rectangle instead of the shape's bounding rectangle to define how large the fade will be.	EMU	0
fillRectLeft	For shaded fills, use the specified rectangle instead of the shape's bounding rectangle to define how large the fade will be.	EMU	0
fillRectRight	For shaded fills, use the specified rectangle instead of the shape's bounding rectangle to define how large the fade will be.	EMU	0
fillRectTop	For shaded fills, use the specified rectangle instead of the shape's bounding rectangle to define how large the fade will be.	EMU	0
fillShadeColors	Preset array of colors.	Array	NULL
fillShadePreset	Special shades.	Long integer	0
fillShadeType	Type of shading, if using a shaded (gradient) fill.	<a href="#">Shade</a> type	Default
fillShape	Register pattern on shape.	Boolean	TRUE
fillUseRect	Use the large rectangle.	Boolean	FALSE
fillWidth	Size of a metafile texture.	EMU	0
fFillOK	Define whether the shape can be filled through the user interface (UI) or Visual Basic for Applications.	Boolean	TRUE
fFillShadeShapeOK	If TRUE, a concentric shade (repeatedly drawing the shape at a decreasing size) is permitted for this path. If FALSE, a concentric shade is not permitted (generally because the repeated drawing will overwrite the shape boundary).	Boolean	FALSE

**Line**

lineColor	Color of the line.	Color	Black
lineBackColor	Background color of the pattern.	Color	White
lineType	Type of line: 0 Solid fill with the line color 1 Patterned fill with the <b>lineFillBlip</b> 2 Textured fill with the <b>lineFillBlip</b> 3 Picture fill with the <b>lineFillBlip</b>	Line type	0
lineFillBlip	Pattern for the line.	Picture	NULL
lineFillBlipFlags	Flags for patterned lines: 0 No links (default) 10 Link to file; save picture with document 14 Link to file; do not save picture with document	Not applicable	0
lineFillWidth	Width of the pattern.	EMU	0
lineFillHeight	Height of the pattern.	EMU	0
lineWidth	Width of the line.	EMU	9,525 (0.75pt)
lineStyle	Line style: 0 Single line (of width <b>lineWidth</b> ) 1 Double lines of equal width 2 Double lines, one thick, one thin 3 Double lines, reverse order 4 Three lines, thin, thick, thin	Line style	0
lineDashing	Dashing: 0 Solid line 1 Dashed line (Windows) 2 Dotted line (Windows) 3 Dash-dotted line (Windows) 4 Dash-dot-dotted line (Windows) 6 Dotted line 7 Dashed line 8 Long dashed line 9 Dash-dotted line 10 Long dash-dotted line 11 Long dash-dot-dotted line	Dash style	0
lineStartArrowhead	Start arrow type: 0 Nothing 1 Arrow 2 Stealth arrow 3 Diamond 4 Oval 6 Open arrow 7 Chevron arrow 8 Double chevron arrow	Arrow type	0

lineEndArrowhead	End arrow type (for acceptable values see meaning for <b>lineStartArrowhead</b> ).	Arrow type	0
lineStartArrowWidth	Start arrow width: 0      Narrow 1      Medium 2      Wide	Arrow width	1
lineStartArrowLength	Start arrow length: 0      Short 1      Medium 2      Long	Arrow length	1
lineEndArrowWidth	End arrow width (for acceptable values see meaning for <b>lineStartArrowWidth</b> ).	Arrow width	1
lineEndArrowLength	End arrow length (for acceptable values see meaning for <b>lineStartArrowLength</b> ).	Arrow length	1
fLine	Has a line.	Boolean	TRUE
lineBackColor	Background color.	Color	white
lineCrMod	Modification for Black and White views.	Color	undefined
lineDashStyle	Line dash style.	Array	NULL
lineEndCapStyle	Line cap style for shape: 0      Round 1      Square 2      Flat	Line cap style	2
lineFillBlipName	Blip file name.	String	NULL
lineFillDztype	fillWidth/Height numbers: 0      Default size, ignore the values 1      Values are in EMUs 2      Values are in pixels 3      Values are fixed fractions of shape size 4      Aspect ratio is fixed 5      EMUs, fixed aspect ratio 6      Pixels, fixed aspect ratio 7      Proportion of shape, fixed aspect ratio 8      Aspect ratio is fixed, favor larger size 9      EMUs, fixed aspect ratio 10     Pixels, fixed aspect ratio 11     Proportion of shape, fixed aspect ratio	Measurement type	0
lineFillHeight	Size of a metafile texture.	EMU	0
lineJoinStyle	Line join style for shape: 0      Join edges by a straight line 1      Extend edges until they join 2      Draw an arc between the two edges	Line join style	2
lineMiterLimit	Ratio of width.	Fixed	524,288
fLineOK	Line style may be set.	Boolean	TRUE

## Shadow

shadowType	Type of shadow:	Not applicable	0
	0 Offset shadow		
	1 Double offset shadow		
	2 Rich perspective shadow (cast relative to shape)		
	3 Rich perspective shadow (cast in shape space)		
	4 Perspective shadow (cast in drawing space)		
	6 Emboss or engrave		
shadowColor	Foreground color.	Color	RGB (128,128,128)
shadowHighlight	Embossed color.	Color	RGB (203,203,203)
shadowOpacity	Opacity of the shadow.	Fixed	65,536
shadowOffsetX	Shadow offset toward the right.	EMU	0
shadowOffsetY	Shadow offset toward the bottom.	EMU	0
shadowSecondOffsetX	Double shadow offset toward the right.	EMU	25,400
shadowSecondOffsetY	Double shadow offset toward the bottom.	EMU	25,400
shadowScaleXToX	The <b>shadowScaleXToX</b> to <b>shadowWeight</b> define a 3x2 transform matrix that is applied to the shape to generate the shadow.	Fixed	65,536
shadowScaleYToX	See meaning for <b>shadowScaleXToX</b> .	Fixed	0
shadowScaleXToY	See meaning for <b>shadowScaleXToX</b> .	Fixed	0
shadowScaleYToY	See meaning for <b>shadowScaleXToX</b> .	Fixed	65,536
shadowPerspectiveX	See meaning for <b>shadowScaleXToX</b> .	Fixed	0
shadowPerspectiveY	See meaning for <b>shadowScaleXToX</b> .	Fixed	0
shadowWeight	See meaning for <b>shadowScaleXToX</b> .	Fixed	32,768
shadowOriginX	Defines the position of the origin relative to the center of the shape— this position is determined based on a proportion of the <i>rotated</i> shape width and height. The shape is rotated and then positioned such that the point is at (0,0) before the transformation is applied.	Fixed	0
ShadowOriginY	See meaning for <b>shadowOriginX</b> .	Fixed	0
fShadow	Turns the shadow on or off.	Boolean	FALSE
shadowCrMod	Modification for BW views.	Color	Undefined
fshadowObscured	Microsoft Excel 5 style shadow.	Boolean	FALSE
fShadowOK	Shadow may be set.	Boolean	TRUE

### 3-D Effects

c3DSpecularAmt	Specular amount for the material.	Fixed	0
c3DDiffuseAmt	Diffusion amount for the material.	Fixed	65,536
c3DShininess	Shininess of the material.	Long integer	5
c3DEdgeThickness	Specular edge thickness.	EMU	12,700
c3DExtrudeForward	Extrusion amount forward.	EMU	0
c3DExtrudeBackward	Extrusion amount backward.	EMU	457,200
c3DExtrusionColor	Color of the extrusion.	Color	
f3D	<b>True</b> if shape has a three-dimensional (3D) effect, <b>False</b> if it does not.	Boolean	FALSE
fc3DMetallic	<b>True</b> if shape uses metallic specularly, <b>False</b> if it does not.	Boolean	FALSE
fc3DUseExtrusionColor	Extrusion color is set explicitly.	Boolean	FALSE
fc3DLightFace	Light the face of the shape.	Boolean	TRUE
c3DYRotationAngle	Degrees about y-axis.  If <b>fc3DconstrainRotation</b> (a Boolean property which defaults to <b>True</b> ) is <b>True</b> , then the rotation is restricted to x-y rotation. In addition, the final rotation results from first rotating by <b>c3DYRotationAngle</b> degrees about the y-axis and then by <b>c3DXRotationAngle</b> degrees about the z-axis.  If <b>fc3DconstrainRotation</b> is <b>False</b> , then the final rotation results from a single rotation of <b>c3DrotationAngle</b> about the axis specified by <b>c3DrotationAxisX</b> , <b>c3DrotationAxisY</b> , and <b>c3DrotationAxisZ</b> .	Angle	0
c3DXRotationAngle	Degrees about x-axis.	Angle	0
c3DRotationAxisX	These keywords specify the rotation axis. Only their relative magnitudes matter.	Long integer	100
c3DRotationAxisY	See meaning for c3DYRotationAxisX.	Long integer	0
c3DRotationAxisZ	See meaning for c3DYRotationAxisX.	Long integer	0
c3DRotationAngle	The rotation about the axis (defined previously in the <b>c3DRotationAxisX</b> , <b>Y</b> , and <b>Z</b> parameter sections)	Angle	0
fc3DRotationCenterAuto	If <b>fc3DRotationCenterAuto</b> is <b>True</b> , then the rotation will be about the center of the 3-D bounding cube of the 3-D group; otherwise, the rotation center will be about <b>c3DRotationCenterX</b> , <b>c3DRotationCenterY</b> , and <b>c3DRotationCenterZ</b> .	Boolean	FALSE
c3DRotationCenterX	Rotation center (X).  The <b>X</b> and <b>Y</b> values are a 16.16 fraction of the geometry width and height, with (0,0) being at the center of the geometry. The <b>Z</b> value must be in absolute units (EMUs).	Fixed	0
c3DRotationCenterY	Rotation center (Y).  If <b>fc3DRotationCenterAuto</b> is <b>True</b> , then the rotation will be about the center of the 3-D bounding cube of the 3-D group; otherwise, the rotation center will be about <b>c3DRotationCenterX</b> , <b>c3DRotationCenterY</b> , and <b>c3DRotationCenterZ</b> .  The <b>X</b> values and <b>Y</b> values are a fraction of the geometry width and height, with (0,0) being at the center of the geometry. The <b>Z</b> value is in absolute units.	Fixed	0

c3DRotationCenterZ	See meaning for c3DRotationCenterY.	EMU	0
c3DRenderMode	0      Render with full detail 1      Render as a wire frame 2      Render a bounding cube	Long integer	Not applicable
c3DXViewpoint	X view point.	EMU	1,250,000
c3DYViewpoint	Y view point.	EMU	-1,250,000
c3DZViewpoint	Z view distance.	EMU	9,000,000
c3DOriginX	The following <b>c3DOriginY</b> and <b>c3DSkewAngle</b> values define the origin relative to the viewpoint origin measured.  These values are 16.16 numbers that specify the position of the origin within the shape bounding box, as multiples of the width and height of that bounding box and relative to the center (that is, they are displaced from the center). When these values are applied the actual transformed shape path is used, rather than the shape geometry (compare with the shadow and perspective values that work on the geometry bounding box, not the actual points). This means that a shape that extends outside the geometry bounding box (such as a text effect) is handled "correctly" for the calculation of the 3-D origin.	Fixed	32,768
c3DOriginY	See meaning for <b>c3DOriginX</b> .	Fixed	-32,768
c3DSkewAngle	Skew angle.	Fixed	-8,847,360
c3DSkewAmount	Percentage skew amount.	Long integer	50
c3DAmbientIntensity	Ambient intensity should be low (0 to .1) to avoid washed out appearance.	Fixed	20,000
c3DKeyX	Key light source direction. Values may be any number; only their relative magnitudes matter.	Long integer	50,000
c3DKeyY	See meaning for <b>c3DKeyX</b> .	Long integer	0
c3DKeyZ	See meaning for <b>c3DKeyX</b> .	Long integer	10,000
c3DKeyIntensity	Fixed point intensity. Theoretical maximum is 1, but may be higher.	Fixed	38,000
c3DFillX	Fill light source direction; only the relative magnitude matters. This direction defines a second light source arbitrarily called the "fill light." Generally this is positioned 90-180 degrees away from the key light and very roughly in front of the scene to fill in any harsh shadows. This fill is dim compared to the first light source. Theoretically it should be non-harsh, but harsh fill lighting looks better sometimes.	Long integer	-50,000
c3DFillY	See meaning for <b>c3DFillX</b> .	Long integer	0
c3DFillZ	See meaning for <b>c3DFillX</b> .	Long integer	10,000
c3DFillIntensity	Theoretical maximum is 1, but may be higher.	Fixed	38,000
fc3DParallel	<b>True</b> if the fill has parallel projection, <b>False</b> if it does not. If <b>fc3DParallel</b> is <b>True</b> , the <b>fc3DKeyHarsh</b> and <b>fc3DFillHarsh</b> properties determine the parallel projection used. A skew amount of 0 means the projection is orthographic.	Boolean	TRUE
fc3DKeyHarsh	<b>True</b> if key lighting is harsh, <b>False</b> if it is not.	Boolean	TRUE
fc3DFillHarsh	<b>True</b> if fill lighting harsh, <b>False</b> if it is not.	Boolean	FALSE
c3DCrMod	Modification for BW views.	Color	Undefined
c3DTolerance	3D tolerance.	Fixed	30,000

f3DOK	3D can be set.	Boolean	TRUE
fc3DConstrainRotation	If TRUE, then, the rotation is restricted to x-y rotation and the final rotation results from first rotating by c3DYRotation degrees about the y-axis and then by rotating c3DXRotation degrees about the z-axis. If FALSE, then the final rotation results from a single rotation of c3DRotationAngle about the axis specified by c3DRotationAxisX,Y,and Z.	Boolean	TRUE
<b>Perspective</b>			
perspectiveOffsetX	The values define a transformation matrix. Each value isFixed scaled by the perspectiveWeight parameter.		0
perspectiveOffsetY	See meaning for perspectiveOffsetX.	Fixed	0
perspectiveOriginX	Perspective x origin.	Fixed	32,768
perspectiveOriginY	Perspective y origin.	Fixed	32,768
perspectivePerspectiveX	See meaning for perspectiveOffsetX.	Fixed	0
perspectivePerspectiveY	See meaning for perspectiveOffsetX.	Fixed	0
perspectiveScaleXToX	See meaning for perspectiveOffsetX.	Fixed	65,536
perspectiveScaleXToY	See meaning for perspectiveOffsetX.	Fixed	0
perspectiveScaleYToX	See meaning for perspectiveOffsetX.	Fixed	0
perspectiveScaleYToY	See meaning for perspectiveOffsetX.	Transform type	65,536
perspectiveType	Where transform applies: 0 Absolute 1 Shape 2 Drawing	Fixed	1
perspectiveWeight	Scaling factor.	Boolean	256
fPerspective	On/off.		Not applicable

## Callout

spcot	Callout type:	Not applicable	3
	1 Right angle		
	2 One segment		
	3 Two segments		
	4 Three segments		
dxyCalloutGap	Distance from box to first point.	EMU	76,200
spcoa	Callout angle:	Not applicable	1
	1 Any angle		
	2 30 degrees		
	3 43 degrees		
	4 60 degrees		
	5 90 degrees		
spcod	Callout drop type:		3
	0 Top		
	1 Center		
	2 Bottom		
	3 Specified by dxyCalloutDropSpecified		
dxyCalloutDropSpecified	If <b>spcod</b> is 3, then this holds the actual drop distance.	EMU	114,300
dxyCalloutLengthSpecified	In the case where <b>fCalloutLengthSpecified</b> is <b>True</b> , this holds the actual distance.	EMU	0
fCallout	This is a callout.	Boolean	FALSE
fCalloutAccentBar	Callout has an accent bar.	Boolean	FALSE
fCalloutTextBorder	Callout has a text border.	Boolean	TRUE
fCalloutDropAuto	<b>True</b> if Auto attach is on. <b>False</b> if it is off. If this is <b>True</b> , then the converter should occasionally invert the drop distance.	Boolean	FALSE
fCalloutLengthSpecified	<b>True</b> if the callout length is specified; <b>False</b> if it is not. If <b>True</b> , use <b>dxyCalloutLengthSpecified</b> . If <b>False</b> , the <b>Best Fit</b> option is on.	Boolean	FALSE
fCalloutMinusX	The polyline of the callout is to the right	Boolean	FALSE
fCalloutMinusY	The polyline of the callout is down.	Boolean	FALSE
fCalloutTextBorder	Callout has a text border	Boolean	TRUE

## Connectors

cxc	Connection site type:	Connector style	1
	0 None		
	1 Segments		
	2 Custom		
	3 Rect		
cxstyle	Connector style:		3
	0 Straight		
	1 Bent		
	2 Curved		
	3 None		





Drawing Canvases and Diagrams

dgmt	Diagram type:	Diagram style	Not applicable
	0 Drawing Canvas		
	1 Organizational Chart		
	2 Radial Diagram		
	3 Cycle Diagram		
	4 Pyramid Diagram		
	5 Venn Diagram		
	6 Target Diagram		
dgmtStyle	Diagram style, which is dependent on the Diagram type:	Complex	Not applicable
	Organization Chart Styles		
	0 Default		
	1 Outline		
	2 Double Outline		
	3 Thick Outline		
	4 Primary Colors		
	5 Shaded		
	6 Fire		
	7 3-D Color		
	8 Gradient		
	9 Brackets		
	10 Braces		
	11 Bookend Fills		
	12 Stripes		
	13 Beveled		
	14 Beveled Gradient		
	15 Square Shadows		
	16 Wire Frame		
	Radial Diagram Styles		
	0 Default		
	1 Outline		
	2 Double Outline		
	3 Thick Outline		
	4 Primary Colors		
	5 Shaded		
	6 Fire		
	7 3-D Color		
	8 Gradient		
	9 Square Shadows		
	Cycle Diagram Styles		
	0 Default		

- 1 Outline
- 2 Double Outline
- 3 Thick Outline
- 4 Primary Colors
- 5 Shaded
- 6 Fire
- 7 3-D Color
- 8 Gradient
- 9 Square Shadows
- 10 Default (counterclockwise)
- 11 Outline (counterclockwise)
- 12 Double Outline (counterclockwise)
- 13 Thick Outline (counterclockwise)
- 14 Primary Colors (counterclockwise)
- 15 Shaded (counterclockwise)
- 16 Fire (counterclockwise)
- 17 3-D Color (counterclockwise)
- 18 Gradient (counterclockwise)
- 19 Square Shadows (counterclockwise)

#### Pyramid Diagram Styles

- 0 Default
- 1 Outline
- 2 Double Outline
- 3 Thick Outline
- 4 Primary Colors
- 5 Shaded
- 6 Fire
- 7 3-D Color
- 8 Gradient
- 9 Square Shadows

#### Venn Diagram Styles

- 0 Default
- 1 Outline
- 2 Double Outline
- 3 Thick Outline
- 4 Primary Colors
- 5 Shaded
- 6 Fire
- 7 3-D Color
- 8 Gradient
- 9 Square Shadows

	Target Diagram Styles			
	0	Default		
	1	Outline		
	2	Double Outline		
	3	Thick Outline		
	4	Primary Colors		
	5	Shaded		
	6	Fire		
	7	3-D Color		
	8	Gradient		
	9	Square Shadows		
pRelationTbl	Complex property specifies table of relationships.		Fixed	Not applicable
dgmScaleX	The scale factor for width of a diagram.		Fixed	65,536
dgmScaleY	The scale factor for height of a diagram.		Integer	65,536
dgmDefaultFontSize	Specifies the font size in points of text for new nodes in a diagram.		Complex	Not applicable
dgmConstrainBounds	Specifies the bounds that the diagram nodes are constrained to		Boolean	Not applicable
fDoFormat	Specifies if auto formatting of a diagram is turned on.		Layout Type	0
dgmLayout	This property specifies the node layout in a diagram, which is dependent on the Diagram type:			
	Organization Chart Node Layout			
	0	Standard		
	1	Both Hanging		
	2	Left Hanging		
	3	Right Hanging		
dgmNodeKind	This property specifies kind of node in a diagram and is exposed in the RTF format. The following Diagram node kinds are currently supported:			
	0	Node		
	1	Root		
	2	Assistant,		
	3	CoWorker,		
	4	Subordinate,		
	5	Auxiliary Node,		
	6	Default		

**Black and White Modes**

bWMode	Settings for modifications to be made when in different forms of black and white mode:	Black and white mode	1
	0	Color	
	1	Automatic	
	2	Grayscale	
	3	Light grayscale	
	4	Inverse gray	
	5	Gray outline	
	6	Black TextLine	
	7	High contrast	
	8	Black	
	9	White	
	10	Don't show	
	11	Number of black and white modes	
bWModeBW	See meaning for <b>bWMode</b> .	Black and White Mode	1
bWModePureBW	See meaning for <b>bWmode</b> .		1

The format of the value depends on the property name it is paired with. Many values are simple single numbers. Distances are expressed in EMU units. There are 12,700 EMU units in a point hence 914,400 in an inch and 360,000 cm<sup>-1</sup>. Fractional or fixed values are expressed using units that are 1/65536<sup>th</sup> of a whole. Angles are expressed as fractions of a degree. Colors are 24-bit color values. Booleans have two possible values: 1 for **True** and 0 for **False**.

Arrays are formatted as a sequence of numbers separated by semicolons. The first number tells the size of each element in the array in bytes. The number of bytes per element may be 2, 4, or 8. When the size of the element is 8, each element is represented as a group of two numbers. The second number tells the number of elements in the array. For example, the points of a square polygon are written as:

```
{sv 8;4;{0,0};{100,0};{100,100};{0,100}}
```

The **ShapeType** property can have the following possible values.

<b>Value</b>	<b>Meaning</b>
0	Freeform or non-autoshape
1	Rectangle
2	Round rectangle
3	Ellipse
4	Diamond
5	Isosceles triangle
6	Right triangle
7	Parallelogram
8	Trapezoid
9	Hexagon
10	Octagon
11	Plus Sign
12	Star
13	Arrow
14	Thick arrow
15	Home plate
16	Cube
17	Balloon
18	Seal
19	Arc
20	Line
21	Plaque
22	Can
23	Donut
24	Text simple
25	Text octagon
26	Text hexagon
27	Text curve
28	Text wave
29	Text ring
30	Text on curve
31	Text on ring
41	Callout 1
42	Callout 2
43	Callout 3
44	Accent callout 1
45	Accent callout 2
46	Accent callout 3
47	Border callout 1
48	Border callout 2
49	Border callout 3
50	Accent border callout 1
51	Accent border callout 2

<b>Value</b>	<b>Meaning</b>
52	Accent border callout 3
53	Ribbon
54	Ribbon2
55	Chevron
56	Pentagon
57	No smoking
58	Seal8
59	Seal16
60	Seal32
61	Wedge rectangle callout
62	Wedge RRect callout
63	Wedge ellipse callout
64	Wave
65	Folded corner
66	Left arrow
67	Down arrow
68	Up arrow
69	Left right arrow
70	Up down arrow
71	IrregularSeal1
72	IrregularSeal2
73	Lightning bolt
74	Heart
75	Picture frame
76	Quad arrow
77	Left arrow callout
78	Right arrow callout
79	Up arrow callout
80	Down arrow callout
81	Left right arrow callout
82	Up down arrow callout
83	Quad arrow callout
84	Bevel
85	Left bracket
86	Right bracket
87	Left brace
88	Right brace
89	Left up arrow
90	Bent up arrow
91	Bent arrow
92	Seal24
93	Striped right arrow
94	Notched right arrow

<b>Value</b>	<b>Meaning</b>
95	Block arc
96	Smiley face
97	Vertical scroll
98	Horizontal scroll
99	Circular arrow
100	Notched circular arrow
101	U-turn arrow
102	Curved right arrow
103	Curved left arrow
104	Curved up arrow
105	Curved down arrow
106	Cloud callout
107	Ellipse ribbon
108	Ellipse ribbon 2
109	Flow chart process
110	Flow chart decision
111	Flow chart input output
112	Flow chart predefined process
113	Flow chart internal storage
114	Flow chart document
115	Flow chart multidocument
116	Flow chart terminator
117	Flow chart preparation
118	Flow chart manual input
119	Flow chart manual operation
120	Flow chart connector
121	Flow chart punched card
122	Flow chart punched tape
123	Flow chart summing junction
124	Flow chart or
125	Flow chart collate
126	Flow chart sort
127	Flow chart extract
128	Flow chart merge
129	Flow chart offline storage
130	Flow chart online storage
131	Flow chart magnetic tape
132	Flow chart magnetic disk
133	Flow chart magnetic drum
134	Flow chart display
135	Flow chart delay
136	Text plain text
137	Text stop



<b>Value</b>	<b>Meaning</b>
138	Text triangle
139	Text triangle inverted
140	Text chevron
141	Text chevron inverted
142	Text ring inside
143	Text ring outside
144	Text arch up curve
145	Text arch down curve
146	Text circle curve
147	Text button curve
148	Text arch up pour
149	Text arch down pour
150	Text circle pour
151	Text button pour
152	Text curve up
153	Text curve down
154	Text cascade up
155	Text cascade down
156	Text wave1
157	Text wave2
158	Text wave3
159	Text wave4
160	Text inflate
161	Text deflate
162	Text inflate bottom
163	Text deflate bottom
164	Text inflate top
165	Text deflate top
166	Text deflate inflate
167	Text deflate inflate deflate
168	Text fade right
169	Text fade left
170	Text fade up
171	Text fade down
172	Text slant up
173	Text slant down
174	Text can up
175	Text can down
176	Flow chart alternate process
177	Flow chart off-page connector
178	Callout 90
179	Accent callout 90
180	Border callout 90

Value	Meaning
181	Accent border callout 90
182	Left right up arrow
183	Sun
184	Moon
185	Bracket pair
186	Brace pair
187	Seal4
188	Double wave
201	Host control
202	Text box

The following keywords are related to defining a hyperlink hanging off of a shape (that is, all of them are inside of a `{\sp {\sn ... } {\sp ...}}`). These specifically can occur in the **\sp** to define a property that is a hyperlink. They are used in the following way:

```
{ \hl { \hlloc RTF-string } { \hlsrc RTF-string } { \hlfr RTF-string } }
```

The three groups can be in any order and provide the three strings needed to fully describe a hyperlink. The control words are described in the following table.

Control word	Meaning
\hlloc	Location string for hyperlink.
\hlsrc	Source string for hyperlink.
\hlfr	Friendly name for hyperlink.

For more information on drawing, please refer to the Microsoft Draw Binary Format Specification, which can be requested from [officeeff@microsoft.com](mailto:officeeff@microsoft.com).

## Footnotes

The **\footnote** control word introduces a footnote. Footnotes are destinations in RTF. A footnote is anchored to the character that immediately precedes the footnote destination (that is, the footnote moves with the character to which it is anchored). If automatic footnote numbering is defined, the destination can be preceded by a footnote reference character, identified by the control word **\chftn**. Microsoft products do not support footnotes within headers, footers, or comments (annotations). Placing a footnote within headers, footers, or comments will often result in a corrupted document.

Footnotes have the following syntax:

```
<foot>          '{' \footnote <para>+ '}'
```

Here is an example of a destination containing footnotes:

```
\ftnbj\ftnrestart \sectd \linemod0\linex0\endnhere \pard\plain
\ril170 \fs20 {\pu6 Mead's landmark study has been amply annotated.\chftn
{\footnote \pard\plain \s246 \fs20 {\up6\chftn }See Sahllins, Bateson, and
Geertz for a complete bibliography.}
```

```
It was her work in America during the Second World War, however, that forms
the basis for the paper. As others have noted, \chftn
{\footnote \pard\plain \s246 \fs20 {\up6\chftn}
```

A complete bibliography will be found at the end of this chapter.}

this period was a turning point for Margaret Mead.}

\par

To indicate endnotes, the following combination is emitted: **\footnote\ftnalt**. Existing readers will ignore the **\ftnalt** control word and treat everything as a footnote.

For other control words relating to footnotes, see the sections titled [Document Formatting Properties](#), [Section Formatting Properties](#), and [Special Characters](#) in this specification

## Comments (Annotations)

RTF comments (annotations) have two parts; the author ID (introduced by the control word **\atnid**) and the annotation text (introduced by the control word **\annotation**); there is no group enclosing both parts. Microsoft products do not support comments within headers, footers, or footnotes. Placing an annotation within headers, footers, or footnotes will often result in a corrupted document. Each part of the annotation is an RTF destination. Comments are anchored to the character that immediately precedes the annotation.

If an annotation is associated with an annotation bookmark, the following two destination control words precede and follow the bookmark. The alphanumeric string **N**, such as a long integer, represents the bookmark name.

<atrftstart>	'{\* \atrftstart N '}'
<atrftend>	'{\* \atrftend N '}'

Comments have the following syntax:

<annot>	<annotid> <atnauthor> <atntime>? <b>\chatn</b> <atnicn>? <annotdef>
<annotid>	'{\* \atnid #PCDATA '}'
<atnauthor>	'{\* \atnauthor #PCDATA '}'
<annotdef>	'{\* \annotation <atndate>? <atnref> <atnparent> <para>+ '}'
<atnref>	'{\* \atnref N '}'
<atntime>	'{\* \atntime <time> '}'
<atndate>	'{\* \atndate <date> '}'
<atnparent>	"{\* \atnparent <annotid of parent> '}'
<atnicn>	'{\* \atnicn <pict> '}'

The following is an example of annotation text:

```
{\insrsid8729657 An example of a paradigm might be Darwinian biology.}
{\cs15\v\fs16\insrsid8729657 {\*\atnid JD}{*\atnauthor John Doe}\chatn
{\*\annotation{\*\atndate 1180187342}\pard\plain \s16\ql
\li0\ri0\widctlpar\aspalpha\aspnum\faauto\adjustright\rin0\lin0\itap0
\fs20\lang1033\langfe1033\cgrid\langnp1033\langfenp1033 {\cs15\fs16\insrsid8729657 \chatn }
{\insrsid9244585 How about some examples that deal with social science? That is what this paper
is about.}}}
```

Comments may have optional time stamps (contained in the **\atntime** destination), date stamps (contained in the **\atndate** destination), or icons (contained in the **\atnicn** destination).

## Fields

The **\field** control word introduces a field destination, which contains the text of fields. Fields have the following syntax:



## Form Fields

Control word	Meaning
\formfield	Group destination keyword indicating start of form field data.
\fftype $N$	Form field type: 0 Text 1 Check box 2 List
\ffownhelp $N$	1 if there is associated Help text (defined under \ffhelptext), 0 otherwise.
\ffownstat $N$	1 if there is associated status line text (defined under \ffstattext), 0 otherwise.
\ffprot $N$	1 if this field is protected, 0 otherwise.
\ffsize $N$	Type of size selected for check box field: 0 Auto 1 Exact
\fftypetxt $N$	Type of text field: 0 Regular text 1 Number 2 Date 3 Current date 4 Current time 5 Calculation
\ffrecalc $N$	1 if the field should be calculated on exit, 0 otherwise.
\ffhaslistbox $N$	1 if this field has list box attached to it, 0 otherwise.
\ffmaxlen	Number of characters for text field.
\ffhps $N$	Check box size (half-point sizes).
\ffname	Form field name (string). This is a destination control word.
\ffdeftext	Default text for text field (string). This is a destination control word.
\ffdefres	Default entry for list field (for example 0 = first list item, 1 = second list item).
\ffformat	Format for text field (string). This is a destination control word.
\ffhelptext	Help text (string). This is a destination control word.
\ffstattext	Status line text (string). This is a destination control word.
\ffentrymcr	Macro to execute upon entry into this form field (string). This is a destination control word.
\ffexitmcr	Macro to execute upon exit from this form field (string). This is a destination control word.
\ffl	List of text for list field. This is a destination control word.
\ffres $N$	Result field for a form field. Values from 0 to $N-1$ , where $N$ is the number of \ffl entries.

## Index Entries

The \xe control word introduces an index entry. Index entries in RTF are destinations. An index entry has the following syntax:

<idx>	'{ \xe (\xef? & \bxe? & \ixe?) <entry> (<txe>   <rxex>)? }'
<entry>	(<char>+ <yxe>?)   ('{ <char>+ <yxe>? }')
<yxe>	\yxe <char>+ #PCDATA
<txe>	'{ \txe <char>+ #PCDATA }'
<rxex>	'{ \rxex #PCDATA }'

If the text of the index entry is not formatted as hidden text with the `\v` control word, then the text is put into the document as well as into the index. Similarly, the text of the `\txe` subdestination, described later in this section, becomes part of the document if it is not formatted as hidden text. For more information on the `\v` control word, see [Font/Character Formatting Properties](#) in this specification.

The following control words may also be used.

Control word	Meaning
<code>\xefN</code>	Allows multiple indexes within the same document. <b>N</b> is an integer that corresponds to the ASCII value of a letter between A and Z.
<code>\bxe</code>	Formats the page number or cross-reference in bold.
<code>\ixe</code>	Formats the page number or cross-reference in italic.
<code>\t<sub>xe</sub> Text</code>	Text argument to be used instead of a page number. This is a destination control word.
<code>\rxe BookmarkName</code>	Text argument is a bookmark for the range of page numbers. This is a destination control word.
<code>\yxe</code>	Pronunciation (or heading) for index entry, used in phonetic sorting.
<code>\*\pxe</code>	"Yomi" (pronunciation) for index entry.

### Table of Contents Entries

The `\tc` control word introduces a table of contents entry, which can be used to build the actual table of contents. The `\tcn` control word marks a table of contents entry that will not have a page number associated with it; this is used in place of `\tc` for such entries. Table of contents entries are destinations, and they have the following syntax:

```
<toc>          '{' \tc | \tcn (\tcf? & \tcl?) <char>+ '}'
```

As with index entries, text that is not formatted as hidden with the `\v` character-formatting control word is put into the document. The following control words can also be used in this destination.

Control word	Meaning
<code>\tcfN</code>	Type of table being compiled. <b>N</b> is mapped by existing Microsoft software to a letter between A and Z (the default is 67, which maps to C, used for tables of contents).
<code>\tclN</code>	Level number (the default is 1).

### Bidirectional Language Support

RTF supports bidirectional writing orders for languages such as Arabic. The controls are described in the following table (as well as in the appropriate sections throughout this specification). Also refer to the associated character properties defined in [Associated Character Properties](#) in this specification.

All the control words relating to bidirectional language support are repeated here for convenience.

Control word	Meaning
\rtlch	The character data following this control word will be treated as a right-to-left run.
\ltrch	The character data following this control word will be treated as a left-to-right run (the default).
\linN	Left indent for left-to-right paragraphs; right indent for right-to-left paragraphs (the default is 0).
\rinN	Right indent for left-to-right paragraphs; left indent for right-to-left paragraphs (the default is 0).
\pgnbidia	Page-number format is Abjad Jawaz if language is Arabic and Biblical Standard if language is Hebrew.
\pgnbidib	Page number format is Alif Ba Tah if language is Arabic and Non-standard Decimal if language is Hebrew.
\pnbidia	Abjad Jawaz if language is Arabic and Biblical Standard if language is Hebrew.
\pnbidib	Alif Ba Tah if language is Arabic and Non-standard Decimal if language is Hebrew.
\rtlmrk	The following characters should be displayed from right to left.
\ltrmrk	The following characters should be displayed from left to right.
\rtlpar	Text in this paragraph will be displayed with right-to-left precedence.
\ltrpar	Text in this paragraph will be displayed with left-to-right precedence (the default).
\rtlrow	Cells in this table row will have right-to-left precedence.
\ltrrow	Cells in this table row will have left-to-right precedence (the default).
\rtlsect	This section will thread columns from right to left.
\ltrsect	This section will thread columns from left to right (the default).
\rtldoc	Text in this document will be displayed from right to left unless overridden by a more specific control.
\ltrdoc	Text in this document will be displayed from left to right unless overridden by a more specific control (the default).
<b>\levelnfcN</b>	Same as <b>\levelnfc</b> . Takes priority over it if both are present.
\leveljcnN	0 Left justified for left-to-right paragraphs and right justified for right-to-left paragraphs
	1 Center justified
	2 Right justified for left-to-right paragraphs and left justified for right-to-left paragraphs
	Takes priority over <b>\leveljc</b> if both are present.
\rtlgttr	Gutter is positioned on the right.
\taprtl	Indicates that the table direction is right-to-left.
\zwj	Zero-width joiner. This is used for ligating characters.
\zwnj	Zero-width nonjoiner. This is used for unligating characters.

## East ASIAN Support

Word 2000 and subsequent releases provide full support for all East Asian features introduced in all previous Asian versions of Word and they have the ability to read and write RTF keywords related to such features. This section provides details on the handling of East Asian characters. For more information on handling East Asian features, see the appropriate subsection in the [Contents of an RTF File](#) section in this document.

## Escaped Expressions

An escaped expression (for example, \hh, \, or \{) is usable in all RTF control words.

Writer

In general RTF should be written out with all characters above 0x80 in the escaped form, \hh. The following table shows values for character codes.

Character code	Write out as
0x00 <= ch < 0x20	Escaped (\hh)
0x20 <= ch < 0x80	Raw (non-escaped) character
0x80 <= ch <= 0xFF	Escaped (\hh)
0x5C, 0x7B, 0x7D (special RTF characters \, {, or })	Escaped (\hh)

## Reader

When the RTF reader encounters raw characters in the leading-byte range of the double-byte character, it regards the next character as the trailing byte of the double-byte character and combines the two characters into one double-byte character. The following table shows possible byte combinations.

Leading byte	Trailing byte	Validity
Escaped	Raw (0x20 <= ch <= 0x7f)	Valid (standard format for double-byte character)
Escaped	Escaped (other)	Valid (standard format for double-byte character)
Raw	Raw	Valid (RTF-J format for double-byte character)
Raw	Escaped	Invalid

**Note** characters that are special RTF symbols (\, {, or }) should always be escaped, preferably using the \hh syntax.

## Character Set

Word J specifies the character set in the font table using **\fcharset**. Word J interprets **\cpg437** as **\fcharset0** and **\cpg932** as **\fcharset128** if it encounters these control words when reading RTF. If both **\fcharset** and **\cpg** appear in the font table, **\cpg** is ignored.

## Character Mapping

Word maps single-byte characters according to character set information (for example, Macintosh to ANSI) and leaves double-byte characters unmapped.

## Font Family

RTF-J control words	Definition and the interpretation in Word
\jis	RTF-J uses <b>\jis</b> as a control word for character set. Word J interprets this as <b>\ansi</b> , which is the default character set used if the character set is not defined.
\fjminchou and \fjgothic	RTF-J uses <b>\fjminchou</b> and <b>\fjgothic</b> to specify font family. Word J interprets these as <b>\fnil</b> , which is the default font family.

### ShiftJIS Font Without \cpg or \fcharset

If **\cpg** or **\fcharset** control words are not present, Word J uses the text metrics of the font before determining the character set of these fonts. If the font is unknown, Word J assumes it is SHIFTJIS\_CHARSET.



### Composite Fonts (Associated Fonts for International Runs)

Word J defines control words to specify composite fonts as associated character properties. These control words follow the rule of associated character properties and understand font designation (**\af**). All other **<aprops>** are ignored in Word J. Composite fonts have the following syntax:

<b>&lt;atext&gt;</b>	<b>&lt;losbrun&gt;   &lt;hisbrun&gt;   &lt;dbrun&gt;</b>
<b>&lt;losbrun&gt;</b>	<b>\hich \af &amp; &lt;aprops&gt; \dbch \af &amp; &lt;aprops&gt; \loch &lt;ptext&gt;</b>
<b>&lt;hisbrun&gt;</b>	<b>\loch \af &amp; &lt;aprops&gt; \dbch \af &amp; &lt;aprops&gt; \hich &lt;ptext&gt;</b>
<b>&lt;dbrun&gt;</b>	<b>\loch \af &amp; &lt;aprops&gt; \hich \af &amp; &lt;aprops&gt; \dbch &lt;ptext&gt;</b>

These control words are described in the following table.

Control word	Meaning
<b>\loch</b>	Specifies a run of the characters in the low-ANSI (0x00–0x7F) area.
<b>\hich</b>	For the characters in the high-ANSI (0x80--0xFF) area.
<b>\dbch</b>	Specifies a run of the double-byte characters.

Word J writes out associated character properties in the styles. In the style sheet, the **<dbrun>** definition should be used for compatibility with applications that have transparent readers.

```
{\stylesheet{\loch\af5\hich\af5\dbch\f27\fs20\next0 Normal;}}
```

If the composite font definition matches the style, only the control word (**\loch**, **\hich**, or **\dbch**) is used to distinguish the type of run, along with the font information for transparent readers.

```
{\fonttbl{\f5\fswiss\fcharset0\frq2 Arial;}{\f27\froman\fcharset128\frq1 Mincho;}}
```

```
{\stylesheet{\loch\af5\hich\af5\dbch\f27\fs20\next0 Normal;}}
```

```
\pard\plain
```

```
{\dbch\f27\fs20 \'82\'b1\'82\'ea\'82\'cd}
```

```
{\loch\f5 Test }
```

```
{\dbch\f27\'82\'c5\'82\'b7\'81B}
```

```
\par}
```

If one or all of **\loch**, **\hich**, and **\dbch** are missing from the style sheet definition (or the character set does not match), Word J applies the following fonts to each character run in the style using the bulleted rules in the next paragraph.

Control word	Font Word J applies
<b>\loch</b>	Same font as <b>\f</b> .
<b>\hich</b>	Any font whose character set is ANSI_CHARSET.
<b>\dbch</b>	Any font whose character set is SHIFTJIS_CHARSET.

If the composite font control words are missing from the character run, Word J will interpret all characters below 0x80 as a **\loch** run. Characters above or equal to 0x80 are determined using the following rules:

- If the character is in the leading-byte range and the next character is in the trailing-byte range of a double-byte character, it is treated as a **\dbch** run (one double-byte character). For example,

**\'99\'47-**喜

- If the character is in the leading-byte range of a double-byte character but the next character is not in the trailing-byte range, it is treated as a **\hich** run (two high-ANSI or low-ANSI characters). For example,

\'99\'FF →

- If the character is in the leading-byte range of a double-byte character and is the last character in the run, it is treated as a **\hich** run (one high-ANSI character). For example,

\'99\par →

- If the character is not in the leading-byte range of a double-byte character, it is treated as a **\hich** run (one high-ANSI character). For example,

\'FF →

**New Far East Control Words Created by Word 6J**

## Control word      Meaning

Associated Character Properties	
\loch	The text consists of single-byte low-ANSI (0x00–0x7F) characters.
\high	The text consists of single-byte high-ANSI (0x80–0xFF) characters.
\dbch	The text consists of double-byte characters.
Borders	
\brdrdash	Dashed border.
\brdrdashd	Dash-dotted border.
\brdrdashdd	Dash-dot-dotted border.
Character Properties	
\uldash	Dashed underline.
\uldashd	Dash-dotted underline.
\uldashdd	Dash-dot-dotted underline.
\ulhair	Hairline underline.
\ulth	Thick underline.
\ulwave	Wave underline.
\accnone	No accent characters (over dot / over comma).
\accdot	Over dot accent.
\acccomma	Over comma accent.
\charscalex	Character width scaling.
\striked1	Double strikethrough. <b>\striked0</b> turns it off.
Document Formatting Properties	
\horzdoc	Horizontal rendering.
\vertdoc	Vertical rendering.
\*\fchars	List of following Kinsoku characters.
\*\lchars	List of leading Kinsoku characters.
\jcompress	Compressing justification (default).
\jexpand	Expanding justification.
\gutterprl	Parallel gutter.
\dgsnap	Snap to drawing grid.
\dghspaceN	Drawing grid horizontal spacing in twips (the default is 120).
\dgvspaceN	Drawing grid vertical spacing in twips (the default is 120).
\dghoriginN	Drawing grid horizontal origin in twips (the default is 1,701).
\dgvoriginN	Drawing grid vertical origin in twips (the default is 1,984).
\dghshowN	Show <b>N</b> th horizontal drawing gridline (the default is 3).
\dgvshowN	Show <b>N</b> th vertical drawing gridline (the default is 0).
\twoonone	Print two logical pages on one physical page.
\Inongrid	Define line based on the grid.
Bullets and Numbering	
\pndec	Double-byte decimal numbering (\*arabic\dbchar).
\pndbnum	Kanji numbering without the digit character (\*dbnum1).
\pnaiu	46 phonetic katakana characters in "aiueo" order (\*aiueo).
\pnaid	46 phonetic double-byte katakana characters (\*aiueo\dbchar).

Control word	Meaning
\pniroha	46 phonetic katakana characters in "iroha" order (\*iroha).
\pnirohad	46 phonetic double-byte katakana characters (\*iroha\*dbchar).
\pncnum	20 numbered list in circle (\*circenum).
\pnuldash	Dashed underline.
\pnuldashd	Dash-dotted underline.
\pnuldashdd	Dash-dot-dotted underline.
\pnulhair	Hairline underline.
\pnulth	Thick underline.
\pnulwave	Wave underline.

### Drawing Objects

\dptxlrtb	Text box flows from left to right and top to bottom (default).
\dptxtbrl	Text box flows from right to left and top to bottom.
\dptxbtlr	Text box flows from left to right and bottom to top.
\dptxlrtbv	Text box flows from left to right and top to bottom, vertically.
\dptxtbrlv	Text box flows from top to bottom and right to left, vertically.

### Frame Properties

\frmtxlrtb	Frame box flows from left to right and top to bottom (default).
\frmtxtbrl	Frame box flows right to left and top to bottom.
\frmtxbtlr	Frame box flows left to right and bottom to top.
\frmtxlrtbv	Frame box flows left to right and top to bottom, vertical.
\frmtxtbrlv	Frame box flows top to bottom and right to left, vertical.

### Index Entries

\*\pxe	"Yomi" (pronunciation) for index entry.
--------	---

### Paragraph Properties

\nocwrap	No character wrapping.
\nowwrap	No word wrapping.
\qd	Distributed.
\nooverflow	No overflow period and comma.
\aspalpha	Auto spacing between DBC and English.
\aspnum	Auto spacing between DBC and numbers.
\fahang	Font alignment – Hanging.
\facenter	Font alignment – Center.
\faroman	Font alignment – Roman (default).
\favar	Font alignment – Upholding variable.
\fafixed	Font alignment – Upholding fixed.

### Section Formatting Properties

\horzsect	Horizontal rendering.
\vertsect	Vertical rendering.
\pgndecd	Double-byte decimal numbering.
\pgndbnum	Kanji numbering without the digit character.
\pgndbnumd	Kanji numbering with the digit character.

### Special Characters

Control word	Meaning
<code>\zwbo</code>	Zero-width break opportunity. Used to insert break opportunity between two characters.
<code>\zwnbo</code>	Zero-width nonbreak opportunity. Used to remove break opportunity between two characters.
<code>\qmspace</code>	One-quarter em space.
Table Formatting	
<code>\cldglu</code>	Diagonal line (top left to bottom right). Followed by <code>&lt;brdr&gt;</code> , which defines the properties of the diagonal border ( <b><code>\cldglu</code></b> <code>&lt;brdr&gt;</code> ).
<code>\cldgll</code>	Diagonal line (top right to bottom left). Followed by <code>&lt;brdr&gt;</code> , which defines the properties of the diagonal border ( <b><code>\cldgll</code></b> <code>&lt;brdr&gt;</code> ).
<code>\cltxlrtd</code>	Text in a cell flows from left to right and top to bottom (default).
<code>\cltxtrtd</code>	Text in a cell flows right to left and top to bottom.
<code>\cltxbtld</code>	Text in a cell flows left to right and bottom to top.
<code>\cltxlrbv</code>	Text in a cell flows left to right and top to bottom, vertical.
<code>\clxtbrlv</code>	Text in a cell flows top to bottom and right to left, vertical.
<code>\clvmgf</code>	The first cell in a range of table cells to be vertically merged.
<code>\clvmrg</code>	Contents of the table cell are vertically merged with those of the preceding cell.
<code>\clvertat</code>	Cell top align.
<code>\clvertalc</code>	Cell vertically center align.
<code>\clvertalb</code>	Cell bottom align.
<b>Tabs</b>	
<code>\tlmdot</code>	Leader middle dots.

## **New Far East Control Words Created by Asian Versions of Word 97**

Control word	Meaning
<b>Character Formatting Properties</b>	
\cgrid <i>N</i>	Character grid.
\g	Destination related to character grids.
\gcw	Grid column width.
\gridtbl	Destination keyword related to character grids.
\nosectexpand	Disable character space basement.
<b>Paragraph Formatting Properties</b>	
\adjustright	Automatically adjust right indent when document grid is defined.
\nosnaplinegrid	Disable snap line to grid.
\fauto	Font alignment the default setting for this is "Auto."
<b>Borders</b>	
\brdrframe	Border resembles a frame.
<b>Bullets and Numbers</b>	
\pnaieuo	46 phonetic katakana characters in "aiueo" order (*aiueo).
\pnaieod	46 phonetic double-byte katakana characters (*aiueo*dbchar).
\pndbnumd	Kanji numbering with the digit character (*dbnum2).
\pndbnumt	Kanji numbering 3 (*dbnum3).
\pndbnuml	Kanji numbering 3 (*dbnum3).
\pndbnumk	Kanji numbering 4 (*dbnum4).
\pnganada	Korean numbering 2 (*ganada).
\pngbnum	Chinese numbering 1 (*gb1).
\pngbnumd	Chinese numbering 2 (*gb2).
\pngbnuml	Chinese numbering 3 (*gb3).
\pngbnumk	Chinese numbering 4 (*gb4).
\pnzodiac	Chinese Zodiac numbering 1 (*zodiac1).
\pnzodiacd	Chinese Zodiac numbering 2 (*zodiac2).
\pnzodiacl	Chinese Zodiac numbering 3 (*zodiac3).
\pnganada	Korean numbering 1 (*ganada).
\pnchosung	Korean numbering 2 (*chosung).
<b>Endnotes and Footnotes</b>	
\ftnnchosung	Footnote Korean numbering 1 (*chosung).
\ftnncnum	Footnote Circle numbering (*circlenum).
\ftnndbnum	Footnote kanji numbering without the digit character (*dbnum1).
\ftnndbnumd	Footnote kanji numbering with the digit character (*dbnum2).
\ftnndbnumt	Footnote kanji numbering 3 (*dbnum3).
\ftnndbnumk	Footnote kanji numbering 4 (*dbnum4).
\ftnndbar	Footnote double-byte numbering (*dbchar).
\ftnnganada	Footnote Korean numbering 2 (*ganada).
\ftnngbnum	Footnote Chinese numbering 1 (*gb1).
\ftnngbnumd	Footnote Chinese numbering 2 (*gb2).
\ftnngbnuml	Footnote Chinese numbering 3 (*gb3).
\ftnngbnumk	Footnote Chinese numbering 4 (*gb4).



Control word	Meaning
\ftnnzodiac	Footnote numbering—Chinese Zodiac numbering 1 (* zodiac1) 甲、乙、丙… <del>甲、乙、丙</del>
\ftnnzodiacd	Footnote numbering—Chinese Zodiac numbering 2 (* zodiac2) 子、丑、寅…
\ftnnzodiacl	Footnote numbering—Chinese Zodiac numbering 3 (* zodiac3).
\aftnnchosung	Endnote Korean numbering 1 (*chosung).
\aftnncnum	Endnote Circle numbering (*circlenum).
\aftnndbnum	Endnote kanji numbering without the digit character (*dbnum1).
\aftnndbnumd	Endnote kanji numbering with the digit character (*dbnum2).
\aftnndbnumt	Endnote kanji numbering 3 (*dbnum3).
\aftnndbnumk	Endnote kanji numbering 4 (*dbnum4).
\aftnndbar	Endnote double-byte numbering (*dbchar).
\aftnnganada	Endnote Korean numbering 2 (*ganada).
\aftnngbnum	Endnote Chinese numbering 1 (*gb1).
\aftnngbnumd	Endnote Chinese numbering 2 (*gb2).
\aftnngbnuml	Endnote Chinese numbering 3 (*gb3).
\aftnngbnumk	Endnote Chinese numbering 4 (*gb4).
\aftnnzodiac	Endnote numbering—Chinese Zodiac numbering 1 (* zodiac1) 甲、乙、丙…
\aftnnzodiacd	Endnote numbering—Chinese Zodiac numbering 2 (* zodiac2) 子、丑、寅…
\aftnnzodiacl	Endnote numbering—Chinese Zodiac numbering 3 (* zodiac3).

### Section Formatting Properties

\pgnchosung	Korean numbering 1 (* chosung).
\pgncnum	Circle numbering (*circlenum).
\pgndbnumt	Kanji numbering 3 (*dbnum3).
\pgndbnumk	Kanji numbering 4 (*dbnum4).
\pgnganada	Korean numbering 2 (*ganada).
\pgngbnum	Chinese numbering 1 (*gb1).
\pgngbnumd	Chinese numbering 2 (*gb2).
\pgngbnuml	Chinese numbering 3 (*gb3).
\pgngbnumk	Chinese numbering 4 (*gb4).
\pgnzodiac	Chinese Zodiac numbering 1 (*zodiac1).
\pgnzodiacd	Chinese Zodiac numbering 2 (*zodiac2).
\pgnzodiacl	Chinese Zodiac numbering 3 (*zodiac3).
\sectexpandN	Character space basement (character pitch minus font size) <b>N</b> in device independent units (a device independent unit is 1/294912 <sup>th</sup> of an inch).
\sectlinegridN	Line grid, where <b>N</b> is the line pitch in 20ths of a point.
\sectdefaultcl	Default state of section. Indicates \sectspecifycl and \sectspecifyl are not emitted.
\sectspecifycl	Specify number of characters per line only.
\sectspecifyl	Specify both number of characters per line and number of lines per page.

### Document Formatting Properties

\dgmargin	Grid to follow margins.
-----------	-------------------------

### Index Entries

\yxe	Pronunciation (or heading) for index entry, used in phonetic sorting.
------	---

## New Far East Control Words Created by Word 2000

### Document Formatting Properties

<code>\jsku</code>	Indicates that the strict Kinsoku set must be used for Japanese; <code>\jsku</code> should not be present if <code>\ksulangN</code> is present <i>and</i> the language <i>N</i> is Japanese.
<code>\ksulangN</code>	Indicates what language <i>N</i> the customized Kinsoku characters defined in the <code>\fchars</code> and <code>\lchars</code> destinations belong to.

### Section Formatting Properties

<code>\sectspecifygenN</code>	Indicates that text should snap to the character grid. Note that the <i>N</i> is part of the keyword.
-------------------------------	---

### Paragraph Formatting Properties

<code>\cufiN</code>	First-line indent in hundredths of a character unit; overrides <code>\fiN</code> , although they should both be emitted with equivalent values.
<code>\culiN</code>	Left indent (space before) in character units. Behaves like <code>\linN</code> and overrides <code>\liN</code> and <code>\linN</code> , although they should all be emitted with equivalent values.
<code>\curiN</code>	Right indent (space after) in character units. Behaves like <code>\rinN</code> and overrides <code>\riN</code> and <code>\rinN</code> , although they should all be emitted with equivalent values.
<code>\lisbN</code>	Space before in hundredths of a character unit. Overrides <code>\sbN</code> although they should both be emitted with equivalent values.
<code>\lisaN</code>	Space after in hundredths of a character unit. Overrides <code>\saN</code> although they should both be emitted with equivalent values.

### Character Formatting Properties

<code>\horzvertN</code>	Text in the group flows in a direction opposite to that of the main document (Horizontal in vertical and vertical in horizontal): <table><tr><td>0</td><td>Switched text is uncompressed.</td></tr><tr><td>1</td><td>Switched text is compressed to current line height.</td></tr></table>	0	Switched text is uncompressed.	1	Switched text is compressed to current line height.						
0	Switched text is uncompressed.										
1	Switched text is compressed to current line height.										
<code>\twoinoneN</code>	Text in the group is displayed as two half-height lines within a line: <table><tr><td>0</td><td>Text is not enclosed.</td></tr><tr><td>1</td><td>Text is enclosed in parentheses.</td></tr><tr><td>2</td><td>Text is enclosed in square brackets ([ ]).</td></tr><tr><td>3</td><td>Text is enclosed in angled brackets (&lt; &gt;).</td></tr><tr><td>4</td><td>Text is enclosed in braces ({ }).</td></tr></table>	0	Text is not enclosed.	1	Text is enclosed in parentheses.	2	Text is enclosed in square brackets ([ ]).	3	Text is enclosed in angled brackets (< >).	4	Text is enclosed in braces ({ }).
0	Text is not enclosed.										
1	Text is enclosed in parentheses.										
2	Text is enclosed in square brackets ([ ]).										
3	Text is enclosed in angled brackets (< >).										
4	Text is enclosed in braces ({ }).										
<code>\fittextN</code>	Fit the text in the current group in <i>N</i> twips. When <i>N</i> is set to -1 ( <code>\fittext-1</code> ) it indicates a continuation of the previous <code>\fittextN</code> run. In other words <code>{\fittext1000 Fit this}</code> <code>{\fittext-1 text}</code> fits the string "Fit this text" in 1,000 twips.										

## Appendix A: Sample RTF Reader Application

A sample RTF reader program RTFREADR.EXE is available as part of the Software Development Kit (SDK) for 16-Bit and 32-Bit External Text File Converters, Application Note GC1039. The sample RTF reader will help you create an RTF reader for your own application when used in conjunction with the Microsoft Rich Text Format Specification and the information that follows.

**Note** The sample RTF reader is not a for-sale product, and Microsoft does not provide technical or any other type of support for the sample RTF reader code or the RTF specification.

For more information about how to download files from the Microsoft Download Center, please visit the Download Center at the following Web address:

<http://www.microsoft.com/downloads/search.asp>

Search for,RTFREADR.EXE.

## How to Write an RTF Reader

There are three basic things that an RTF reader must do:

- Separate text from RTF controls.
- Parse an RTF control.
- Dispatch an RTF control.

Separating text from RTF controls is relatively simple, because all RTF controls begin with a backslash. Therefore, any incoming character that is not a backslash is text and will be handled as text.

Parsing an RTF control is also relatively simple. An RTF control is either (a) a sequence of alphabetic characters followed by an optional numeric parameter, or (b) a single non-alphanumeric character.

Dispatching an RTF control, on the other hand, is relatively complicated. A recursive-descent parser tends to be overly strict because RTF is intentionally vague about the order of various properties relative to one another. However, whatever method you use to dispatch an RTF control, your RTF reader should do the following:

- Ignore control words you don't understand or don't wish to implement

Many RTF readers crash when they come across an unknown RTF control. Because Microsoft is continually adding new RTF controls, this limits an RTF reader to working with the RTF from one particular product (usually some version of Word for Windows).
- Always understand \\*

One of the most important things an RTF reader can do is to understand the \\* control. This control introduces a destination that is not part of the document. It tells the RTF reader that if the reader does not understand the next control word, then it should skip the entire enclosing group.
- Remember that binary data can occur when you're skipping RTF

A simple way to skip a group in RTF is to keep a running count of the opening braces the RTF reader has encountered in the RTF stream. When the RTF reader sees an opening brace, it increments the count. When the reader sees a closing brace, it decrements the count. When the count becomes negative, the end of the group was found. Unfortunately, this doesn't work when the RTF file contains a **\bin** control; the reader must explicitly check each control word found to see if it is a **\bin** control, and, if a **\bin** control is found, skip that many bytes before resuming its scanning for braces.

## A Sample RTF Reader Implementation

The Microsoft Word Processing Conversions group uses a table-driven approach to reading RTF. This approach allows the most flexibility in reading RTF but makes it difficult to detect incorrect RTF. An RTF reader based on this approach is presented in this section. This reader works exactly as described in the RTF specification and uses the principles of operation described within the RTF specification. This reader is designed to be simple to understand but is not intended to be efficient. This RTF reader also implements the three design principles listed in the previous section.

The RTF reader consists of the following four files:

- Rtfdecl.h, prototypes for all the functions in the RTF reader

- `Rtftype.h`, types used in the RTF reader
- `Rtfreadr.c`, main program, the main loop of the RTF reader, and the RTF control parser
- `Rtfactn.c`, dispatch routines for the RTF reader

### **Rtfdecl.h**

`Rtfdecl.h` is straightforward and requires little explanation.

#### `Rtfreadr.c`

Like `rtfdecl.h`, `rtfreadr.c` is also reasonably straightforward. The function **`ecRtfParse`** separates text from RTF controls and handles text, and the function **`ecParseRtfKeyword`** parses an RTF control and also collects any parameter that follows the RTF control.

### **Rtftype.h**

`Rtftype.h` begins by declaring a sample set of character, paragraph, section, and document properties. These structures are present to demonstrate how the dispatch routines can modify any particular property and are not actually used to format text.

For example, the following enumeration describes which destination text should be routed to:

```
typedef enum { rdsNorm, rdsSkip } RDS;
```

Because this is just a sample RTF reader, there are only two destinations. A more complicated reader would add an entry to this enumeration for each destination supported [for example, headers, footnotes, endnotes, comments (annotations), bookmarks, and pictures].

The following enumeration describes the internal state of the RTF parser:

```
typedef enum { risNorm, risBin, risHex } RIS;
```

This is entirely separate from the state of the dispatch routines and the destination state; other RTF readers may not necessarily have anything similar to this.

The following structure encapsulates the state that must be saved at a group start and restored at a group end:

```
typedef struct save
{
    struct save *pNext;
    CHP chp;
    PAP pap;
    SEP sep;
    DOP dop;
    RDS rds;
    RIS ris;
} SAVE;
```

The following enumeration describes a set of classes for RTF controls:

```
typedef enum {kwdChar, kwdDest, kwdProp, kwdSpec} KWD;
```

- Use **`kwdChar`** for controls that represent special characters (such as `\-`, `\{`, or `\}`).
- Use **`kwdDest`** for controls that introduce RTF destinations.
- Use **`kwdProp`** for controls that modify some sort of property.

- Use **kwdSpec** for controls that need to run some specialized code.

The following enumeration defines the number of PROP structures (described later) that will be used. There will typically be an **iprop** for every field in the character, paragraph, section, and document properties.

```
typedef enum {ipropBold, ipropItalic, ipropUnderline, ipropLeftInd,
ipropRightInd, ipropFirstInd, ipropCols, ipropPgnX, ipropPgnY,
ipropXaPage, ipropYaPage, ipropXaLeft, ipropXaRight,
ipropYaTop, ipropYaBottom, ipropPgnStart, ipropSbk,
ipropPgnFormat, ipropFacingp, ipropLandscape, ipropJust,
ipropPard, ipropPlain,
ipropMax} IPROP;
```

The following structure is a very compact way to describe how to locate the address of a particular value in one of the property structures:

```
typedef enum {actnSpec, actnByte, actnWord} ACTN;
typedef enum {propChp, propPap, propSep, propDop} PROPTYPE;
```

```
typedef struct propmod
{
ACTN actn;
PROPTYPE prop;
int offset;
} PROP;
```

The **actn** field describes the width of the value being described: if the value is a byte, then **actn** is **actnByte**; if the value is a word, then **actn** is **actnWord**; if the value is neither a byte nor a word, then you can use **actnSpec** to indicate that some C code needs to be run to set the value. The **prop** field indicates which property structure is being described; **propChp** indicates that the value is located within the CHP structure; **propPap** indicates that the value is located within the PAP structure, and so on. Finally, the offset field contains the offset of the value from the start of the structure. The **offsetof()** macro is usually used to initialize this field.

The following structure describes how to parse a particular RTF control:

```
typedef enum {ipfnBin, ipfnHex, ipfnSkipDest } IPFN;
typedef enum {idestPict, idestSkip } IDEST;
```

```
typedef struct symbol
{
char *szKeyword;
int dflt;
bool fPassDflt;
KWD kwd;
int idx;
```

```
} SYM;
```

**szKeyword** points to the RTF control being described; **kwd** describes the class of the particular RTF control (described earlier); **dflt** is the default value for this control, and **fPassDflt** should be nonzero if the value in **dflt** should be passed to the dispatch routine.

**Note** **fPassDflt** is only nonzero for control words that normally set a particular value. For example, the various section break controls typically have nonzero **fPassDflt** controls, but controls that take parameters should not.

**Idx** is a generalized index; its use depends on the **kwd** being used for this control.

- If **kwd** is **kwdChar**, then **idx** is the character that should be output.
- If **kwd** is **kwdDest**, then **idx** is the **idest** for the new destination.
- If **kwd** is **kwdProp**, then **idx** is the **iprop** for the appropriate property.
- If **kwd** is **kwdSpec**, then **idx** is an **ipfn** for the appropriate function.

With this structure it is very simple to dispatch an RTF control word. Once the reader isolates the RTF control word and its (possibly associated) value, the reader then searches an array of SYM structures to find the RTF control word. If the control word is not found, the RTF reader ignores it, unless the previous control was **\\***, in which case the reader must scan past an entire group.

If the control word is found, the reader then uses the **kwd** value from the SYM structure to determine what to do. This is, in fact, exactly what the function **ecTranslateKeyword** in the file **RTFACTN.C** does.

### Rtfactn.c

Rtfactn.c contains the tables describing the properties and control words, and the routines to evaluate properties (**ecApplyPropChange**) and to dispatch control words (**ecTranslateKeyword**).

The tables are the keys to understanding the RTF dispatch routines. The following are some sample entries from both tables, along with a brief explanation of each entry.

#### Property Table

This table must have an entry for every **iprop**.

```
actnByte,  propChp,  offsetof(CHP, fBold),      // ipropBold
```

This property says that the **ipropBold** property is a byte parameter bound to **chp.fBold**.

```
actnWord,  propPap,  offsetof(PAP, xaRight),    // ipropRightInd
```

This property says that **ipropRightInd** is a word parameter bound to **pap.xaRight**.

```
actnWord,  propSep,  offsetof(SEP, cCols),      // ipropCols
```

This property says that **ipropCols** is a word parameter bound to **sep.cCols**.

```
actnSpec,  propChp,  0,                          // ipropPlain
```

This property says that **ipropPlain** is a special parameter. Instead of directly evaluating it, **ecApplyPropChange** will run some custom C code to apply a property change.

#### Control Word Table

```
"b",      1,      fFalse,      kwdProp,      ipropBold,
```

This structure says that the control **\b** sets the **ipropBold** property. Because **fPassDflt** is **False**, the RTF reader only uses the default value if the control does not have a parameter. If no parameter is provided, the RTF reader uses a value of 1.

```
"sbknone", sbkNon, fTrue,      kwdProp,      ipropSbk,
```

This entry says that the control **\sbknone** sets the **ipropSbk** property. Because **fPassDflt** is **True**, the RTF reader always uses the default value of **sbkNon**, even if the control has a parameter.

```
"par",      0,      fFalse,      kwdChar,      0x0a,
```

This entry says that the control **\par** is equivalent to a 0x0a (linefeed) character.

```
"tab",      0,      fFalse,      kwdChar,      0x09,
```

This entry says that the control **\tab** is equivalent to a 0x09 (tab) character.

```
"bin",      0,      fFalse,      kwdSpec,      ipfnBin,
```

This entry says that the control **\bin** should run some C code. The particular piece of C code can be located by the **ipfnBin** parameter.

```
"fonttbl",  0,      fFalse,      kwdDest,      idestSkip,
```

This entry says that the control **\fonttbl** should change to the destination **idestSkip**.

## Notes on Implementing Other RTF Features

The table-driven approach to dispatching RTF controls used by the sample converter does not implement any syntax checking. For most controls this is not a problem; a control simply modifies the appropriate property. However, some controls, such as those for tabs and borders, are dependent on other control words either before or after the current control word.

There are some standard techniques for handling these features.

### Tabs and Other Control Sequences Terminating in a Fixed Control

The best way to implement these types of control sequences is to have a global structure that represents the current state of the tab descriptor (or other entity). As the modifiers come in, they modify the various fields of the global structure. When the fixed control at the end of the sequence is dispatched, it adds the entire descriptor and reinitializes the global variable.

### Borders and Other Control Sequences Beginning with a Fixed Control

The best way to implement these types of control sequences is to have a global pointer that is initialized when the fixed control is dispatched. The controls that modify the fixed control then modify fields pointed to by the control.

## Other Problem Areas in RTF

### Style Sheets

Style sheets can be handled as destinations. However, styles have default values, just as every other control does. RTF readers should be sure to handle a missing style control as the default style value (that is, 0).

### Property Changes

Some RTF readers use various bits of RTF syntax to mark property changes. In particular, they assume that property changes will occur only after a group start, which is not correct. Because there is a variety of ways to represent identical property changes in RTF, RTF readers should look at the changes in the properties and not at any particular way of representing a property change. In particular, properties can be changed explicitly with a control word or implicitly at the end of a group. For example, these three sequences of RTF have exactly the same semantics, and should be translated identically:

```
{\b bold \i Bold Italic \i0 Bold again}
```

```
{\b bold {\i Bold Italic }Bold again}
```

```
{\b bold \i Bold Italic \plain\b Bold again}
```

## Fields

All versions of Microsoft Word for Windows and version 6.0 and later of Microsoft Word for the Macintosh have fields. If you are writing an RTF reader and expect to do anything with fields, keep the following notes in mind:

- Field instructions may have arbitrary amounts of character formatting and arbitrarily nested groups. While the groups will be properly nested within the field instructions, you may already be inside an arbitrary number of groups by the time you know which field you are working with. If you then expect to be able to skip to the end of the field instructions, you'll have to know how many groups have started so that you can skip to the end properly.
- Some fields, the INCLUDE field in particular, can have section breaks in the field results. If this occurs, then the text after the end of the field does not have the same section properties as the text at the start of the field. Therefore, the section properties must not be restored when the field results contain section breaks.

## Tables

Tables are probably the hardest part of RTF to read and write correctly. Because of the way Microsoft word processors implement tables, and the table-driven approach of many Microsoft RTF readers, it is very easy to write tables in RTF that are not compatible with Microsoft word processors when you try to read the RTF. Here are some guidelines to reduce problems with tables in RTF:

- Place the entire table definition before any paragraph properties, including **\pard**.
- Verify that the number of cells in the RTF matches the number of cell definitions.
- Some controls must be the same in all paragraphs in a row. In particular, all paragraphs in a row must have the same positioning controls, and all paragraphs in a row must have **\intbl** specified.
- Do not use the **\sbys** control inside a table. **\sbys** is a holdover from Word for MS-DOS and early versions of Word for the Macintosh. Word for Windows and current versions of Word for the Macintosh translate **\sbys** as a table.
- Cell definitions starting before the left margin of the paper begins (that is, the parameter plus the left margin is negative) are always in error.

## • Appendix A-1: Listings

### Rtfdecl.h

```
// RTF parser declarations
int ecRtfParse(FILE *fp);
int ecPushRtfState(void);
int ecPopRtfState(void);
int ecParseRtfKeyword(FILE *fp);
int ecParseChar(int c);
int ecTranslateKeyword(char *szKeyword, int param, bool fParam);
int ecPrintChar(int ch);
int ecEndGroupAction(RDS rds);
```



```

int ecApplyPropChange(IPROP iprop, int val);
int ecChangeDest(IDEST idest);
int ecParseSpecialKeyword(IPFN ipfn);
int ecParseSpecialProperty(IPROP iprop, int val);
int ecParseHexByte(void);

// RTF variable declarations
extern int cGroup;
extern RDS rds;
extern RIS ris;
extern CHP chp;
extern PAP pap;
extern SEP sep;
extern DOP dop;
extern SAVE *psave;
extern long cbBin;
extern long lParam;
extern bool fSkipDestIfUnk;
extern FILE *fpIn;

// RTF parser error codes
#define ecOK 0 // Everything's fine!
#define ecStackUnderflow 1 // Unmatched '}'
#define ecStackOverflow 2 // Too many '{' -- memory exhausted
#define ecUnmatchedBrace 3 // RTF ended during an open group.
#define ecInvalidHex 4 // invalid hex character found in data
#define ecBadTable 5 // RTF table (sym or prop) invalid
#define ecAssertion 6 // Assertion failure
#define ecEndOfFile 7 // End of file reached while reading RTF

```

## **Rtftype.h**

```

typedef char bool;
#define fTrue 1
#define fFalse 0

typedef struct char_prop
{
    char fBold;

```

```

    char fUnderline;
    char fItalic;
} CHP;                // CCharacter Properties

typedef enum {justL, justR, justC, justF } JUST;
typedef struct para_prop
{
    int xaLeft;        // left indent in twips
    int xaRight;       // right indent in twips
    int xaFirst;       // first line indent in twips
    JUST just;         // justification
} PAP;                // PAragraph Properties

typedef enum {sbkNon, sbkCol, sbkEvn, sbkOdd, sbkPg} SBK;
typedef enum {pgDec, pgURom, pgLRom, pgULtr, pgLLtr} PGN;
typedef struct sect_prop
{
    int cCols;         // number of columns
    SBK sbk;           // section break type
    int xaPgn;         // x position of page number in twips
    int yaPgn;         // y position of page number in twips
    PGN pgnFormat;     // how the page number is formatted
} SEP;                // SEction Properties

typedef struct doc_prop
{
    int xaPage;        // page width in twips
    int yaPage;        // page height in twips
    int xaLeft;        // left margin in twips
    int yaTop;         // top margin in twips
    int xaRight;       // right margin in twips
    int yaBottom;      // bottom margin in twips
    int pgnStart;      // starting page number in twips
    char fFacingp;     // facing pages enabled?
    char fLandscape;   // landscape or portrait?
} DOP;                // DOcument Properties

```

```

typedef enum { rdsNorm, rdsSkip } RDS;           // Rtf Destination State
typedef enum { risNorm, risBin, risHex } RIS;     // Rtf Internal State

typedef struct save                               // property save structure
{
    struct save *pNext;                          // next save
    CHP chp;
    PAP pap;
    SEP sep;
    DOP dop;
    RDS rds;
    RIS ris;
} SAVE;

// What types of properties are there?
typedef enum {ipropBold, ipropItalic, ipropUnderline, ipropLeftInd,
             ipropRightInd, ipropFirstInd, ipropCols, ipropPgnX,
             ipropPgnY, ipropXaPage, ipropYaPage, ipropXaLeft,
             ipropXaRight, ipropYaTop, ipropYaBottom, ipropPgnStart,
             ipropSbk, ipropPgnFormat, ipropFacingp, ipropLandscape,
             ipropJust, ipropPard, ipropPlain, ipropSectd,
             ipropMax } IPROP;

typedef enum {actnSpec, actnByte, actnWord} ACTN;
typedef enum {propChp, propPap, propSep, propDop} PROPTYPE;

typedef struct propmod
{
    ACTN actn;                                    // size of value
    PROPTYPE prop;                                // structure containing value
    int offset;                                   // offset of value from base of structure
} PROP;

typedef enum {ipfnBin, ipfnHex, ipfnSkipDest } IPFN;
typedef enum {idestPict, idestSkip } IDEST;
typedef enum {kwdChar, kwdDest, kwdProp, kwdSpec} KWD;

```

```

typedef struct symbol
{
    char *szKeyword;           // RTF keyword
    int  dflt;                 // default value to use
    bool fPassDflt;            // true to use default value from this table
    KWD  kwd;                  // base action to take
    int  idx;                  // index into property table if kwd == kwdProp
                                // index into destination table if kwd == kwdDest
                                // character to print if kwd == kwdChar
} SYM;

```

### **Rtfreadr.c**

```

#include <stdio.h>
#include <stdlib.h>
#include <ctype.h>
#include "rtftype.h"
#include "rtfdecl.h"

```

```

int cGroup;
bool fSkipDestIfUnk;
long cbBin;
long lParam;

```

```

RDS rds;
RIS ris;

```

```

CHP chp;
PAP pap;
SEP sep;
DOP dop;

```

```

SAVE *psave;
FILE *fpIn;

```

```

// %%Function: main
//
// Main loop. Initialize and parse RTF.
main(int argc, char *argv[])

```

```

{
    FILE *fp;
    int ec;

    fp = fpIn = fopen("test.rtf", "r");
    if (!fp)
    {
        printf ("Can't open test file!\n");
        return 1;
    }
    if ((ec = ecRtfParse(fp)) != ecOK)
        printf("error %d parsing rtf\n", ec);
    else
        printf("Parsed RTF file OK\n");
    fclose(fp);
    return 0;
}

// %%Function: ecRtfParse
//
// Step 1:
// Isolate RTF keywords and send them to ecParseRtfKeyword;
// Push and pop state at the start and end of RTF groups;
// Send text to ecParseChar for further processing.

int ecRtfParse(FILE *fp)
{
    int ch;
    int ec;
    int cNibble = 2;
    int b = 0;
    while ((ch = getc(fp)) != EOF)
    {
        if (cGroup < 0)
            return ecStackUnderflow;

        if (ris == risBin) // if we're parsing binary data,
            handle it directly

```

```

{
    if ((ec = ecParseChar(ch)) != ecOK)
        return ec;
}
else
{
    switch (ch)
    {
    case '{':
        if ((ec = ecPushRtfState()) != ecOK)
            return ec;
        break;
    case '}':
        if ((ec = ecPopRtfState()) != ecOK)
            return ec;
        break;
    case '\\':
        if ((ec = ecParseRtfKeyword(fp)) != ecOK)
            return ec;
        break;
    case 0x0d:
    case 0x0a:          // cr and lf are noise characters...
        break;
    default:
        if (ris == risNorm)
        {
            if ((ec = ecParseChar(ch)) != ecOK)
                return ec;
        }
        else
        {
            // parsing hex data
            if (ris != risHex)
                return ecAssertion;
            b = b << 4;
            if (isdigit(ch))
                b += (char) ch - '0';
            else

```

```

        {
            if (islower(ch))
            {
                if (ch < 'a' || ch > 'f')
                    return ecInvalidHex;
                b += (char) ch - 'a';
            }
            else
            {
                if (ch < 'A' || ch > 'F')
                    return ecInvalidHex;
                b += (char) ch - 'A';
            }
        }
        cNibble--;
        if (!cNibble)
        {
            if ((ec = ecParseChar(b)) != ecOK)
                return ec;
            cNibble = 2;
            b = 0;
            ris = risNorm;
        }
    } // end else (ris != risNorm)
    break;
} // switch
} // else (ris != risBin)
} // while
if (cGroup < 0)
    return ecStackUnderflow;
if (cGroup > 0)
    return ecUnmatchedBrace;
return ecOK;
}

// %%Function: ecPushRtfState
//

```

```
// Save relevant info on a linked list of SAVE structures.
```

```
int ecPushRtfState(void)
```

```
{
    SAVE *psaveNew = malloc(sizeof(SAVE));
    if (!psaveNew)
        return ecStackOverflow;

    psaveNew -> pNext = psave;
    psaveNew -> chp = chp;
    psaveNew -> pap = pap;
    psaveNew -> sep = sep;
    psaveNew -> dop = dop;
    psaveNew -> rds = rds;
    psaveNew -> ris = ris;
    ris = risNorm;
    psave = psaveNew;
    cGroup++;
    return ecOK;
}
```

```
// %%Function: ecPopRtfState
```

```
//
```

```
// If we're ending a destination (that is, the destination is changing),
```

```
// call ecEndGroupAction.
```

```
// Always restore relevant info from the top of the SAVE list.
```

```
int ecPopRtfState(void)
```

```
{
    SAVE *psaveOld;
    int ec;

    if (!psave)
        return ecStackUnderflow;

    if (rds != psave->rds)
    {
```



```

        if ((ec = ecEndGroupAction(rds)) != ecOK)
            return ec;
    }
    chp = psave->chp;
    pap = psave->pap;
    sep = psave->sep;
    dop = psave->dop;
    rds = psave->rds;
    ris = psave->ris;

    psaveOld = psave;
    psave = psave->pNext;
    cGroup--;
    free(psaveOld);
    return ecOK;
}

// %%Function: ecParseRtfKeyword
//
// Step 2:
// get a control word (and its associated value) and
// call ecTranslateKeyword to dispatch the control.

int ecParseRtfKeyword(FILE *fp)
{
    int ch;
    char fParam = fFalse;
    char fNeg = fFalse;
    int param = 0;
    char *pch;
    char szKeyword[30];
    char szParameter[20];

    szKeyword[0] = '\\0';
    szParameter[0] = '\\0';
    if ((ch = getc(fp)) == EOF)
        return ecEndOfFile;

```

```

if (!isalpha(ch))          // a control symbol; no delimiter.
{
    szKeyword[0] = (char) ch;
    szKeyword[1] = '\\0';
    return ecTranslateKeyword(szKeyword, 0, fParam);
}
for (pch = szKeyword; isalpha(ch); ch = getc(fp))
    *pch++ = (char) ch;
*pch = '\\0';
if (ch == '-')
{
    fNeg = fTrue;
    if ((ch = getc(fp)) == EOF)
        return ecEndOfFile;
}
if (isdigit(ch))
{
    fParam = fTrue;          // a digit after the control means we have a
parameter
    for (pch = szParameter; isdigit(ch); ch = getc(fp))
        *pch++ = (char) ch;
    *pch = '\\0';
    param = atoi(szParameter);
    if (fNeg)
        param = -param;
    lParam = atol(szParameter);
    if (fNeg)
        param = -param;
}
if (ch != ' ')
    ungetc(ch, fp);
return ecTranslateKeyword(szKeyword, param, fParam);
}

// %%Function: ecParseChar
//
// Route the character to the appropriate destination stream.

```

```

int ecParseChar(int ch)
{
    if (ris == risBin && --cbBin <= 0)
        ris = risNorm;
    switch (rds)
    {
    case rdsSkip:
        // Toss this character.
        return ecOK;
    case rdsNorm:
        // Output a character. Properties are valid at this point.
        return ecPrintChar(ch);
    default:
        // handle other destinations....
        return ecOK;
    }
}

//
// %%Function: ecPrintChar
//
// Send a character to the output file.

int ecPrintChar(int ch)
{
    // unfortunately, we don't do a whole lot here as far as layout goes...
    putchar(ch);
    return ecOK;
}

RTFACTN.C

#include <stdio.h>
#include <string.h>
#include <stddef.h>
#include <ctype.h>
#include "rtftype.h"
#include "rtfdecl.h"

// RTF parser tables

```

```

// Property descriptions
PROP rgprop [ipropMax] = {
    actnByte,    propChp,    offsetof(CHP, fBold),        // ipropBold
    actnByte,    propChp,    offsetof(CHP, fItalic),        // ipropItalic
    actnByte,    propChp,    offsetof(CHP, fUnderline),      // ipropUnderline
    actnWord,    propPap,    offsetof(PAP, xaLeft),          // ipropLeftInd
    actnWord,    propPap,    offsetof(PAP, xaRight),          // ipropRightInd
    actnWord,    propPap,    offsetof(PAP, xaFirst),          // ipropFirstInd
    actnWord,    propSep,    offsetof(SEP, cCols),            // ipropCols
    actnWord,    propSep,    offsetof(SEP, xaPgn),            // ipropPgnX
    actnWord,    propSep,    offsetof(SEP, yaPgn),            // ipropPgnY
    actnWord,    propDop,    offsetof(DOP, xaPage),           // ipropXaPage
    actnWord,    propDop,    offsetof(DOP, yaPage),           // ipropYaPage
    actnWord,    propDop,    offsetof(DOP, xaLeft),           // ipropXaLeft
    actnWord,    propDop,    offsetof(DOP, xaRight),          // ipropXaRight
    actnWord,    propDop,    offsetof(DOP, yaTop),            // ipropYaTop
    actnWord,    propDop,    offsetof(DOP, yaBottom),         // ipropYaBottom
    actnWord,    propDop,    offsetof(DOP, pgnStart),         // ipropPgnStart
    actnByte,    propSep,    offsetof(SEP, sbk),             // ipropSbk
    actnByte,    propSep,    offsetof(SEP, pgnFormat),        // ipropPgnFormat
    actnByte,    propDop,    offsetof(DOP, fFacingp),         // ipropFacingp
    actnByte,    propDop,    offsetof(DOP, fLandscape),       // ipropLandscape
    actnByte,    propPap,    offsetof(PAP, just),             // ipropJust
    actnSpec,    propPap,    0,                                // ipropPard
    actnSpec,    propChp,    0,                                // ipropPlain
    actnSpec,    propSep,    0,                                // ipropSectd
};

```

```

// Keyword descriptions
SYM rgsymRtf[] = {
// keyword      dflt      fPassDflt    kwd          idx
    "b",         1,        fFalse,     kwdProp,     ipropBold,
    "u",         1,        fFalse,     kwdProp,     ipropUnderline,
    "i",         1,        fFalse,     kwdProp,     ipropItalic,
    "li",        0,        fFalse,     kwdProp,     ipropLeftInd,
    "ri",        0,        fFalse,     kwdProp,     ipropRightInd,
    "fi",        0,        fFalse,     kwdProp,     ipropFirstInd,

```

"cols",	1,	fFalse,	kwdProp,	ipropCols,
"sbknone",	sbkNon,	fTrue,	kwdProp,	ipropSbk,
"sbkcol",	sbkCol,	fTrue,	kwdProp,	ipropSbk,
"sbkeven",	sbkEvn,	fTrue,	kwdProp,	ipropSbk,
"sbkodd",	sbkOdd,	fTrue,	kwdProp,	ipropSbk,
"sbkpage",	sbkPg,	fTrue,	kwdProp,	ipropSbk,
"pgnx",	0,	fFalse,	kwdProp,	ipropPgnX,
"pgny",	0,	fFalse,	kwdProp,	ipropPgnY,
"pgndec",	pgDec,	fTrue,	kwdProp,	ipropPgnFormat,
"pgnucrm",	pgURom,	fTrue,	kwdProp,	ipropPgnFormat,
"pgnlcrm",	pgLRom,	fTrue,	kwdProp,	ipropPgnFormat,
"pgnucltr",	pgULtr,	fTrue,	kwdProp,	ipropPgnFormat,
"pgnlcltr",	pgLLtr,	fTrue,	kwdProp,	ipropPgnFormat,
"qc",	justC,	fTrue,	kwdProp,	ipropJust,
"ql",	justL,	fTrue,	kwdProp,	ipropJust,
"qr",	justR,	fTrue,	kwdProp,	ipropJust,
"qj",	justF,	fTrue,	kwdProp,	ipropJust,
"paperw",	12240,	fFalse,	kwdProp,	ipropXaPage,
"paperh",	15480,	fFalse,	kwdProp,	ipropYaPage,
"margl",	1800,	fFalse,	kwdProp,	ipropXaLeft,
"margr",	1800,	fFalse,	kwdProp,	ipropXaRight,
"margt",	1440,	fFalse,	kwdProp,	ipropYaTop,
"margb",	1440,	fFalse,	kwdProp,	ipropYaBottom,
"pgnstart",	1,	fTrue,	kwdProp,	ipropPgnStart,
"facingp",	1,	fTrue,	kwdProp,	ipropFacingp,
"landscape",	1,	fTrue,	kwdProp,	ipropLandscape,
"par",	0,	fFalse,	kwdChar,	0x0a,
"\0x0a",	0,	fFalse,	kwdChar,	0x0a,
"\0x0d",	0,	fFalse,	kwdChar,	0x0a,
"tab",	0,	fFalse,	kwdChar,	0x09,
"ldblquote",	0,	fFalse,	kwdChar,	'"',
"rdblquote",	0,	fFalse,	kwdChar,	'"',
"bin",	0,	fFalse,	kwdSpec,	ipfnBin,
"*",	0,	fFalse,	kwdSpec,	ipfnSkipDest,
"'",	0,	fFalse,	kwdSpec,	ipfnHex,
"author",	0,	fFalse,	kwdDest,	idestSkip,
"buptim",	0,	fFalse,	kwdDest,	idestSkip,

```

"colortbl", 0,      fFalse,      kwdDest,      idestSkip,
"comment",  0,      fFalse,      kwdDest,      idestSkip,
"creatim",  0,      fFalse,      kwdDest,      idestSkip,
"doccomm",  0,      fFalse,      kwdDest,      idestSkip,
"fonttbl",  0,      fFalse,      kwdDest,      idestSkip,
"footer",   0,      fFalse,      kwdDest,      idestSkip,
"footerf",  0,      fFalse,      kwdDest,      idestSkip,
"footerl",  0,      fFalse,      kwdDest,      idestSkip,
"footerr",  0,      fFalse,      kwdDest,      idestSkip,
"footnote", 0,      fFalse,      kwdDest,      idestSkip,
"ftncn",    0,      fFalse,      kwdDest,      idestSkip,
"ftnsep",   0,      fFalse,      kwdDest,      idestSkip,
"ftnsepc",  0,      fFalse,      kwdDest,      idestSkip,
"header",   0,      fFalse,      kwdDest,      idestSkip,
"headerf",  0,      fFalse,      kwdDest,      idestSkip,
"headerl",  0,      fFalse,      kwdDest,      idestSkip,
"headerr",  0,      fFalse,      kwdDest,      idestSkip,
"info",     0,      fFalse,      kwdDest,      idestSkip,
"keywords", 0,      fFalse,      kwdDest,      idestSkip,
"operator", 0,      fFalse,      kwdDest,      idestSkip,
"pict",     0,      fFalse,      kwdDest,      idestSkip,
"printim",  0,      fFalse,      kwdDest,      idestSkip,
"private1", 0,      fFalse,      kwdDest,      idestSkip,
"revtim",   0,      fFalse,      kwdDest,      idestSkip,
"rxex",     0,      fFalse,      kwdDest,      idestSkip,
"stylesheet", 0,      fFalse,      kwdDest,      idestSkip,
"subject",  0,      fFalse,      kwdDest,      idestSkip,
"tc",       0,      fFalse,      kwdDest,      idestSkip,
"title",    0,      fFalse,      kwdDest,      idestSkip,
"txex",     0,      fFalse,      kwdDest,      idestSkip,
"xex",      0,      fFalse,      kwdDest,      idestSkip,
"{",        0,      fFalse,      kwdChar,      '{',
"}",        0,      fFalse,      kwdChar,      '}',
"\\",       0,      fFalse,      kwdChar,      '\\\
};

```

```
int isymMax = sizeof(rgsymRtf) / sizeof(SYM);
```

```

// %%Function: ecApplyPropChange
// Set the property identified by _iprop_ to the value _val_.

int ecApplyPropChange(IPROP iprop, int val)
{
    char *pb;
    if (rds == rdsSkip)                // If we're skipping text,
        return ecOK;                  // don't do anything.

    switch (rgprop[iprop].prop)
    {
    case propDop:
        pb = (char *)&dop;
        break;
    case propSep:
        pb = (char *)&sep;
        break;
    case propPap:
        pb = (char *)&pap;
        break;
    case propChp:
        pb = (char *)&chp;
        break;
    default:
        if (rgprop[iprop].actn != actnSpec)
            return ecBadTable;
        break;
    }
    switch (rgprop[iprop].actn)
    {
    case actnByte:
        pb[rgprop[iprop].offset] = (unsigned char) val;
        break;
    case actnWord:
        (*(int *) (pb+rgprop[iprop].offset)) = val;
        break;
    case actnSpec:

```

```

        return ecParseSpecialProperty(iprop, val);
        break;
default:
    return ecBadTable;
}
return ecOK;
}

```

```

// %%Function: ecParseSpecialProperty
// Set a property that requires code to evaluate.

```

```

int ecParseSpecialProperty(IPROP iprop, int val)
{
    switch (iprop)
    {
        case ipropPard:
            memset(&pap, 0, sizeof(pap));
            return ecOK;
        case ipropPlain:
            memset(&chp, 0, sizeof(chp));
            return ecOK;
        case ipropSectd:
            memset(&sep, 0, sizeof(sep));
            return ecOK;
        default:
            return ecBadTable;
    }
    return ecBadTable;
}

```

```

// %%Function: ecTranslateKeyword.
// Step 3.
// Search rgSYMRTF for szKeyword and evaluate it appropriately.
// Inputs:
// szKeyword:    The RTF control to evaluate.
// param:        The parameter of the RTF control.
// fParam:       fTrue if the control had a parameter; (that is, if param is valid)

```



```

//                fFalse if it did not.

int ecTranslateKeyword(char *szKeyword, int param, bool fParam)
{
    int isym;

    // search for szKeyword in rgsymRtf
    for (isym = 0; isym < isymMax; isym++)
        if (strcmp(szKeyword, rgsymRtf[isym].szKeyword) == 0)
            break;
    if (isym == isymMax)                // control word not found
    {
        if (fSkipDestIfUnk)            // if this is a new destination
            rds = rdsSkip;              // skip the destination
                                        // else just discard it

        fSkipDestIfUnk = fFalse;
        return ecOK;
    }

    // found it!  use kwd and idx to determine what to do with it.
    fSkipDestIfUnk = fFalse;
    switch (rgsymRtf[isym].kwd)
    {
    case kwdProp:
        if (rgsymRtf[isym].fPassDflt || !fParam)
            param = rgsymRtf[isym].dflt;
        return ecApplyPropChange(rgsymRtf[isym].idx, param);
    case kwdChar:
        return ecParseChar(rgsymRtf[isym].idx);
    case kwdDest:
        return ecChangeDest(rgsymRtf[isym].idx);
    case kwdSpec:
        return ecParseSpecialKeyword(rgsymRtf[isym].idx);
    default:
        return ecBadTable;
    }
    return ecBadTable;
}

```

```

}

// %%Function: ecChangeDest
// Change to the destination specified by idest.
// There's usually more to do here than this...

int ecChangeDest(IDEST idest)
{
    if (rds == rdsSkip)                // if we're skipping text,
        return ecOK;                  // don't do anything

    switch (idest)
    {
    default:
        rds = rdsSkip;                // when in doubt, skip it...
        break;
    }
    return ecOK;
}

// %%Function: ecEndGroupAction
// The destination specified by rds is coming to a close.
// If there's any cleanup that needs to be done, do it now.

int ecEndGroupAction(RDS rds)
{
    return ecOK;
}

// %%Function: ecParseSpecialKeyword
// Evaluate an RTF control that needs special processing.

int ecParseSpecialKeyword(IPFN ipfn)
{
    if (rds == rdsSkip && ipfn != ipfnBin) // if we're skipping, and it's not
        return ecOK;                      // the \bin keyword, ignore it.
    switch (ipfn)

```

```

{
case ipfnBin:
    ris = risBin;
    cbBin = lParam;
    break;
case ipfnSkipDest:
    fSkipDestIfUnk = fTrue;
    break;
case ipfnHex:
    ris = risHex;
break;
default:
    return ecBadTable;
}
return ecOK;
}

```

## Makefile

```

rtfreadr.exe: rtfactn.obj rtfreadr.obj
    link rtfreadr.obj rtfactn.obj <nul

rtfactn.obj: rtfactn.c rtfdecl.h rtftype.h

rtfreadr.obj: rtfreadr.c rtfdecl.h rtftype.h

```

## Appendix B: Index of RTF Control Words

The control word table contains a list of each RTF control word, the name of the section where it may be found, and its type. The types are described in the following table.

Type	Meaning
Flag	This control word ignores any parameter.
Destination	This control word starts a group or destination. It ignores any parameter.
Symbol	This control word represents a special character.
Toggle	This control word distinguishes between the ON and OFF states for the given property. The control word with no parameter or a nonzero parameter is used to turn on the property, while the control word with a zero parameter is used to turn it off.
Value	This control word requires a parameter.

**Note** In the following table, the names of all control words added in version 7.0 or later are flagged with the version number in which they were added (7.0, 97, 2000, 2002, and 2003).

**Special Characters and A–B**

Control word	Described in section	Type
--------------	----------------------	------

\'	<a href="#">Special Characters</a>	Symbol
\-	<a href="#">Special Characters</a>	Symbol
\*	<a href="#">Special Characters</a>	Symbol
\:	<a href="#">Special Characters</a>	Symbol
\\	<a href="#">Special Characters</a>	Symbol
\_	<a href="#">Special Characters</a>	Symbol
\{	<a href="#">Special Characters</a>	Symbol
\	<a href="#">Special Characters</a>	Symbol
\}	<a href="#">Special Characters</a>	Symbol
\~	<a href="#">Special Characters</a>	Symbol
\ab	<a href="#">Associated Character Properties</a>	Toggle
\absh	<a href="#">Positioned Objects and Frames</a>	Value
\abslock <sup>7.0</sup>	<a href="#">Positioned Objects and Frames</a>	Flag
<b>\absnoovrlpN</b> <sup>2000</sup>	<a href="#">Positioned Objects and Frames</a>	Toggle
\absw	<a href="#">Positioned Objects and Frames</a>	Value
\acaps	<a href="#">Associated Character Properties</a>	Toggle
\acccomma <sup>7.0</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
\accdot <sup>7.0</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
\accnone <sup>7.0</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
\accircle <sup>2003</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
\accunderdot <sup>2003</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
\acf	<a href="#">Associated Character Properties</a>	Value
\additive	<a href="#">Style Sheet</a>	Flag
\adjustright <sup>97</sup>	<a href="#">Section Formatting Properties</a>	Flag
\adn	<a href="#">Associated Character Properties</a>	Value
\aenddoc	<a href="#">Document Formatting Properties</a>	Flag
\aendnotes	<a href="#">Document formatting Properties</a>	Flag
\aexpnd	<a href="#">Associated Character Properties</a>	Value
\af	<a href="#">Associated Character Properties</a>	Value
\affixed <sup>7.0</sup>	<a href="#">Paragraph Formatting Properties</a>	Flag
\afs	<a href="#">Associated Character Properties</a>	Value
\aftnbj	<a href="#">Document Formatting Properties</a>	Flag
\aftncn	<a href="#">Document Formatting Properties</a>	Destination
\aftnnalc	<a href="#">Document Formatting Properties</a>	Flag
\aftnnar	<a href="#">Document Formatting Properties</a>	Flag
\aftnnauc	<a href="#">Document Formatting Properties</a>	Flag
\aftnnchi	<a href="#">Document Formatting Properties</a>	Flag
\aftnnchosung <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\aftnncnum <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\aftnndbar <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\aftnndbnum <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\aftnndbnumd <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag

\aftnndbnumk <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\aftnndbnumt <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\aftnnganada <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\aftnngbnum <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\aftnngbnumd <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\aftnngbnumk <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\aftnngbnuml <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\aftnnrlc	<a href="#">Document Formatting Properties</a>	Flag
\aftnnruc	<a href="#">Document Formatting Properties</a>	Flag
\aftnnzodiac <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\aftnnzodiacd <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\aftnnzodiacl <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\aftnrestart	<a href="#">Document Formatting Properties</a>	Flag
\aftnrstcont	<a href="#">Document Formatting Properties</a>	Flag
\aftnsep	<a href="#">Document Formatting Properties</a>	Destination
\aftnsepc	<a href="#">Document Formatting Properties</a>	Destination
\aftnstart	<a href="#">Document Formatting Properties</a>	Value
\aftntj	<a href="#">Document Formatting Properties</a>	Flag
\ai	<a href="#">Associated Character Properties</a>	Toggle
\alang	<a href="#">Associated Character Properties</a>	Value
<b>\allowfieldendsel</b> <sup>2002</sup>	<a href="#">Document Formatting Properties</a>	Flag
\allprot	<a href="#">Document Formatting Properties</a>	Flag
<b>\alntblind</b> <sup>2000</sup>	<a href="#">Document Formatting Properties</a>	Flag
\alt	<a href="#">Style Sheet</a>	Flag
\animtextN <sup>97</sup>	<a href="#">Font (Character) Formatting Properties</a>	Value
\annotation	<a href="#">Comments (Annotations)</a>	Destination
\annotprot	<a href="#">Document Formatting Properties</a>	Flag
\ansi	<a href="#">Character Set</a>	Flag
\ansicpgN <sup>97</sup>	<a href="#">Unicode RTE</a>	Value
\aoutl	<a href="#">Associated Character Properties</a>	Toggle
<b>\ApplyBrkRules</b> <sup>2002</sup>	<a href="#">Document Formatting Properties</a>	Flag
\ascaps	<a href="#">Associated Character Properties</a>	Toggle
\ashad	<a href="#">Associated Character Properties</a>	Toggle
<b>\asianbrkrule</b> <sup>2002</sup>	<a href="#">Document Formatting Properties</a>	Flag
\asalpha <sup>7.0</sup>	<a href="#">Paragraph Formatting Properties</a>	Toggle
\aspnum <sup>7.0</sup>	<a href="#">Paragraph Formatting Properties</a>	Toggle
\astrike	<a href="#">Associated Character Properties</a>	Toggle
\atnauthor <sup>2002</sup>	<a href="#">Comments (Annotations)</a>	Destination
<b>\atndate</b>	<a href="#">Comments (Annotations)</a>	Destination
\atnicn	<a href="#">Comments (Annotations)</a>	Destination
\atnid	<a href="#">Comments (Annotations)</a>	Destination
\atnparent <sup>2002</sup>	<a href="#">Comments (Annotations)</a>	Destination

\atnref	<a href="#">Comments (Annotations)</a>	Destination
\atntime	<a href="#">Comments (Annotations)</a>	Destination
\atr fend	<a href="#">Comments (Annotations)</a>	Destination
\atr fstart	<a href="#">Comments (Annotations)</a>	Destination
\aul	<a href="#">Associated Character Properties</a>	Toggle
\auld	<a href="#">Associated Character Properties</a>	Toggle
\auldb	<a href="#">Associated Character Properties</a>	Toggle
\aulnone	<a href="#">Associated Character Properties</a>	Toggle
\aulw	<a href="#">Associated Character Properties</a>	Toggle
\aup	<a href="#">Associated Character Properties</a>	Value
\author	<a href="#">Information Group</a>	Destination
\autofmtoverride <sup>2003</sup>	<a href="#">Document Formatting Properties</a>	Flag
\b	<a href="#">Font (Character) Formatting Properties</a>	Toggle
\background <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Destination
\bdbfhdr <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
<b>\bdr rls w s i x</b> <sup>2000</sup>	<a href="#">Document Formatting Properties</a>	Flag
\bgbdiag	<a href="#">Paragraph Shading</a>	Flag
\bgcross	<a href="#">Paragraph Shading</a>	Flag
\bgdcross	<a href="#">Paragraph Shading</a>	Flag
\bgdkbdiag	<a href="#">Paragraph Shading</a>	Flag
\bgdkcross	<a href="#">Paragraph Shading</a>	Flag
\bgdkdcross	<a href="#">Paragraph Shading</a>	Flag
\bgdkfdiag	<a href="#">Paragraph Shading</a>	Flag
\bgdkhoriz	<a href="#">Paragraph Shading</a>	Flag
\bgdkvert	<a href="#">Paragraph Shading</a>	Flag
\bgfdiag	<a href="#">Paragraph Shading</a>	Flag
\bghoriz	<a href="#">Paragraph Shading</a>	Flag
\bgvert	<a href="#">Paragraph Shading</a>	Flag
\bin	<a href="#">Pictures</a>	Value
\binfsxn	<a href="#">Section Formatting Properties</a>	Value
\binsxn	<a href="#">Section Formatting Properties</a>	Value
\bkmkcolf	<a href="#">Bookmarks</a>	Value
\bkmkcoll	<a href="#">Bookmarks</a>	Value
\bkmkend	<a href="#">Bookmarks</a>	Destination
\bkmkpub	<a href="#">Macintosh Edition Manager Publisher Objects</a>	Flag
\bkmkstart	<a href="#">Bookmarks</a>	Destination
\bliptagN <sup>97</sup>	<a href="#">Pictures</a>	Value
\blipuid <sup>97</sup>	<a href="#">Pictures</a>	Value
\blipupiN <sup>97</sup>	<a href="#">Pictures</a>	Value
\blue	<a href="#">Color Table</a>	Value
<b>\bookfold</b> <sup>2002</sup>	<a href="#">Document Formatting Properties</a>	Flag

<b>\bookfoldrev</b> <sup>2002</sup>	<a href="#">Document Formatting Properties</a>	Flag
<b>\bookfoldsheetsN</b> <sup>2002</sup>	<a href="#">Document Formatting Properties</a>	Value
\box	<a href="#">Paragraph Borders</a>	Flag
\brdrartN <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Value
\brdrb	<a href="#">Paragraph Borders</a>	Flag
\brdrbar	<a href="#">Paragraph Borders</a>	Flag
\brdrbtw	<a href="#">Paragraph Borders</a>	Flag
\brdrbf	<a href="#">Paragraph Borders</a>	Value
\brdrdash	<a href="#">Paragraph Borders</a>	Flag
\brdrdashd <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\brdrdashdd <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\brdrdashdotstr <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\brdrdashsm <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\brdrdb	<a href="#">Paragraph Borders</a>	Flag
\brdrdot	<a href="#">Paragraph Borders</a>	Flag
\brdreboss <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\brdregrave <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\brdrframe <sup>97</sup>	<a href="#">Paragraph Borders</a>	Flag
\brdrhair	<a href="#">Paragraph Borders</a>	Flag
<b>\brdrinset</b> <sup>2000</sup>	<a href="#">Paragraph Text</a>	Flag
\brdrl	<a href="#">Paragraph Borders</a>	Flag
<b>\brdrnil</b> <sup>2002</sup>	<a href="#">Paragraph Borders</a>	Flag
<b>\brdroutset</b> <sup>2000</sup>	<a href="#">Paragraph Text</a>	Flag
\brdr	<a href="#">Paragraph Borders</a>	Flag
\brdrs	<a href="#">Paragraph Borders</a>	Flag
\brdrsh	<a href="#">Paragraph Borders</a>	Flag
\brdrt	<a href="#">Paragraph Borders</a>	Flag
\brdrtbl <sup>2002</sup>	<a href="#">Paragraph Borders</a>	Flag
\brdrth	<a href="#">Paragraph Borders</a>	Flag
\brdrthtnlg <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\brdrthtnmg <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\brdrthtnsg <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\brdrtnthlg <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\brdrtnthmg <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\brdrtnthsg <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\brdrtnthtnlg <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\brdrtnthtnmg <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\brdrtnthtnsg <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\brdrtriple <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\brdrw	<a href="#">Paragraph Borders</a>	Value
\brdrwavy <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\brdrwavydb <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag



\brkfrm	<a href="#">Document Formatting Properties</a>	Flag
\brsp	<a href="#">Paragraph Borders</a>	Value
\bullet	<a href="#">Special Characters</a>	Symbol
\buptim	<a href="#">Information Group</a>	Destination
\bxe	<a href="#">Index Entries</a>	Flag

**C-E**

\caps	<a href="#">Font (Character) Formatting Properties</a>	Toggle
\category <sup>7.0</sup>	<a href="#">Information Group</a>	Destination
\cb	<a href="#">Font (Character) Formatting Properties</a>	Value
\cbpat	<a href="#">Paragraph Shading</a>	Value
\cchs	<a href="#">Font (Character) Formatting Properties</a>	Value
\cell	<a href="#">Special Characters</a>	Symbol
\cellx	<a href="#">Table Definitions</a>	Value
\cf	<a href="#">Font (Character) Formatting Properties</a>	Value
\cfpat	<a href="#">Paragraph Shading</a>	Value
\cgridN <sup>97</sup>	<a href="#">Font (Character) Formatting Properties</a>	Value
\charrsidN <sup>2002</sup>	<a href="#">Track Changes (Revision Marks)</a>	Value
\charscalex <sup>7.0</sup>	<a href="#">Font (Character) Formatting Properties</a>	Value
\charscalexN <sup>97</sup>	<a href="#">Character Text</a>	Value
\chatn	<a href="#">Special Characters</a>	Symbol
\chbgbdiag <sup>97</sup>	<a href="#">Character Text</a>	Flag
\chbgcross <sup>97</sup>	<a href="#">Character Text</a>	Flag
\chbgdcross <sup>97</sup>	<a href="#">Character Text</a>	Flag
\chbgdkbdiag <sup>97</sup>	<a href="#">Character Text</a>	Flag
\chbgdkcross <sup>97</sup>	<a href="#">Character Text</a>	Flag
\chbgdkdcross <sup>97</sup>	<a href="#">Character Text</a>	Flag
\chbgdkfdiag <sup>97</sup>	<a href="#">Character Text</a>	Flag
\chbgdkhoriz <sup>97</sup>	<a href="#">Character Text</a>	Flag
\chbgdkvert <sup>97</sup>	<a href="#">Character Text</a>	Flag
\chbgfdiag <sup>97</sup>	<a href="#">Character Text</a>	Flag
\chbghoriz <sup>97</sup>	<a href="#">Character Text</a>	Flag
\chbgvert <sup>97</sup>	<a href="#">Character Text</a>	Flag
\chbrdr <sup>97</sup>	<a href="#">Character Text</a>	Flag
\chcbpatN <sup>97</sup>	<a href="#">Character Text</a>	Value
\chcfpatN <sup>97</sup>	<a href="#">Character Text</a>	Value
\chdate	<a href="#">Special Characters</a>	Symbol
\chdpa	<a href="#">Special Characters</a>	Symbol
\chdpl	<a href="#">Special Characters</a>	Symbol
\chftn	<a href="#">Special Characters</a>	Symbol
\chftnsep	<a href="#">Special Characters</a>	Symbol
\chftnsepc	<a href="#">Special Characters</a>	Symbol
\chpgn	<a href="#">Special Characters</a>	Symbol
\chshdngN <sup>97</sup>	<a href="#">Character Text</a>	Value
\chtime	<a href="#">Special Characters</a>	Symbol
\clbgbdiag	<a href="#">Table Definitions</a>	Flag
\clbgcross	<a href="#">Table Definitions</a>	Flag
\clbgdcross	<a href="#">Table Definitions</a>	Flag
\clbgdkbdiag	<a href="#">Table Definitions</a>	Flag

\clbgdkcross	<a href="#">Table Definitions</a>	Flag
\clbgdkdcross	<a href="#">Table Definitions</a>	Flag
\clbgdkfdiag	<a href="#">Table Definitions</a>	Flag
\clbgdkhor	<a href="#">Table Definitions</a>	Flag
\clbgdkvert	<a href="#">Table Definitions</a>	Flag
\clbgfdiag	<a href="#">Table Definitions</a>	Flag
\clbgghoriz	<a href="#">Table Definitions</a>	Flag
\clbgvert	<a href="#">Table Definitions</a>	Flag
\clbrdrb	<a href="#">Table Definitions</a>	Flag
\clbrdrl	<a href="#">Table Definitions</a>	Flag
\clbrdr	<a href="#">Table Definitions</a>	Flag
\clbrdr	<a href="#">Table Definitions</a>	Flag
\clcbpat	<a href="#">Table Definitions</a>	Value
\clcbpatrawN <sup>2002</sup>	<a href="#">Table Definitions</a>	Value
\clcfpat	<a href="#">Table Definitions</a>	Value
\clcfpatrawN <sup>2002</sup>	<a href="#">Table Definitions</a>	Value
\cldgll <sup>7.0</sup>	<a href="#">Table Definitions</a>	Flag
\cldglu <sup>7.0</sup>	<a href="#">Table Definitions</a>	Flag
\clFitText <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
\clftsWidthN <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
\clmgf	<a href="#">Table Definitions</a>	Flag
\clmrg	<a href="#">Table Definitions</a>	Flag
\clNoWrap <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
\clpadbN <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
\clpadfbN <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
\clpadflN <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
\clpadfrN <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
\clpadftN <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
\clpadlN <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
\clpadrN <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
\clpadtN <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
\clshdng	<a href="#">Table Definitions</a>	Value
\clshdngraw <sup>2002</sup>	<a href="#">Table Definitions</a>	Value
\clshdrawnil <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
\cltxbtlr <sup>7.0</sup>	<a href="#">Table Definitions</a>	Flag
\cltxlrb <sup>7.0</sup>	<a href="#">Table Definitions</a>	Flag
\cltxlrb <sup>97</sup>	<a href="#">Table Definitions</a>	Flag
\cltxlrbv <sup>7.0</sup>	<a href="#">Table Definitions</a>	Flag
\cltxtbrl <sup>7.0</sup>	<a href="#">Table Definitions</a>	Flag
\cltxtbrl <sup>97</sup>	<a href="#">Table Definitions</a>	Flag
\cltxtbrlv <sup>7.0</sup>	<a href="#">Table Definitions</a>	Flag
\clvertalb <sup>7.0</sup>	<a href="#">Table Definitions</a>	Flag

<code>\clvertalc</code> <sup>7.0</sup>	<a href="#">Table Definitions</a>	Flag
<code>\clvertalt</code> <sup>7.0</sup>	<a href="#">Table Definitions</a>	Flag
<code>\clvmgf</code> <sup>7.0</sup>	<a href="#">Table Definitions</a>	Flag
<code>\clvmrg</code> <sup>7.0</sup>	<a href="#">Table Definitions</a>	Flag
<code>\clwWidthN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\collapsed</code>	<a href="#">Paragraph Formatting Properties</a>	Flag
<code>\colno</code>	<a href="#">Section Formatting Properties</a>	Value
<code>\colortbl</code>	<a href="#">Color Table</a>	Destination
<code>\cols</code>	<a href="#">Section Formatting Properties</a>	Value
<code>\colsr</code>	<a href="#">Section Formatting Properties</a>	Value
<code>\colsx</code>	<a href="#">Section Formatting Properties</a>	Value
<code>\column</code>	<a href="#">Special Characters</a>	Symbol
<code>\colw</code>	<a href="#">Section Formatting Properties</a>	Value
<code>\comment</code>	<a href="#">Information Group</a>	Destination
<code>\company</code> <sup>7.0</sup>	<a href="#">Information Group</a>	Destination
<code>\cpg</code>	<a href="#">Code Page Support</a>	Value
<code>\crauthN</code> <sup>97</sup>	<a href="#">Character Text</a>	Value
<code>\crdateN</code> <sup>97</sup>	<a href="#">Character Text</a>	Value
<code>\creatim</code>	<a href="#">Information Group</a>	Destination
<code>\cs</code>	<a href="#">Font (Character) Formatting Properties</a>	Value
<code>\ctrl</code>	<a href="#">Style Sheet</a>	Flag
<code>\ctsN</code> <sup>2000</sup>	<a href="#">Document Formatting Properties</a>	Value
<code>\cufiN</code> <sup>2000</sup>	<a href="#">Paragraph Formatting Properties</a>	Value
<code>\culiN</code> <sup>2000</sup>	<a href="#">Paragraph Formatting Properties</a>	Value
<code>\curiN</code> <sup>2000</sup>	<a href="#">Paragraph Formatting Properties</a>	Value
<code>\cvmme</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\datafield</code>	<a href="#">Fields</a>	Destination
<code>\date</code> <sup>97</sup>	<a href="#">Fields</a>	Flag
<code>\dbch</code> <sup>7.0</sup>	<a href="#">Associated Character Properties</a>	Flag
<code>\deff</code>	<a href="#">Font Table</a>	Value
<code>\defformat</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\deflang</code>	<a href="#">Document Formatting Properties</a>	Value
<code>\deflangfe</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Value
<code>\defshp</code> <sup>2000</sup>	<a href="#">Pictures</a>	Flag
<code>\deftab</code>	<a href="#">Document Formatting Properties</a>	Value
<code>\deleted</code>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\delrsidN</code> <sup>2002</sup>	<a href="#">Track Changes (Revision Marks)</a>	Value
<code>\dfrauthN</code> <sup>97</sup>	<a href="#">Paragraph Text</a>	Value
<code>\dfrdateN</code> <sup>97</sup>	<a href="#">Paragraph Text</a>	Value
<code>\dfrmttxtx</code>	<a href="#">Positioned Objects and Frames</a>	Value
<code>\dfrmttxy</code>	<a href="#">Positioned Objects and Frames</a>	Value
<code>\dfrstart</code> <sup>97</sup>	<a href="#">Paragraph Text</a>	Value

\dfrstop <sup>97</sup>	<a href="#">Paragraph Text</a>	Value
\dfrxst <sup>97</sup>	<a href="#">Paragraph Text</a>	Value
\dghorigin <sup>7.0</sup>	<a href="#">Document Formatting Properties</a>	Value
\dghshow <sup>7.0</sup>	<a href="#">Document Formatting Properties</a>	Value
\dghspace <sup>7.0</sup>	<a href="#">Document Formatting Properties</a>	Value
\dgmargi <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\dgsnap <sup>7.0</sup>	<a href="#">Document Formatting Properties</a>	Flag
\dgvorigi <sup>7.0</sup>	<a href="#">Document Formatting Properties</a>	Value
\dgvshow <sup>7.0</sup>	<a href="#">Document Formatting Properties</a>	Value
\dgvspace <sup>7.0</sup>	<a href="#">Document Formatting Properties</a>	Value
\dibitmap	<a href="#">Pictures</a>	Value
\dn	<a href="#">Font (Character) Formatting Properties</a>	Value
\dntblnsbdb <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\do	<a href="#">Drawing Objects</a>	Destination
\dobxcolumn	<a href="#">Drawing Objects</a>	Flag
\dobxmargin	<a href="#">Drawing Objects</a>	Flag
\dobxpage	<a href="#">Drawing Objects</a>	Flag
\dobymargin	<a href="#">Drawing Objects</a>	Flag
\dobypage	<a href="#">Drawing Objects</a>	Flag
\dobypara	<a href="#">Drawing Objects</a>	Flag
\doccomm	<a href="#">Information Group</a>	Destination
\doctemp	<a href="#">Document Formatting Properties</a>	Flag
\doctypeN <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Value
\docvar <sup>7.0</sup>	<a href="#">Document Variables</a>	Destination
\dodhgt	<a href="#">Drawing Objects</a>	Value
\dolock	<a href="#">Drawing Objects</a>	Flag
\donotshowcomments <sup>2002</sup>	<a href="#">Document Formatting Properties</a>	Flag
\donotshowinsdel <sup>2002</sup>	<a href="#">Document Formatting Properties</a>	Flag
\donotshowmarkup <sup>2002</sup>	<a href="#">Document Formatting Properties</a>	Flag
\donotshowprops <sup>2002</sup>	<a href="#">Document Formatting Properties</a>	Flag
\dpaendhol	<a href="#">Drawing Objects</a>	Flag
\dpaendl	<a href="#">Drawing Objects</a>	Value
\dpaendsol	<a href="#">Drawing Objects</a>	Flag
\dpaendw	<a href="#">Drawing Objects</a>	Value
\dparc	<a href="#">Drawing Objects</a>	Flag
\dparcflipx	<a href="#">Drawing Objects</a>	Flag
\dparcflipy	<a href="#">Drawing Objects</a>	Flag
\dpastarthol	<a href="#">Drawing Objects</a>	Flag
\dpastartl	<a href="#">Drawing Objects</a>	Value
\dpastartsol	<a href="#">Drawing Objects</a>	Flag
\dpastartw	<a href="#">Drawing Objects</a>	Value
\dpcallout	<a href="#">Drawing Objects</a>	Flag

\dpcoa	<a href="#">Drawing Objects</a>	Value
\dpcoaccent	<a href="#">Drawing Objects</a>	Flag
\dpcobestfit	<a href="#">Drawing Objects</a>	Flag
\dpcoborder	<a href="#">Drawing Objects</a>	Flag
\dpcodabs	<a href="#">Drawing Objects</a>	Value
\dpcodbottom	<a href="#">Drawing Objects</a>	Flag
\dpcodcenter	<a href="#">Drawing Objects</a>	Flag
\dpcodescent	<a href="#">Drawing Objects</a>	Value
\dpcodtop	<a href="#">Drawing Objects</a>	Flag
\dpcolength	<a href="#">Drawing Objects</a>	Value
\dpcominusx	<a href="#">Drawing Objects</a>	Flag
\dpcominusy	<a href="#">Drawing Objects</a>	Flag
\dpcooffset	<a href="#">Drawing Objects</a>	Value
\dpcosmarta	<a href="#">Drawing Objects</a>	Flag
\dpcotdouble	<a href="#">Drawing Objects</a>	Flag
\dpcotright	<a href="#">Drawing Objects</a>	Flag
\dpcotsingle	<a href="#">Drawing Objects</a>	Flag
\dpcottriple	<a href="#">Drawing Objects</a>	Flag
\dpcount	<a href="#">Drawing Objects</a>	Value
\dpellipse	<a href="#">Drawing Objects</a>	Flag
\dependgroup	<a href="#">Drawing Objects</a>	Flag
\dpfillbgcb	<a href="#">Drawing Objects</a>	Value
\dpfillbgcg	<a href="#">Drawing Objects</a>	Value
\dpfillbgcr	<a href="#">Drawing Objects</a>	Value
\dpfillbggray	<a href="#">Drawing Objects</a>	Value
\dpfillbgpal	<a href="#">Drawing Objects</a>	Flag
\dpfillfgcb	<a href="#">Drawing Objects</a>	Value
\dpfillfgcg	<a href="#">Drawing Objects</a>	Value
\dpfillfgcr	<a href="#">Drawing Objects</a>	Value
\dpfillfggray	<a href="#">Drawing Objects</a>	Value
\dpfillfgpal	<a href="#">Drawing Objects</a>	Flag
\dpfillpat	<a href="#">Drawing Objects</a>	Value
\dpgroup	<a href="#">Drawing Objects</a>	Flag
\dpline	<a href="#">Drawing Objects</a>	Flag
\dplinecob	<a href="#">Drawing Objects</a>	Value
\dplinecog	<a href="#">Drawing Objects</a>	Value
\dplinecor	<a href="#">Drawing Objects</a>	Value
\dplinedado	<a href="#">Drawing Objects</a>	Flag
\dplinedadodo	<a href="#">Drawing Objects</a>	Flag
\dplinedash	<a href="#">Drawing Objects</a>	Flag
\dplinedot	<a href="#">Drawing Objects</a>	Flag
\dplinegray	<a href="#">Drawing Objects</a>	Value

<code>\dplinehollow</code>	<a href="#">Drawing Objects</a>	Flag
<code>\dplinepal</code>	<a href="#">Drawing Objects</a>	Flag
<code>\dplinesolid</code>	<a href="#">Drawing Objects</a>	Flag
<code>\dplinew</code>	<a href="#">Drawing Objects</a>	Value
<code>\dppolycount</code>	<a href="#">Drawing Objects</a>	Value
<code>\dppolygon</code>	<a href="#">Drawing Objects</a>	Flag
<code>\dppolyline</code>	<a href="#">Drawing Objects</a>	Flag
<code>\dpptx</code>	<a href="#">Drawing Objects</a>	Value
<code>\dppty</code>	<a href="#">Drawing Objects</a>	Value
<code>\dprect</code>	<a href="#">Drawing Objects</a>	Flag
<code>\dproundr</code>	<a href="#">Drawing Objects</a>	Flag
<code>\dpshadow</code>	<a href="#">Drawing Objects</a>	Flag
<code>\dpshadx</code>	<a href="#">Drawing Objects</a>	Value
<code>\dpshady</code>	<a href="#">Drawing Objects</a>	Value
<code>\dptxbtlr</code> <sup>7.0</sup>	<a href="#">Drawing Objects</a>	Flag
<code>\dptxbx</code>	<a href="#">Drawing Objects</a>	Flag
<code>\dptxbxmar</code>	<a href="#">Drawing Objects</a>	Value
<code>\dptxbxtext</code>	<a href="#">Drawing Objects</a>	Destination
<code>\dptxlr<sup>7.0</sup>tb</code>	<a href="#">Drawing Objects</a>	Flag
<code>\dptxlr<sup>7.0</sup>tbv</code>	<a href="#">Drawing Objects</a>	Flag
<code>\dptxtbrl</code> <sup>7.0</sup>	<a href="#">Drawing Objects</a>	Flag
<code>\dptxtbrlv</code> <sup>7.0</sup>	<a href="#">Drawing Objects</a>	Flag
<code>\dpx</code>	<a href="#">Drawing Objects</a>	Value
<code>\dpxsize</code>	<a href="#">Drawing Objects</a>	Value
<code>\dpy</code>	<a href="#">Drawing Objects</a>	Value
<code>\dpysize</code>	<a href="#">Drawing Objects</a>	Value
<code>\dropcapli</code>	<a href="#">Positioned Objects and Frames</a>	Value
<code>\dropcapt</code>	<a href="#">Positioned Objects and Frames</a>	Value
<code>\ds</code>	<a href="#">Section Formatting Properties</a>	Value
<code>\dxfrtext</code>	<a href="#">Positioned Objects and Frames</a>	Value
<code>\dy</code>	<a href="#">Information Group</a>	Value
<code>\edmins</code>	<a href="#">Information Group</a>	Value
<code>\embo</code> <sup>97</sup>	<a href="#">Character Text</a>	Toggle
<code>\emdash</code>	<a href="#">Special Characters</a>	Symbol
<code>\emfblip</code> <sup>97</sup>	<a href="#">Pictures</a>	Flag
<code>\emspace</code>	<a href="#">Special Characters</a>	Symbol
<code>\endash</code>	<a href="#">Special Characters</a>	Symbol
<code>\enddoc</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\endnhere</code>	<a href="#">Section Formatting Properties</a>	Flag
<code>\endnotes</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\enforceprot<sup>2003</sup>N</code>	<a href="#">Document Formatting Properties</a>	Value
<code>\enspace</code>	<a href="#">Special Characters</a>	Symbol



\expnd	<a href="#">Font (Character) Formatting Properties</a>	Value
\expndtw	<a href="#">Font (Character) Formatting Properties</a>	Value
\expshrt <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag

F-L

\f	<a href="#">Font (Character) Formatting Properties</a>	Value
\faauto <sup>97</sup>	<a href="#">Paragraph Formatting Properties</a>	Value
\facenter <sup>7.0</sup>	<a href="#">Paragraph Formatting Properties</a>	Flag
\facingp	<a href="#">Document Formatting Properties</a>	Flag
\fahang <sup>7.0</sup>	<a href="#">Paragraph Formatting Properties</a>	Flag
\falt	<a href="#">Font Table</a>	Destination
\faroman <sup>7.0</sup>	<a href="#">Paragraph Formatting Properties</a>	Flag
\favar <sup>7.0</sup>	<a href="#">Paragraph Formatting Properties</a>	Flag
\fbiasN <sup>97</sup>	<a href="#">Font Table</a>	Value
\fbidi	<a href="#">Font Table</a>	Flag
\fchars <sup>7.0</sup>	<a href="#">Document Formatting Properties</a>	Destination
\fcharset	<a href="#">Font Table</a>	Value
\fdecor	<a href="#">Font Table</a>	Flag
\fet	<a href="#">Document Formatting Properties</a>	Value
\fetch	<a href="#">Font Table</a>	Flag
\ffdefres <sup>97</sup>	<a href="#">Form Fields</a>	Value
\ffdeftext <sup>97</sup>	<a href="#">Form Fields</a>	Destination
\ffentrymcr <sup>97</sup>	<a href="#">Form Fields</a>	Destination
\ffexitmcr <sup>97</sup>	<a href="#">Form Fields</a>	Destination
\ffformat <sup>97</sup>	<a href="#">Form Fields</a>	Destination
\ffhaslistboxN <sup>97</sup>	<a href="#">Form Fields</a>	Value
\ffhelptext <sup>97</sup>	<a href="#">Form Fields</a>	Destination
\ffhpsN <sup>97</sup>	<a href="#">Form Fields</a>	Value
\ffl <sup>97</sup>	<a href="#">Form Fields</a>	Destination
\ffmaxlen <sup>97</sup>	<a href="#">Form Fields</a>	Value
\ffname <sup>97</sup>	<a href="#">Form Fields</a>	Destination
\ffownhelpN <sup>97</sup>	<a href="#">Form Fields</a>	Value
\ffownstatN <sup>97</sup>	<a href="#">Form Fields</a>	Value
\ffprotN <sup>97</sup>	<a href="#">Form Fields</a>	Value
\ffrecalcN <sup>97</sup>	<a href="#">Form Fields</a>	Value
\ffresN <sup>97</sup>	<a href="#">Form Fields</a>	Value
\ffsizeN <sup>97</sup>	<a href="#">Form Fields</a>	Value
\ffstattext <sup>97</sup>	<a href="#">Form Fields</a>	Destination
\fftypeN <sup>97</sup>	<a href="#">Form Fields</a>	Value
\fftypetxtN <sup>97</sup>	<a href="#">Form Fields</a>	Value
\fi	<a href="#">Paragraph Formatting Properties</a>	Value
\fid	<a href="#">File Table</a>	Value
\field	<a href="#">Fields</a>	Destination
\file	<a href="#">File Table</a>	Destination
\filetbl	<a href="#">File Table</a>	Destination
<b>\fittxtN</b> <sup>2000</sup>	<a href="#">Font (Character) Formatting Properties</a>	Value
\fldalt	<a href="#">Document Formatting Properties</a>	Flag

\fddirty	<a href="#">Fields</a>	Flag
\fldedit	<a href="#">Fields</a>	Flag
\fldinst	<a href="#">Fields</a>	Destination
\fldlock	<a href="#">Fields</a>	Flag
\fldpriv	<a href="#">Fields</a>	Flag
\fldrslt	<a href="#">Fields</a>	Destination
\fldtype <sup>97</sup>	<a href="#">Fields</a>	Destination
\fmodern	<a href="#">Font Table</a>	Flag
\fn	<a href="#">Style Sheet</a>	Value
\fname <sup>7.0</sup>	<a href="#">Font Table</a>	Destination
\fnetwork	<a href="#">File Table</a>	Flag
\fnil	<a href="#">Font Table</a>	Flag
\fnonfilesys <sup>2002</sup>	<a href="#">File Table</a>	Flag
\fontemb	<a href="#">Font Table</a>	Destination
\fontfile	<a href="#">Font Table</a>	Destination
\fonttbl	<a href="#">Font Table</a>	Destination
\footer	<a href="#">Headers and Footers</a>	Destination
\footer	<a href="#">Headers and Footers</a>	Destination
\footerf	<a href="#">Headers and Footers</a>	Destination
\footerl	<a href="#">Headers and Footers</a>	Destination
\footery	<a href="#">Section Formatting Properties</a>	Value
\footnote	<a href="#">Footnotes</a>	Destination
\formdisp	<a href="#">Document Formatting Properties</a>	Flag
\formfield <sup>97</sup>	<a href="#">Form Fields</a>	Destination
\formprot	<a href="#">Document Formatting Properties</a>	Flag
\formshade	<a href="#">Document Formatting Properties</a>	Flag
\fosnum	<a href="#">File Table</a>	Value
\fprq	<a href="#">Font Table</a>	Value
\fracwidth	<a href="#">Document Formatting Properties</a>	Flag
\frelative	<a href="#">File Table</a>	Value
\frmtdtblr <sup>7.0</sup>	<a href="#">Positioned Objects and Frames</a>	Flag
\frmtdlrb <sup>7.0</sup>	<a href="#">Positioned Objects and Frames</a>	Flag
\frmtdlrbv <sup>7.0</sup>	<a href="#">Positioned Objects and Frames</a>	Flag
\frmtdtblr <sup>7.0</sup>	<a href="#">Positioned Objects and Frames</a>	Flag
\frmtdtblrv <sup>7.0</sup>	<a href="#">Positioned Objects and Frames</a>	Flag
\froman	<a href="#">Font Table</a>	Flag
<b>\fromhtml</b> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\fromtext <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\fs	<a href="#">Font (Character) Formatting Properties</a>	Value
\fscript	<a href="#">Font Table</a>	Flag
\fswiss	<a href="#">Font Table</a>	Flag
\ftnalt	<a href="#">Document Formatting Properties</a>	Flag

<code>\ftnbj</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftncn</code>	<a href="#">Document Formatting Properties</a>	Destination
<code>\ftnil</code>	<a href="#">Font Table</a>	Flag
<code>\ftnlytwine</code> <sup>2000</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnnalc</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnnar</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnnauc</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnnchi</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnnchosung</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnncnum</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnndbar</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnndbnum</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnndbnumd</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnndbnumk</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnndbnumt</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnnganada</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnngbnum</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnngbnumd</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnngbnumk</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnngbnuml</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnnrlc</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnnruc</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnnzodiac</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnnzodiacd</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnnzodiacl</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnrestart</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnrstcont</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnrstpg</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ftnsep</code>	<a href="#">Document Formatting Properties</a>	Destination
<code>\ftnsepc</code>	<a href="#">Document Formatting Properties</a>	Destination
<code>\ftnstart</code>	<a href="#">Document Formatting Properties</a>	Value
<code>\ftntj</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\fttruetype</code>	<a href="#">Font Table</a>	Flag
<code>\fvaliddos</code>	<a href="#">File Table</a>	Flag
<code>\fvalidhpfs</code>	<a href="#">File Table</a>	Flag
<code>\fvalidmac</code>	<a href="#">File Table</a>	Flag
<code>\fvalidntfs</code>	<a href="#">File Table</a>	Flag
<code>\g</code> <sup>97</sup>	<a href="#">Font (Character) Formatting Properties</a>	Destination
<code>\gcw</code> <sup>97</sup>	<a href="#">Font (Character) Formatting Properties</a>	Value
<code>\generator</code> <sup>2002</sup>	<a href="#">Generator</a>	Destination
<code>\green</code>	<a href="#">Color Table</a>	Value
<code>\gridtbl</code> <sup>97</sup>	<a href="#">Font (Character) Formatting Properties</a>	Destination

\gutter	<a href="#">Document Formatting Properties</a>	Value
\gutterprl <sup>7.0</sup>	<a href="#">Document Formatting Properties</a>	Flag
\guttersxn	<a href="#">Section Formatting Properties</a>	Value
\header	<a href="#">Headers and Footers</a>	Destination
\header	<a href="#">Headers and Footers</a>	Destination
\headerf	<a href="#">Headers and Footers</a>	Destination
\headerl	<a href="#">Headers and Footers</a>	Destination
\headery	<a href="#">Section Formatting Properties</a>	Value
\hich <sup>7.0</sup>	<a href="#">Associated Character Properties</a>	Flag
\highlight <sup>7.0</sup>	<a href="#">Highlighting</a>	Value
\hlfr <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Value
\hlinkbase <sup>97</sup>	<a href="#">Information Group</a>	Value
\hlloc <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Value
\hlsrc <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Value
\horzdoc <sup>7.0</sup>	<a href="#">Document Formatting Properties</a>	Flag
\horzsect <sup>7.0</sup>	<a href="#">Section Formatting Properties</a>	Flag
\hr	<a href="#">Information Group</a>	Value
\htmautsp <sup>2000</sup>	<a href="#">Document Formatting Properties</a>	Flag
\htmlbase	<a href="#">Control Words Introduced by Other Microsoft Products</a>	Flag
\htmlrtf	<a href="#">Control Words Introduced by Other Microsoft Products</a>	Toggle
\htmltag	<a href="#">Control Words Introduced by Other Microsoft Products</a>	Destination
\hyphauto	<a href="#">Document Formatting Properties</a>	Toggle
\hyphcaps	<a href="#">Document Formatting Properties</a>	Toggle
\hyphconsec	<a href="#">Document Formatting Properties</a>	Value
\hyphhotz	<a href="#">Document Formatting Properties</a>	Value
\hyphpar	<a href="#">Paragraph Formatting Properties</a>	Toggle
\i	<a href="#">Font (Character) Formatting Properties</a>	Toggle
\id	<a href="#">Information Group</a>	Value
\ilvl <sup>97</sup>	<a href="#">Paragraph Text</a>	Value
\impr <sup>97</sup>	<a href="#">Character Text</a>	Toggle
\info	<a href="#">Information Group</a>	Destination
\insrsidN <sup>2002</sup>	<a href="#">Track Changes (Revision Marks)</a>	Value
\intbl	<a href="#">Paragraph Formatting Properties</a>	Flag
\ipgpN <sup>2002</sup>	<a href="#">Paragraph Group Properties</a>	Value
\irowbandN <sup>2002</sup>	<a href="#">Table Definitions</a>	Value
\irowN <sup>2002</sup>	<a href="#">Table Definitions</a>	Value
\itapN <sup>2000</sup>	<a href="#">Paragraph Formatting Properties</a>	Value
\ixe	<a href="#">Index Entries</a>	Flag

<code>\jcompress</code> <sup>7.0</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\jexpand</code> <sup>7.0</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\jpegblip</code> <sup>97</sup>	<a href="#">Pictures</a>	Flag
<code>\jksu</code> <sup>2000</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\keep</code>	<a href="#">Paragraph Formatting Properties</a>	Flag
<code>\keepn</code>	<a href="#">Paragraph Formatting Properties</a>	Flag
<code>\kerning</code>	<a href="#">Font (Character) Formatting Properties</a>	Value
<code>\keycode</code>	<a href="#">Style Sheet</a>	Destination
<code>\keywords</code>	<a href="#">Information Group</a>	Destination
<code>\ksulangN</code> <sup>2000</sup>	<a href="#">Document Formatting Properties</a>	Value
<code>\landscape</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\lang</code>	<a href="#">Font (Character) Formatting Properties</a>	Value
<code>\langfeN</code> <sup>2000</sup>	<a href="#">Font (Character) Formatting Properties</a>	Value
<code>\langfenpN</code> <sup>2000</sup>	<a href="#">Font (Character) Formatting Properties</a>	Value
<code>\langnpN</code> <sup>2000</sup>	<a href="#">Font (Character) Formatting Properties</a>	Value
<code>\lastrow</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<code>\latentstyles</code> <sup>2003</sup>	<a href="#">Style and Formatting Restrictions</a>	Destination
<code>\lbrN</code> <sup>2000</sup>	<a href="#">Special Characters</a>	Symbol
<code>\lchars</code> <sup>7.0</sup>	<a href="#">Document Formatting Properties</a>	Destination
<code>\ldblquote</code>	<a href="#">Special Characters</a>	Symbol
<code>\level</code>	<a href="#">Paragraph Formatting Properties</a>	Value
<code>\levelfollowN</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\levelindentN</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\leveljcN</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\leveljcnN</code> <sup>2000</sup>	<a href="#">List Table</a>	Value
<code>\levellegalN</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\levelnfcN</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\levelnfcN</code> <sup>2000</sup>	<a href="#">List Table</a>	Value
<code>\levelnorestartN</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\levelnumbers</code> <sup>97</sup>	<a href="#">List Table</a>	Destination
<code>\leveloldN</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\levelpictureN</code> <sup>2002</sup>	<a href="#">List Table</a>	Value
<code>\levelprevN</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\levelprevspaceN</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\levelspaceN</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\levelstartatN</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\leveltemplateidN</code> <sup>2000</sup>	<a href="#">List Table</a>	Value
<code>\leveltext</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\li</code>	<a href="#">Paragraph Formatting Properties</a>	Value
<code>\line</code>	<a href="#">Special Characters</a>	Symbol
<code>\linebetcol</code>	<a href="#">Section Formatting Properties</a>	Flag
<code>\linecont</code>	<a href="#">Section Formatting Properties</a>	Flag

<code>\linemod</code>	<a href="#">Section Formatting Properties</a>	Value
<code>\lineppage</code>	<a href="#">Section Formatting Properties</a>	Flag
<code>\linerestart</code>	<a href="#">Section Formatting Properties</a>	Flag
<code>\linestart</code>	<a href="#">Document Formatting Properties</a>	Value
<code>\linestarts</code>	<a href="#">Section Formatting Properties</a>	Value
<code>\linex</code>	<a href="#">Section Formatting Properties</a>	Value
<code>\linkself</code>	<a href="#">Objects</a>	Flag
<code>\linkstyles</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\linkval</code> <sup>7.0</sup>	<a href="#">Information Group</a>	Value
<code>\linN</code> <sup>2000</sup>	<a href="#">Paragraph Formatting Properties</a>	Value
<code>\lisaN</code> <sup>2000</sup>	<a href="#">Paragraph Formatting Properties</a>	Value
<code>\lisbN</code> <sup>2000</sup>	<a href="#">Paragraph Formatting Properties</a>	Value
<code>\listhybrid</code> <sup>2000</sup>	<a href="#">List Table</a>	Flag
<code>\listidN</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\listname</code> <sup>97</sup>	<a href="#">List Table</a>	Destination
<code>\listoverridecountN</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\listoverrideformatN</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\listoverridestartN</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\listpictureN</code> <sup>2002</sup>	<a href="#">List Table</a>	Value
<code>\listrestarthdnN</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\listsimpleN</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\liststyleidN</code> <sup>2002</sup>	<a href="#">List Table</a>	Value
<code>\liststylename</code> <sup>2002</sup>	<a href="#">List Table</a>	Value
<code>\listtemplateidN</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\listtext</code> <sup>97</sup>	<a href="#">Paragraph Text</a>	Destination
<code>\Inbrkrule</code> <sup>2000</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\Indscpsxn</code>	<a href="#">Section Formatting Properties</a>	Flag
<code>\Inongrid</code> <sup>7.0</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\loch</code> <sup>7.0</sup>	<a href="#">Associated Character Properties</a>	Flag
<code>\lquote</code>	<a href="#">Special Characters</a>	Symbol
<code>\ls</code> <sup>97</sup>	<a href="#">List Table</a>	Value
<code>\lsdlockeddefN</code> <sup>2003</sup>	<a href="#">Style and Formatting Restrictions</a>	Value
<code>\lsdlockedexcept</code> <sup>2003</sup>	<a href="#">Style and Formatting Restrictions</a>	Destination
<code>\lsdstimaxN</code> <sup>2003</sup>	<a href="#">Style and Formatting Restrictions</a>	Value
<code>\ltrch</code>	<a href="#">Font (Character) Formatting Properties</a>	Flag
<code>\ltrdoc</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\ltrmark</code> <sup>2002</sup>	<a href="#">Special Characters</a>	Symbol
<code>\ltrpar</code>	<a href="#">Paragraph Formatting Properties</a>	Flag
<code>\ltrrow</code>	<a href="#">Table Definitions</a>	Flag
<code>\ltrsect</code>	<a href="#">Section Formatting Properties</a>	Flag
<code>\lytcalctblwd</code> <sup>2000</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\lytexcttp</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag



\lytptrtmet <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\lyttblrtr <sup>2000</sup>	<a href="#">Document Formatting Properties</a>	Flag

**M-O**

\mac	<a href="#">Character Set</a>	Flag
\macpict	<a href="#">Pictures</a>	Flag
\makebackup	<a href="#">Document Formatting Properties</a>	Flag
\manager <sup>7.0</sup>	<a href="#">Information Group</a>	Destination
\margb	<a href="#">Document Formatting Properties</a>	Value
\margbsxn	<a href="#">Section Formatting Properties</a>	Value
\margl	<a href="#">Document Formatting Properties</a>	Value
\marglsxn	<a href="#">Section Formatting Properties</a>	Value
\margmirror	<a href="#">Document Formatting Properties</a>	Flag
\margr	<a href="#">Document Formatting Properties</a>	Value
\margrsxn	<a href="#">Section Formatting Properties</a>	Value
\margt	<a href="#">Document Formatting Properties</a>	Value
\margtsxn	<a href="#">Section Formatting Properties</a>	Value
<b>\mhtmltag</b>	<a href="#">Control Words Introduced by Other Microsoft Products</a>	Destination
\min	<a href="#">Information Group</a>	Value
\mo	<a href="#">Information Group</a>	Value
\msmcap <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
<b>\nestcell</b> <sup>2000</sup>	<a href="#">Table Definitions</a>	Symbol
<b>\nestrow</b> <sup>2000</sup>	<a href="#">Table Definitions</a>	Symbol
<b>\nesttableprops</b> <sup>2000</sup>	<a href="#">Table Definitions</a>	Destination
\newtblstyrls <sup>2003</sup>	<a href="#">Document Formatting Properties</a>	Flag
\nextfile	<a href="#">Document Formatting Properties</a>	Destination
\nobrkwrptbl <sup>2002</sup>	<a href="#">Document Formatting Properties</a>	Flag
\nocolbal	<a href="#">Document Formatting Properties</a>	Flag
\nocompatoptions <sup>2002</sup>	<a href="#">Document Formatting Properties</a>	Flag
\nocwrap <sup>7.0</sup>	<a href="#">Paragraph Formatting Properties</a>	Flag
\noextrasprl	<a href="#">Document Formatting Properties</a>	Flag
\nofchars	<a href="#">Information Group</a>	Value
\nofcharsws <sup>97</sup>	<a href="#">Information Group</a>	Value
\nofpages	<a href="#">Information Group</a>	Value
\nofwords	<a href="#">Information Group</a>	Value
\nogrowautofit <sup>2003</sup>	<a href="#">Document Formatting Properties</a>	Flag
\noj kernpunct	<a href="#">Document Formatting Properties</a>	Flag
\nolead <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\noline	<a href="#">Paragraph Formatting Properties</a>	Flag
<b>\nolnhtadjtbl</b> <sup>2000</sup>	<a href="#">Document Formatting Properties</a>	Flag
<b>\nonesttables</b> <sup>2000</sup>	<a href="#">Table Definitions</a>	Destination
\nonshppict <sup>97</sup>	<a href="#">Pictures</a>	Flag
\nooverflow <sup>7.0</sup>	<a href="#">Paragraph Formatting Properties</a>	Flag
<b>\noproof</b> <sup>2000</sup>	<a href="#">Font (Character) Formatting Properties</a>	Flag
\nosectexpand <sup>97</sup>	<a href="#">Font (Character) Formatting Properties</a>	Flag

\nosnaplinegrid <sup>97</sup>	<a href="#">Paragraph Formatting Properties</a>	Flag
\nospaceforul <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\nosupersub	<a href="#">Font (Character) Formatting Properties</a>	Flag
\notabind	<a href="#">Document Formatting Properties</a>	Flag
\noultrlspace <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\nowidctlpar	<a href="#">Paragraph Formatting Properties</a>	Flag
\nowrap	<a href="#">Positioned Objects and Frames</a>	Flag
\nowwrap <sup>7.0</sup>	<a href="#">Paragraph Formatting Properties</a>	Flag
\noxlattoyen <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\objalias	<a href="#">Objects</a>	Destination
\objalign	<a href="#">Objects</a>	Value
\objattph <sup>7.0</sup>	<a href="#">Objects</a>	Flag
\objautlink	<a href="#">Objects</a>	Flag
\objclass	<a href="#">Objects</a>	Destination
\objcropb	<a href="#">Objects</a>	Value
\objcropl	<a href="#">Objects</a>	Value
\objcropr	<a href="#">Objects</a>	Value
\objcropt	<a href="#">Objects</a>	Value
\objdata	<a href="#">Objects</a>	Destination
\object	<a href="#">Objects</a>	Destination
\objemb	<a href="#">Objects</a>	Flag
\objh	<a href="#">Objects</a>	Value
\objhtml <sup>97</sup>	<a href="#">Objects</a>	Flag
\objicemb	<a href="#">Objects</a>	Flag
\objlink	<a href="#">Objects</a>	Flag
\objlock	<a href="#">Objects</a>	Flag
\objname	<a href="#">Objects</a>	Destination
\objocx <sup>97</sup>	<a href="#">Objects</a>	Flag
\objpub	<a href="#">Objects</a>	Flag
\objscalex	<a href="#">Objects</a>	Value
\objscaley	<a href="#">Objects</a>	Value
\objsect	<a href="#">Objects</a>	Destination
\objsetsize	<a href="#">Objects</a>	Flag
\objsub	<a href="#">Objects</a>	Flag
\objtime	<a href="#">Objects</a>	Destination
\objtransy	<a href="#">Objects</a>	Value
\objupdate	<a href="#">Objects</a>	Flag
\objw	<a href="#">Objects</a>	Value
\oldas <sup>2000</sup>	<a href="#">Document Formatting Properties</a>	Flag
\oldcprops <sup>2002</sup>	<a href="#">Track Changes (Revision Marks)</a>	Destination
\oldlinewrap <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\oldpprops <sup>2002</sup>	<a href="#">Track Changes (Revision Marks)</a>	Destination

<code>\oldsprops</code> <sup>2002</sup>	<a href="#">Track Changes (Revision Marks)</a>	Destination
<code>\oldtprops</code> <sup>2002</sup>	<a href="#">Track Changes (Revision Marks)</a>	Destination
<code>\operator</code>	<a href="#">Information Group</a>	Destination
<code>\otblrul</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\outl</code>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\outlinelevelN</code> <sup>97</sup>	<a href="#">Paragraph Text</a>	Value
<code>\overlay</code> <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag

**P-R**

\page	<a href="#">Special Characters</a>	Symbol
\pagebb	<a href="#">Paragraph Formatting Properties</a>	Flag
\panose <sup>97</sup>	<a href="#">Font Table</a>	Destination
\paperh	<a href="#">Document Formatting Properties</a>	Value
\paperw	<a href="#">Document Formatting Properties</a>	Value
\par	<a href="#">Special Characters</a>	Symbol
\pararsidN <sup>2002</sup>	<a href="#">Track Changes (Revision Marks)</a>	Value
\pard	<a href="#">Paragraph Formatting Properties</a>	Flag
\pc	<a href="#">Character Set</a>	Flag
\pca	<a href="#">Character Set</a>	Flag
\pgbrdrb <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\pgbrdrfoot <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\pgbrdrhead <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\pgbrdrl <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\pgbrdroptN <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Value
\pgbrdr <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\pgbrdrsnap <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\pgbrdrt <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\pghsxn	<a href="#">Section Formatting Properties</a>	Value
\pgnbidia <sup>2000</sup>	<a href="#">Section Formatting Properties</a>	Flag
\pgnbidib <sup>2000</sup>	<a href="#">Section Formatting Properties</a>	Flag
\pgnchosung <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pgncnum <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pgncont	<a href="#">Section Formatting Properties</a>	Flag
\pgndbnum <sup>7.0</sup>	<a href="#">Section Formatting Properties</a>	Flag
\pgndbnumd <sup>7.0</sup>	<a href="#">Section Formatting Properties</a>	Flag
\pgndbnumk <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pgndbnumt <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pgndec	<a href="#">Section Formatting Properties</a>	Flag
\pgndecd <sup>7.0</sup>	<a href="#">Section Formatting Properties</a>	Flag
\pgnganada <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pgngbnum <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pgngbnumd <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pgngbnumk <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pgngbnuml <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pgnhindia <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
\pgnhindib <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
\pgnhindic <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
\pgnhindid <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
\pgnhn	<a href="#">Section Formatting Properties</a>	Value
\pgnhnsc	<a href="#">Section Formatting Properties</a>	Flag
\pgnhnsh	<a href="#">Section Formatting Properties</a>	Flag

\pgnhnsm	<a href="#">Section Formatting Properties</a>	Flag
\pgnhnsn	<a href="#">Section Formatting Properties</a>	Flag
\pgnhnsp	<a href="#">Section Formatting Properties</a>	Flag
\pgnidN <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Value
\pgncltr	<a href="#">Section Formatting Properties</a>	Flag
\pgnclcrm	<a href="#">Section Formatting Properties</a>	Flag
\pgnrestart	<a href="#">Section Formatting Properties</a>	Flag
\pgnstart	<a href="#">Document Formatting Properties</a>	Value
\pgnstarts	<a href="#">Section Formatting Properties</a>	Value
\pgnthaia <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
\pgnthaib <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
\pgnthaic <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
\pgnucltr	<a href="#">Section Formatting Properties</a>	Flag
\pgnucrm	<a href="#">Section Formatting Properties</a>	Flag
\pgnvieta <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
\pgnx	<a href="#">Section Formatting Properties</a>	Value
\pgny	<a href="#">Section Formatting Properties</a>	Value
\pgnzodiac <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pgnzodiacd <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pgnzodiacl <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pgp <sup>2002</sup>	<a href="#">Paragraph Group Properties</a>	Destination
\pgptbl <sup>2002</sup>	<a href="#">Paragraph Group Properties</a>	Destination
\pgwsxn	<a href="#">Section Formatting Properties</a>	Value
\phcol	<a href="#">Positioned Objects and Frames</a>	Flag
\phmrg	<a href="#">Positioned Objects and Frames</a>	Flag
\phpg	<a href="#">Positioned Objects and Frames</a>	Flag
\picbmp	<a href="#">Pictures</a>	Flag
\picbpp	<a href="#">Pictures</a>	Value
\piccropb	<a href="#">Pictures</a>	Value
\piccropl	<a href="#">Pictures</a>	Value
\piccropr	<a href="#">Pictures</a>	Value
\piccropt	<a href="#">Pictures</a>	Value
\pich	<a href="#">Pictures</a>	Value
\pichgoal	<a href="#">Pictures</a>	Value
\picprop <sup>97</sup>	<a href="#">Pictures</a>	Destination
\picscaled	<a href="#">Pictures</a>	Flag
\picscalex	<a href="#">Pictures</a>	Value
\picscaley	<a href="#">Pictures</a>	Value
\pict	<a href="#">Pictures</a>	Destination
\picw	<a href="#">Pictures</a>	Value
\picwgoal	<a href="#">Pictures</a>	Value
\plain	<a href="#">Font (Character) Formatting Properties</a>	Flag



\pmmetafile	<a href="#">Pictures</a>	Value
\pn	<a href="#">Bullets and Numbering</a>	Destination
\pnacross	<a href="#">Bullets and Numbering</a>	Flag
\pnaiu <sup>7.0</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnaiud <sup>7.0</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnaiueo <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnaiueod <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnb	<a href="#">Bullets and Numbering</a>	Toggle
\pnbidia <sup>2000</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnbidib <sup>2000</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pncaps	<a href="#">Bullets and Numbering</a>	Toggle
\pnCARD	<a href="#">Bullets and Numbering</a>	Flag
\pnCF	<a href="#">Bullets and Numbering</a>	Value
\pnchosung <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pncnum <sup>7.0</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnDBnum <sup>7.0</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnDBnumd <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnDBnumk <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnDBnuml <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnDBnumt <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnDEC	<a href="#">Bullets and Numbering</a>	Flag
\pnDECD <sup>7.0</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnf	<a href="#">Bullets and Numbering</a>	Value
\pnfs	<a href="#">Bullets and Numbering</a>	Value
\pnganada <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnganada <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pngblip <sup>97</sup>	<a href="#">Pictures</a>	Flag
\pngbnum <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pngbnumd <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pngbnumk <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pngbnuml <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnhang	<a href="#">Bullets and Numbering</a>	Flag
\pni	<a href="#">Bullets and Numbering</a>	Toggle
\pnindent	<a href="#">Bullets and Numbering</a>	Value
\pniroha <sup>7.0</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnirohad <sup>7.0</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnlctr	<a href="#">Bullets and Numbering</a>	Flag
\pnlcrm	<a href="#">Bullets and Numbering</a>	Flag
\pnlvi	<a href="#">Bullets and Numbering</a>	Value
\pnlviBlt	<a href="#">Bullets and Numbering</a>	Flag
\pnlviBody	<a href="#">Bullets and Numbering</a>	Flag
\pnlviCont	<a href="#">Bullets and Numbering</a>	Flag

\pnnumonce	<a href="#">Bullets and Numbering</a>	Flag
\pnord	<a href="#">Bullets and Numbering</a>	Flag
\pnordt	<a href="#">Bullets and Numbering</a>	Flag
\pnprev	<a href="#">Bullets and Numbering</a>	Flag
\pnqc	<a href="#">Bullets and Numbering</a>	Flag
\pnql	<a href="#">Bullets and Numbering</a>	Flag
\pnqr	<a href="#">Bullets and Numbering</a>	Flag
\pnrauthN <sup>97</sup>	<a href="#">Paragraph Text</a>	Value
\pnrdateN <sup>97</sup>	<a href="#">Paragraph Text</a>	Value
\pnrestart	<a href="#">Bullets and Numbering</a>	Flag
\pnrnfCN <sup>97</sup>	<a href="#">Paragraph Text</a>	Value
\pnrnot <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\pnrpnbrN <sup>97</sup>	<a href="#">Paragraph Text</a>	Value
\pnrrgbN <sup>97</sup>	<a href="#">Paragraph Text</a>	Value
\pnrstartN <sup>97</sup>	<a href="#">Paragraph Text</a>	Value
\pnrstopN <sup>97</sup>	<a href="#">Paragraph Text</a>	Value
\pnrxstN <sup>97</sup>	<a href="#">Paragraph Text</a>	Value
\pns caps	<a href="#">Bullets and Numbering</a>	Toggle
\pnseclvl	<a href="#">Bullets and Numbering</a>	Destination
\pnsp	<a href="#">Bullets and Numbering</a>	Value
\pnstart	<a href="#">Bullets and Numbering</a>	Value
\pnstrike	<a href="#">Bullets and Numbering</a>	Toggle
\pntext	<a href="#">Bullets and Numbering</a>	Destination
\pntxta	<a href="#">Bullets and Numbering</a>	Destination
\pntxtb	<a href="#">Bullets and Numbering</a>	Destination
\pnucltr	<a href="#">Bullets and Numbering</a>	Flag
\pnucrm	<a href="#">Bullets and Numbering</a>	Flag
\pnul	<a href="#">Bullets and Numbering</a>	Toggle
\pnuld	<a href="#">Bullets and Numbering</a>	Flag
\pnuldash <sup>7.0</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnuldashd <sup>7.0</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnuldashdd <sup>7.0</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnuldb	<a href="#">Bullets and Numbering</a>	Flag
\pnulhair <sup>7.0</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnulnone	<a href="#">Bullets and Numbering</a>	Flag
\pnulth <sup>7.0</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnulw	<a href="#">Bullets and Numbering</a>	Flag
\pnulwave <sup>7.0</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnzodiac <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnzodiacd <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\pnzodiacl <sup>97</sup>	<a href="#">Bullets and Numbering</a>	Flag
\posnegx	<a href="#">Positioned Objects and Frames</a>	Value

\posnegy	<a href="#">Positioned Objects and Frames</a>	Value
\posx	<a href="#">Positioned Objects and Frames</a>	Value
\posxc	<a href="#">Positioned Objects and Frames</a>	Flag
\posxi	<a href="#">Positioned Objects and Frames</a>	Flag
\posxl	<a href="#">Positioned Objects and Frames</a>	Flag
\posxo	<a href="#">Positioned Objects and Frames</a>	Flag
\posxr	<a href="#">Positioned Objects and Frames</a>	Flag
\posy	<a href="#">Positioned Objects and Frames</a>	Value
\posyb	<a href="#">Positioned Objects and Frames</a>	Flag
\posyc	<a href="#">Positioned Objects and Frames</a>	Flag
\posyil	<a href="#">Positioned Objects and Frames</a>	Flag
\posyin <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\posyout <sup>97</sup>	<a href="#">Paragraph Text</a>	Flag
\posyt	<a href="#">Positioned Objects and Frames</a>	Flag
\prcolbl	<a href="#">Document Formatting Properties</a>	Flag
\printdata	<a href="#">Document Formatting Properties</a>	Flag
\printim	<a href="#">Information Group</a>	Destination
\private <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Destination
\propname <sup>7.0</sup>	<a href="#">Information Group</a>	Value
\proptype <sup>7.0</sup>	<a href="#">Information Group</a>	Value
\protend <sup>2003</sup>	<a href="#">Protection Exceptions</a>	Destination
\protlevelN <sup>2003</sup>	<a href="#">Document Formatting Properties</a>	Value
\protstart <sup>2003</sup>	<a href="#">Protection Exceptions</a>	Destination
\protusertbl <sup>2003</sup>	<a href="#">User Protection Information</a>	Destination
\psover	<a href="#">Document Formatting Properties</a>	Flag
\psz	<a href="#">Document Formatting Properties</a>	Value
\pubauto	<a href="#">Macintosh Edition Manager Publisher Objects</a>	Flag
\pvmrg	<a href="#">Positioned Objects and Frames</a>	Flag
\pvpara	<a href="#">Positioned Objects and Frames</a>	Flag
\pvpg	<a href="#">Positioned Objects and Frames</a>	Flag
<b>\pwdN</b>	<a href="#">Control Words Introduced by Other Microsoft Products</a>	Destination
\pxe <sup>7.0</sup>	<a href="#">Index Entries</a>	Destination
\qc	<a href="#">Paragraph Formatting Properties</a>	Flag
\qd <sup>7.0</sup>	<a href="#">Paragraph Formatting Properties</a>	Flag
\qj	<a href="#">Paragraph Formatting Properties</a>	Flag
\qk <sup>2002</sup>	<a href="#">Paragraph Formatting Properties</a>	Flag
\ql	<a href="#">Paragraph Formatting Properties</a>	Flag
\qmspace <sup>7.0</sup>	<a href="#">Special Characters</a>	Symbol
\qr	<a href="#">Paragraph Formatting Properties</a>	Flag
\qt <sup>2002</sup>	<a href="#">Paragraph Formatting Properties</a>	Flag
\rawbgdkdiag <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag

<code>\rawclbgbdia</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<code>\rawclbgcross</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<code>\rawclbgdcross</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<code>\rawclbgdkcross</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<code>\rawclbgdkdcross</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<code>\rawclbgdkfdia</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<code>\rawclbgdkhor</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<code>\rawclbgdkvert</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<code>\rawclbgfdia</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<code>\rawclbghoriz</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<code>\rawclbgvert</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<code>\rdblquote</code>	<a href="#">Special Characters</a>	Symbol
<code>\readprot</code> <sup>2003</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\red</code>	<a href="#">Color Table</a>	Value
<code>\rempersonalinfo</code> <sup>2002</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\result</code>	<a href="#">Objects</a>	Destination
<code>\revauth</code>	<a href="#">Font (Character) Formatting Properties</a>	Value
<code>\revauthdelN</code> <sup>97</sup>	<a href="#">Character Text</a>	Value
<code>\revbar</code>	<a href="#">Document Formatting Properties</a>	Value
<code>\revdtm</code>	<a href="#">Font (Character) Formatting Properties</a>	Value
<code>\revdtmdelN</code> <sup>97</sup>	<a href="#">Character Text</a>	Value
<code>\revised</code>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\revisions</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\revprop</code>	<a href="#">Document Formatting Properties</a>	Value
<code>\revprot</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\revtbl</code>	<a href="#">Track Changes</a>	Destination
<code>\revtim</code>	<a href="#">Information Group</a>	Destination
<code>\ri</code>	<a href="#">Paragraph Formatting Properties</a>	Value
<code>\rinN</code> <sup>2000</sup>	<a href="#">Paragraph Formatting Properties</a>	Value
<code>\row</code>	<a href="#">Special Characters</a>	Symbol
<code>\rquote</code>	<a href="#">Special Characters</a>	Symbol
<code>\rsidN</code> <sup>2002</sup>	<a href="#">Track Changes (Revision Marks)</a>	Value
<code>\rsidrootN</code> <sup>2002</sup>	<a href="#">Track Changes (Revision Marks)</a>	Value
<code>\rsidtbl</code> <sup>2002</sup>	<a href="#">Track Changes (Revision Marks)</a>	Destination
<code>\rsltbmp</code>	<a href="#">Objects</a>	Flag
<code>\rslthtml</code> <sup>2000</sup>	<a href="#">Objects</a>	Flag
<code>\rsltmerge</code>	<a href="#">Objects</a>	Flag
<code>\rsltpict</code>	<a href="#">Objects</a>	Flag
<code>\rsltrtf</code>	<a href="#">Objects</a>	Flag
<code>\rslttxt</code>	<a href="#">Objects</a>	Flag
<code>\rtf</code>	<a href="#">RTF Version</a>	Destination
<code>\rtlch</code>	<a href="#">Font (Character) Formatting Properties</a>	Flag

<code>\rtldoc</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\rtlgutter</code> <sup>2000</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\rtlmark</code> <sup>2002</sup>	<a href="#">Special Characters</a>	Symbol
<code>\rtlpar</code>	<a href="#">Paragraph Formatting Properties</a>	Flag
<code>\rtlrow</code>	<a href="#">Table Definitions</a>	Flag
<code>\rtlsect</code>	<a href="#">Section Formatting Properties</a>	Flag
<code>\rx</code>	<a href="#">Index Entries</a>	Destination

**S-T**

<code>\s</code>	<a href="#">Paragraph Formatting Properties</a>	Value
<code>\sa</code>	<a href="#">Paragraph Formatting Properties</a>	Value
<code>\saautoN</code> <sup>2000</sup>	<a href="#">Paragraph Formatting Properties</a>	Toggle
<code>\saftnnalc</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnnar</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnnauc</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnnchi</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnnchosung</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnnncnum</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnndbar</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnndbnum</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnndbnumd</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnndbnumk</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnndbnumt</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnnganada</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnngbnum</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnngbnumd</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnngbnumk</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnngbnumt</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnnrlc</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnnruc</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnnzodiac</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnnzodiacd</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnnzodiacl</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnrestart</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnrstcont</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\saftnstart</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sautoupd</code> <sup>97</sup>	<a href="#">Style Sheet</a>	Flag
<code>\sb</code>	<a href="#">Paragraph Formatting Properties</a>	Value
<code>\sbasedon</code>	<a href="#">Style Sheet</a>	Value
<code>\sbautoN</code> <sup>2000</sup>	<a href="#">Paragraph Formatting Properties</a>	Toggle
<code>\sbkcol</code>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sbkeven</code>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sbknone</code>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sbkodd</code>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sbkpage</code>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sbys</code>	<a href="#">Paragraph Formatting Properties</a>	Flag
<code>\scaps</code>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\scompose</code> <sup>2000</sup>	<a href="#">Style Sheet</a>	Flag
<code>\sec</code>	<a href="#">Information Group</a>	Value
<code>\sect</code>	<a href="#">Special Characters</a>	Symbol
<code>\sectd</code>	<a href="#">Section Formatting Properties</a>	Flag

<code>\sectdefaultcl</code> <sup>97</sup>	<a href="#">Section Formatting Properties</a>	Value
<code>\sectexpandN</code> <sup>97</sup>	<a href="#">Section Formatting Properties</a>	Value
<code>\sectlinegridN</code> <sup>97</sup>	<a href="#">Section Formatting Properties</a>	Value
<code>\sectnum</code>	<a href="#">Special Characters</a>	Symbol
<code>\sectrsidN</code> <sup>2002</sup>	<a href="#">Track Changes (Revision Marks)</a>	Value
<code>\sectspecifycl</code> <sup>97</sup>	<a href="#">Section Formatting Properties</a>	Value
<b><code>\sectspecifygenN</code></b>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sectspecifyl</code> <sup>97</sup>	<a href="#">Section Formatting Properties</a>	Value
<code>\sectunlocked</code>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnbj</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnnalc</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnnar</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnnauc</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnnchi</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnnchosung</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnncnum</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnndbar</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnndbnum</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnndbnumd</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnndbnumk</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnndbnumt</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnnganada</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnngbnum</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnngbnumd</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnngbnumk</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnngbnuml</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnnrlc</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnnruc</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnnzodiac</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnnzodiacd</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnnzodiacl</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnrestart</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnrstcont</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnrstpg</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftnstart</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\sftntj</code> <sup>2002</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\shad</code>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\shading</code>	<a href="#">Paragraph Shading</a>	Value
<code>\shidden</code> <sup>97</sup>	<a href="#">Style Sheet</a>	Flag
<code>\shift</code>	<a href="#">Style Sheet</a>	Flag
<code>\shpbottomN</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Value



<code>\shpbxcolumn</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Flag
<code>\shpbxignore</code> <sup>2000</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Flag
<code>\shpbxmargin</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Flag
<code>\shpbxpage</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Flag
<code>\shpbyignore</code> <sup>2000</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Flag
<code>\shpbymargin</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Flag
<code>\shpbypage</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Flag
<code>\shpbypara</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Flag
<code>\shpfbldtxtN</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Value
<code>\shpfhdrN</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Value
<code>\shpgrp</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Value
<code>\shpleftN</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Value
<code>\shplidN</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Value
<code>\shplockanchor</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Flag
<code>\shppict</code> <sup>97</sup>	<a href="#">Pictures</a>	Destination
<code>\shprightN</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Value
<code>\shprslt</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Value
<code>\shptopN</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Value
<code>\shptxt</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Value
<code>\shpwrkN</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Value
<code>\shpwrN</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Value
<code>\shpzN</code> <sup>97</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Value
<code>\sl</code>	<a href="#">Paragraph Formatting Properties</a>	Value
<code>\slinkN</code> <sup>2002</sup>	<a href="#">Style Sheet</a>	Value
<code>\smult</code>	<a href="#">Paragraph Formatting Properties</a>	Value
<code>\slocked</code> <sup>2003</sup>	<a href="#">Style Sheet</a>	Flagged
<code>\snaptogridincell</code> <sup>2002</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\snext</code>	<a href="#">Style Sheet</a>	Value
<code>\softcol</code>	<a href="#">Special Characters</a>	Flag

--	--	--

\softlheight	<a href="#">Special Characters</a>	Value
\softline	<a href="#">Special Characters</a>	Flag
\softpage	<a href="#">Special Characters</a>	Flag
\spersonal <sup>2000</sup>	<a href="#">Style Sheet</a>	Flag
\splytwnine <sup>2000</sup>	<a href="#">Document Formatting Properties</a>	Flag
\sprsbsp <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\sprslnsp <sup>7.0</sup>	<a href="#">Document Formatting Properties</a>	Flag
\sprsspbf	<a href="#">Document Formatting Properties</a>	Flag
\sprstsm <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\sprstsp	<a href="#">Document Formatting Properties</a>	Flag
\spv <sup>2002</sup>	<a href="#">Paragraph Formatting Properties</a>	Flag
\sreply <sup>2000</sup>	<a href="#">Style Sheet</a>	Flag
\ssemihidden <sup>2002</sup>	<a href="#">Style Sheet</a>	Flag
\staticval <sup>7.0</sup>	<a href="#">Information Group</a>	Value
\textflow <sup>97</sup>	<a href="#">Section Text</a>	Value
\strike	<a href="#">Font (Character) Formatting Properties</a>	Toggle
\striked1 <sup>97</sup>	<a href="#">Character Text</a>	Toggle
\stshfbiN <sup>2002</sup>	<a href="#">Default Fonts</a>	Value
\stshfdbchN <sup>2002</sup>	<a href="#">Default Fonts</a>	Value
\stshfhichN <sup>2002</sup>	<a href="#">Default Fonts</a>	Value
\stshflochN <sup>2002</sup>	<a href="#">Default Fonts</a>	Value
\stylelock <sup>2003</sup>	<a href="#">Document Formatting Properties</a>	Flag
\stylelockbackcomp <sup>2003</sup>	<a href="#">Document Formatting Properties</a>	Flag
\stylelockenforced <sup>2003</sup>	<a href="#">Document Formatting Properties</a>	Flag
\stylesheet	<a href="#">Style Sheet</a>	Destination
\styrsidN <sup>2002</sup>	<a href="#">Track Changes (Revision Marks)</a>	Value
\sub	<a href="#">Font (Character) Formatting Properties</a>	Flag
\subdocument	<a href="#">Paragraph Formatting Properties</a>	Value
\subfontbysize <sup>7.0</sup>	<a href="#">Document Formatting Properties</a>	Flag
\subject	<a href="#">Information Group</a>	Destination
\super	<a href="#">Font (Character) Formatting Properties</a>	Flag
\svb <sup>2003</sup>	<a href="#">Word 97 through Word 2003 RTF for Drawing Objects (Shapes)</a>	Destination
\swpbdr	<a href="#">Document Formatting Properties</a>	Flag
\tab	<a href="#">Special Characters</a>	Symbol
\tabsnoovrlp <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
\taprtl <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
\tb	<a href="#">Tabs</a>	Value
\tblkbestfit <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
\tblkborder <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
\tblkcolor <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
\tblkfont <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag

<code>\tbllkhdrcols</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tbllkhdrrows</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tbllklastcol</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tbllklastrow</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tbllkshading</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tblrsidN</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tc</code>	<a href="#">Table of Contents Entries</a>	Destination
<code>\tcelld</code> <sup>97</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tcf</code>	<a href="#">Table of Contents Entries</a>	Value
<code>\tcl</code>	<a href="#">Table of Contents Entries</a>	Value
<code>\tcn</code>	<a href="#">Table of Contents Entries</a>	Flag
<code>\tdfrmtxtBottomN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\tdfrmtxtLeftN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\tdfrmtxtRightN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\tdfrmtxtTopN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\template</code>	<a href="#">Document Formatting Properties</a>	Destination
<code>\time</code> <sup>97</sup>	<a href="#">Fields</a>	Flag
<code>\title</code>	<a href="#">Information Group</a>	Destination
<code>\titlepg</code>	<a href="#">Section Formatting Properties</a>	Flag
<code>\tldot</code>	<a href="#">Tabs</a>	Flag
<code>\tleq</code>	<a href="#">Tabs</a>	Flag
<code>\tlhyph</code>	<a href="#">Tabs</a>	Flag
<code>\tlmdot</code> <sup>7.0</sup>	<a href="#">Tabs</a>	Flag
<code>\tlth</code>	<a href="#">Tabs</a>	Flag
<code>\tlul</code>	<a href="#">Tabs</a>	Flag
<code>\toplinepunct</code> <sup>2002</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\tphcol</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tphmrg</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tphpg</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tposnegxN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\tposnegyN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\tposxc</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tposxi</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tposxl</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tposxN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\tposxo</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tposxr</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tposy</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tposyb</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tposyc</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tposyil</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
<code>\tposyin</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag

<b>\tposyoutv</b> <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
<b>\tposyt</b> <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
<b>\tpvmrg</b> <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
<b>\tpvpara</b> <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
<b>\tpvpg</b> <sup>2000</sup>	<a href="#">Table Definitions</a>	Flag
<b>\tqc</b>	<a href="#">Tabs</a>	Flag
<b>\tqdec</b>	<a href="#">Tabs</a>	Flag
<b>\tqr</b>	<a href="#">Tabs</a>	Flag
<b>\transmf</b>	<a href="#">Document Formatting Properties</a>	Flag
<b>\trauthN</b> <sup>2002</sup>	<a href="#">Table Definitions</a>	Value
<b>\trautofitN</b> <sup>2000</sup>	<a href="#">Table Definitions</a>	Toggle
<b>\trgbdiag</b> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<b>\trbgcross</b> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<b>\trbgdcross</b> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<b>\trbgdkbdiag</b> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<b>\trbgdkcross</b> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<b>\trbgdkdcross</b> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<b>\trbgdkfdiag</b> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<b>\trbgdkhor</b> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<b>\trbgdkvert</b> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<b>\trbgfdiag</b> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<b>\trbghoriz</b> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<b>\trbgvert</b> <sup>2002</sup>	<a href="#">Table Definitions</a>	Flag
<b>\trbrdrb</b>	<a href="#">Table Definitions</a>	Flag
<b>\trbrdrh</b>	<a href="#">Table Definitions</a>	Flag
<b>\trbrdrl</b>	<a href="#">Table Definitions</a>	Flag
<b>\trbrdrr</b>	<a href="#">Table Definitions</a>	Flag
<b>\trbrdrt</b>	<a href="#">Table Definitions</a>	Flag
<b>\trbrdrv</b>	<a href="#">Table Definitions</a>	Flag
<b>\trcbpatN</b> <sup>2002</sup>	<a href="#">Table Definitions</a>	Value
<b>\trcfpatN</b> <sup>2002</sup>	<a href="#">Table Definitions</a>	Value
<b>\trdateN</b>	<a href="#">Table Definitions</a>	Value
<b>\trftsWidthAN</b> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<b>\trftsWidthBN</b> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<b>\trftsWidthN</b> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<b>\trgaph</b>	<a href="#">Table Definitions</a>	Value
<b>\trhdr</b>	<a href="#">Table Definitions</a>	Flag
<b>\trkeep</b>	<a href="#">Table Definitions</a>	Flag
<b>\trleft</b>	<a href="#">Table Definitions</a>	Value
<b>\trowd</b>	<a href="#">Table Definitions</a>	Flag
<b>\trpaddbN</b> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<b>\trpaddfbN</b> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value

<code>\trpaddflN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\trpaddfrN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\trpaddftN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\trpaddlN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\trpaddrN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\trpaddtN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\trpatN</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Value
<code>\trqc</code>	<a href="#">Table Definitions</a>	Flag
<code>\trql</code>	<a href="#">Table Definitions</a>	Flag
<code>\trqr</code>	<a href="#">Table Definitions</a>	Flag
<code>\trrh</code>	<a href="#">Table Definitions</a>	Value
<code>\trshdngN</code> <sup>2002</sup>	<a href="#">Table Definitions</a>	Value
<code>\trspdbN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\trspdfbN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\trspdfIN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\trspdfR</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\trspdfT</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\trspdlN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\trspdrN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\trspdtN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\truncatefontheight</code>	<a href="#">Document Formatting Properties</a>	Flag
<code>\trwWidthAN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\trwWidthBN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\trwWidthN</code> <sup>2000</sup>	<a href="#">Table Definitions</a>	Value
<code>\ts</code> <sup>2002</sup>	<a href="#">Style Sheet</a>	Value
<code>\tsbgbdiag</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbgcross</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbgdcross</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbgdkbdiag</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbgdkcross</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbgdkdcross</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbgdkfdiag</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbgdkhor</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbgdkvert</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbgfdiag</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbghoriz</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbgvert</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbrdrb</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbrdrdgl</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbrdrdgr</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbrdrh</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbrdrl</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag

<code>\tsbrdrr</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbrdrr</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbrdr</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbrdrv</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbandhorzeven</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbandhorzodd</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbandsh</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbandsv</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbandverteven</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsbandvertodd</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tscellcbpatN</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Value
<code>\tscellcfpatN</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Value
<code>\tscellpaddbN</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Value
<code>\tscellpaddfbN</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Value
<code>\tscellpaddfN</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Value
<code>\tscellpaddfrN</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Value
<code>\tscellpaddftN</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Value
<code>\tscellpaddIN</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Value
<code>\tscellpaddrN</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Value
<code>\tscellpaddtN</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Value
<code>\tscellpctN</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Value
<code>\tscellwidth</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tscellwidthfts</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsfirstcol</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsfirstrow</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsclastcol</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsclastrow</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsncell</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsncwcell</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tssecell</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tschwcell</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsd</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsnowrap</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsrowd</code> <sup>2002</sup>	<a href="#">Style Sheet</a>	Flag
<code>\tsvertalb</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsvertalc</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\tsvertalt</code> <sup>2002</sup>	<a href="#">Table Styles</a>	Flag
<code>\twoonone</code> <sup>7.0</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\tx</code>	<a href="#">Tabs</a>	Value
<code>\txe</code>	<a href="#">Index Entries</a>	Destination

**U-Z**



<code>\ucN</code> <sup>97</sup>	<a href="#">Unicode RTF</a>	Value
<code>\ud</code> <sup>97</sup>	<a href="#">Unicode RTF</a>	Destination
<code>\ul</code>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\ulcN</code> <sup>2000</sup>	<a href="#">Font (Character) Formatting Properties</a>	Value
<code>\uld</code>	<a href="#">Font (Character) Formatting Properties</a>	Flag
<code>\uldash</code> <sup>7.0</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\uldashd</code> <sup>7.0</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\uldashdd</code> <sup>7.0</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\uldb</code>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\ulhair</code> <sup>7.0</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\ulhwave</code> <sup>2000</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\ulldash</code> <sup>2000</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\ulnone</code>	<a href="#">Font (Character) Formatting Properties</a>	Flag
<code>\ulth</code> <sup>7.0</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\ulth</code> <sup>97</sup>	<a href="#">Character Text</a>	Toggle
<code>\ulthd</code> <sup>2000</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\ulthdash</code> <sup>2000</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\ulthdashd</code> <sup>2000</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\ulthdashdd</code> <sup>2000</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\ulthldash</code> <sup>2000</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\ululdbwave</code> <sup>2000</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\ulw</code>	<a href="#">Font (Character) Formatting Properties</a>	Flag
<code>\ulwave</code> <sup>7.0</sup>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\uN</code> <sup>97</sup>	<a href="#">Unicode RTF</a>	Value
<code>\up</code>	<a href="#">Font (Character) Formatting Properties</a>	Value
<code>\upr</code> <sup>97</sup>	<a href="#">Unicode RTF</a>	Destination
<code>\urtfN</code>	<a href="#">Control Words Introduced by Other Microsoft Products</a>	Destination
<code>\useltbain</code> <sup>2000</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\userprops</code> <sup>7.0</sup>	<a href="#">Information Group</a>	Destination
<code>\v</code>	<a href="#">Font (Character) Formatting Properties</a>	Toggle
<code>\vern</code>	<a href="#">Information Group</a>	Value
<code>\version</code>	<a href="#">Information Group</a>	Value
<code>\vertalb</code>	<a href="#">Section Formatting Properties</a>	Flag
<code>\vertalc</code>	<a href="#">Section Formatting Properties</a>	Flag
<code>\vertalj</code>	<a href="#">Section Formatting Properties</a>	Flag
<code>\vertalt</code>	<a href="#">Section Formatting Properties</a>	Flag
<code>\vertdoc</code> <sup>7.0</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\vertsect</code> <sup>7.0</sup>	<a href="#">Section Formatting Properties</a>	Flag
<code>\viewbkspN</code> <sup>2003</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\viewkindN</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Value
<code>\viewnobound</code> <sup>2002</sup>	<a href="#">Document Formatting Properties</a>	Flag
<code>\viewscaleN</code> <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Value

\viewzkN <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Value
\wbitmap	<a href="#">Pictures</a>	Value
\wbmbitspixel	<a href="#">Pictures</a>	Value
\wbmplanes	<a href="#">Pictures</a>	Value
\wbmwidthbytes	<a href="#">Pictures</a>	Value
\webhidden <sup>2000</sup>	<a href="#">Font (Character) Formatting Properties</a>	Flag
\widctlpar	<a href="#">Paragraph Formatting Properties</a>	Flag
\widowctrl	<a href="#">Document Formatting Properties</a>	Flag
\windowcaption <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Value
\wmetafile	<a href="#">Pictures</a>	Value
\wpeqn <sup>97</sup>	<a href="#">Fields</a>	Flag
\wpjst <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\wpsp <sup>97</sup>	<a href="#">Document Formatting Properties</a>	Flag
\wraptrsp	<a href="#">Document Formatting Properties</a>	Flag
\wrppunct <sup>2002</sup>	<a href="#">Document Formatting Properties</a>	Flag
\xe	<a href="#">Index Entries</a>	Destination
\xef	<a href="#">Index Entries</a>	Value
\yr	<a href="#">Information Group</a>	Value
\ytsN <sup>2002</sup>	<a href="#">Paragraph Formatting Properties</a>	Value
\yxe <sup>97</sup>	<a href="#">Index Entries</a>	Flag
\zwbo <sup>7.0</sup>	<a href="#">Special Characters</a>	Symbol
\zwj <sup>2002</sup>	<a href="#">Special Characters</a>	Symbol
\zwnbo <sup>7.0</sup>	<a href="#">Special Characters</a>	Symbol
\zwnj <sup>2002</sup>	<a href="#">Special Characters</a>	Symbol

## Appendix C: Control Words introduced by other Microsoft Products

### Pocket Word

Control word	Meaning
\pwdN	Substitute for \rtfN. Introduced by Pocket Word to distinguish its files from general RTF files. Currently only 1 is emitted and the number is ignored by the RTF reader.
\collapsed	Paragraph property active in outline view that specifies that the paragraph is collapsed (not viewed).
\urtfN	Identifies an RTF file in which all text characters are encoded in UTF-8. Only binary data escapes this transformation. Word does not read this encoding of RTF.

## Exchange (Used in RTF<->HTML Conversions)

Control word	Meaning
\fromtext	Indicates that the document was originally a plain text document.
\fromhtml	Indicates that the document was originally HTML and may contain encapsulated HTML tags. This keyword may be followed by a version number (currently 1).
\*\htmltag	Indicates that the destination is encapsulated HTML text (to be ignored by RTF readers, but used during reverse RTF->HTML conversion). This keyword is followed by a numeric parameter containing encapsulation flags.
\htmlrtf	Toggling keyword to mark pieces of RTF to be ignored during reverse RTF->HTML conversion. Lack of a parameter turns it on, parameter 0 turns it off.
\*\mhtmltag	Indicates that the destination is an encapsulated tag with rewritten URL links that should be used in a conversion to plain HTML. Typically, URL links are rewritten as automatically generated MHTML reference names or as absolute external links. The keyword is followed by the flag parameter (the same one as for the \htmltag keyword).
\htmlbase	Placeholder in front of encapsulated MHTML reference name that marks the place where the base URL should be appended. This keyword is only used inside the \mhtmltag destination.

The information contained in this document represents the current view of Microsoft Corporation on the issues discussed as of the date of publication. Because Microsoft must respond to changing market conditions, it should not be interpreted to be a commitment on the part of Microsoft, and Microsoft cannot guarantee the accuracy of any information presented after the date of publication.

This White Paper is for informational purposes only. MICROSOFT MAKES NO WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, AS TO THE INFORMATION IN THIS DOCUMENT.

Complying with all applicable copyright laws is the responsibility of the user. Without limiting the rights under copyright, no part of this document may be reproduced, stored in or introduced into a retrieval system, or transmitted in any form or by any means (electronic, mechanical, photocopying, recording, or otherwise), or for any purpose, without the express written permission of Microsoft Corporation.

Microsoft may have patents, patent applications, trademarks, copyrights, or other intellectual property rights covering subject matter in this document. Except as expressly provided in any written license agreement from Microsoft, the furnishing of this document does not give you any license to these patents, trademarks, copyrights, or other intellectual property.

□ 2004 Microsoft Corporation. All rights reserved.

Microsoft, DOS, Visual Basic, and Windows are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

The names of actual companies and products mentioned herein may be the trademarks of their respective owners.